

SHINE PRO - MODEL: EF2SI-200


Flood Luminaires




PROJECT:

TYPE:

Product Image

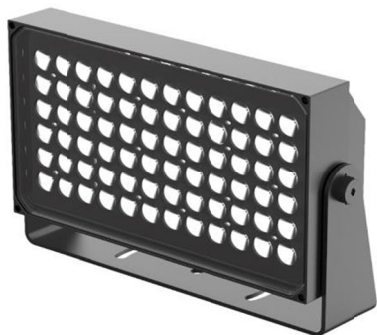

Line Drawing

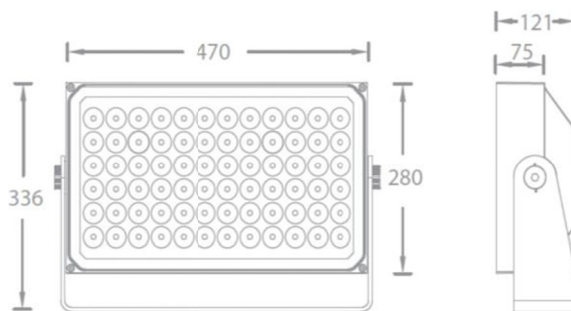

Product Description

SHINE PRO series is a professional LED floodlight designed by WAC for high-end outdoor lighting venues; Carefully designed with a unique appearance and a full glass surface design, it is simple and elegant, fashionable and beautiful, more suitable for current and future architectural trends. The lighting fixtures are equipped with W-Module modular design; Equipped with a breathing valve, it can effectively balance the internal and external air pressure to prevent condensation water; Fully integrating the principles of aerodynamics, creating the optimal heat dissipation structure, enhancing the heat dissipation performance of lighting fixtures, and extending the service life of LED lighting fixtures; Can precisely adjust the irradiation angle while designing a thoughtful angle locking structure to lock the projection direction; The SHINE PRO series lamps come in various sizes, angles, and power options to meet different lighting application solutions.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ W-Module
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical+90°/-30°
- Accessories: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: HP
- LED Power: 200W (Max)
- Source Lm: 2700K 13680lm ;3000K 14638lm; 4000K 15595lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K, Ra85 / 3000K, Ra85 / 4000K , Ra85
- SDCM: 3 SDCM
- Input: 220V/AC、50/60hz
- Dimming: ON-OFF / DMX512
- Net Weight: Approximately 25.6Kg without packing

Order Model

| Model | Power (W) | LEDs(quantity) | Max Lumens(Lm) | Control Systems | Beam | CCT | Finish |
|-----------|-----------|----------------|----------------|-----------------|-------|----------|-------------|
| EF2SI-200 | 200(Max) | 72 | 12192 (3000K) | ON-OFF | V 4° | 27 2700K | BK Black |
| | | | | 220V AC Power | S 7° | 30 3000K | |
| | | | | Supply DMX512 | 1 13° | 40 4000K | |
| | | | | Dimming 220V AC | 3 30° | | |
| | | | | Power Supply | 4 40° | | |
| | | | | J 12°x35° | | | |

Example: EF2SI-200EL-V30BK




SHINE PRO - MODEL: EF2SI-200
Flood Luminaires




PROJECT:

TYPE:

Accessory

| ITEM | Abbreviate | PIC | Model |
|-------------------|------------|--|--------------|
| Wall Washer Visor | WW1 |  | EF2SI-WW1-BK |
| Wall Washer Visor | WW2 |  | EF2SI-WW2-BK |
| Wall Washer Visor | WW3 |  | EF2SI-WW3-BK |

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



| | |
|--------------------|-------------------|
| MODEL: | EF2SI-200EL-V30BK |
| BEAM ANGLE: | 4.3° |
| POWER: | 200W (Max) |
| LUMENS: | 12192lm |
| CBCP: | / |
| EFFICACY: | 60.89lm /W |

SHINE PRO - MODEL: EF2SI-300

Flood Luminaires




PROJECT:

TYPE:

Product Image



Line Drawing

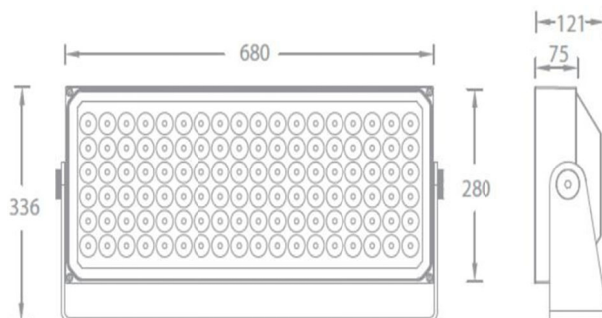

Product Description

SHINE PRO series is a professional LED floodlight designed by WAC for high-end outdoor lighting venues; Carefully designed with a unique appearance and a full glass surface design, it is simple and elegant, fashionable and beautiful, more suitable for current and future architectural trends. The lighting fixtures are equipped with W-Module modular design; Equipped with a breathing valve, it can effectively balance the internal and external air pressure to prevent condensation water; Fully integrating the principles of aerodynamics, creating the optimal heat dissipation structure, enhancing the heat dissipation performance of lighting fixtures, and extending the service life of LED lighting fixtures; Can precisely adjust the irradiation angle while designing a thoughtful angle locking structure to lock the projection direction; The SHINE PRO series lamps come in various sizes, angles, and power options to meet different lighting application solutions.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ W-Module
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical+90°/-30°
- Accessories: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: HP
- LED Power: 300W (Max)
- Source Lm: 2700K 20520lm; 3000K 21956lm; 4000K 23392lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K, Ra80 / 3000K, Ra80 / 4000K , Ra80
- SDCM: 3 SDCM
- Input: 220V/AC、50/60hz
- Dimming: ON-OFF / DMX512
- Net Weight: Approximately 39Kg without packing

Order Model

| Model | Power (W) | LEDs(quantity) | Max Lumens(Lm) | Control Systems | Beam | CCT | Finish |
|-----------|-----------|----------------|----------------|-----------------|-------|----------------------------------|-------------|
| EF2SI-300 | 300(Max) | 108 | 19204 (3000K) | ON-OFF | V 4° | 27 2700K 30 3000K 40 4000K | BK Black |
| | | | | 220V AC Power | S 7° | | |
| | | | | Supply DMX512 | 1 13° | | |
| | | | | Dimming 220V AC | 3 30° | | |
| | | | | Power Supply | 4 40° | | |
| | J 12°x35° | | | | | | |

Example: EF2SI-200EL-V30BK




SHINE PRO - MODEL: EF2SI-300
Flood Luminaires




PROJECT:

TYPE:

Accessory

| ITEM | Abbreviate | PIC | Model |
|-------------------|------------|--|--------------|
| Wall Washer Visor | WW1 |  | EF2SI-WW1-BK |
| Wall Washer Visor | WW2 |  | EF2SI-WW2-BK |
| Wall Washer Visor | WW3 |  | EF2SI-WW3-BK |

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



| | |
|--------------------|-------------------|
| MODEL: | EF2LI-300EL-V30BK |
| BEAM ANGLE: | 4.7° |
| POWER: | 300W (Max) |
| LUMENS: | 19204lm |
| CBCP: | / |
| EFFICACY: | 60.6lm/W |