

FUEGO COMPACT - MODEL: EIR9NF

In-ground Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

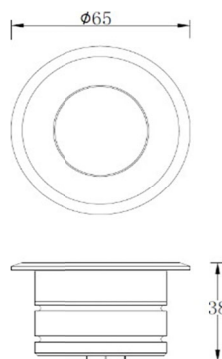

Product Description

The overall stainless steel material of Fuego Compact is finely processed, with a circular appearance, compact and exquisite design, ultra-thin appearance, IP67 protection level, IK08 impact resistance level, and can withstand pressure of 500kg. The embedded cylinder is easy to install.

Product Features

- Body Material:: stainless steel body and PVC embedded cylinder
- Optical System: Lens
- Finish: /
- Adjustable Angle: /
- Accessories: PVC embedded cylinder
- Certification: CQC
- IP Rating: IP67
- Insulation Level : Class III
- Operating Temperature: -20°C~50°C

Product Specifications

- LED Type: High Power LED
- LED Power: 2W (Max)
- Source Lm: 2700K 275lm ;3000K 300lm ;4000K 300lm;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K , 3000K, 4000K , Ra80
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF
- Net Weight: 0.175Kg without packing

Order Model

Model	comment	Power (W)	LEDs (quantity)	Max Lumens (Lm)	Control Systems	Beam	CCT	Finish
EIR9N	F Fixed	04 4(Max)	1	241	ET ON-OFF 24V DC Power Supply	1 15° 2 25° 3 35° 5 50°	27 2700K 30 3000K 40 4000K	SS Stainless Steel

Example: EIR9NF-04ET-127SS

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14, Lane 299, Bi Sheng Road, Shanghai 201204, China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2024-01-27

FUEGO COMPACT - MODEL: EIR9NF



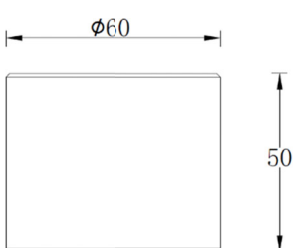
In-ground Luminaires

WAC


PROJECT:

TYPE:


Accessories

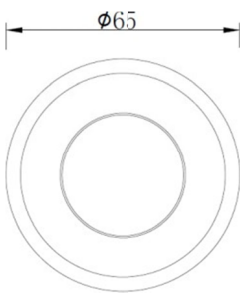Available For	Picture	Drawing	Model
			EIR9NF -RC001


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




MODEL:	EIR9NF-04ET-130SS
BEAM ANGLE:	14.8°
POWER:	5.6W (Max)
LUMENS:	364 lm
CBCP:	/
EFFICACY:	65 lm /W



MODEL:	EIR9NF-04ET-230SS
BEAM ANGLE:	23.7°
POWER:	5.6W (Max)
LUMENS:	375 lm
CBCP:	/
EFFICACY:	67 lm /W



MODEL:	EIR9NF-04ET-330SS
BEAM ANGLE:	37.4°
POWER:	5.6W (Max)
LUMENS:	370 lm
CBCP:	/
EFFICACY:	66 lm /W



MODEL :	EIR9NF-04ET-530SS
BEAM ANGLE:	51.7°
POWER:	5.6W (Max)
LUMENS:	347 lm
CBCP:	/
EFFICACY:	62 lm /W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
 44 Harbor Park Drive • Port Washington, NY
 Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
 14,Lane 299, Bi Sheng Road, Shanghai 201204,China
 Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-01-27