

FUEGO COMPACT - MODEL: EIR7TF

In-ground Luminaires

WAC LIGHTING
Responsible Lighting®


PROJECT :

TYPE :

Product Image



Line Drawing

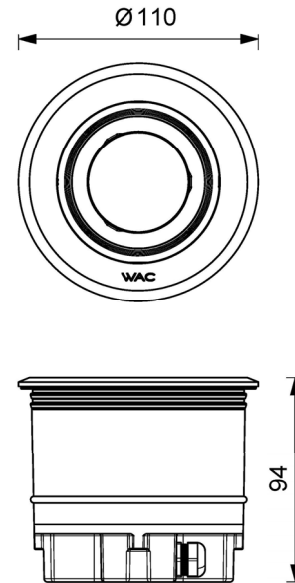

Product Description

The FUEGO Compact face frame is made of high-quality stainless steel, with the lamp body made of aluminum die-casting and high-temperature powder spraying, suitable for outdoor environments. It has an IP67 protection level and an IK08 impact resistance level, and can withstand pressure of 1500kg. Cooperate with the design of the embedded cylinder to facilitate customer installation and maintenance. High transmittance lens, applied in residential areas, squares, parks, shopping centers, sculpture decoration lighting, etc.

Product Features

- **Body Material:** Aluminum alloy die-casting + Stainless steel frame
- **Optical System:** Lens
- **Finish:** Static electricity powder coating
- **Adjustable Angle:** /
- **Accessories:** /
- **Certification:** CCC
- **IP Rating:** IP67 , IK08
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~50°C

Product Specifications

- **LED Type:** COB
- **LED Power:** 8.5W Max
- **Source Lm:** 3000K 935lm
- **LED Lifetime:** >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K , 3000K , 4000K , Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V AC/50Hz
- **Dimming:** ON-OFF
- **Net Weight:** 0.8Kg , without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EIR7T	F Fixed Lumens	08 8.5W	COB	885	EL ON-OFF 220V AC Power Supply	1 17°	27 2700K	SS Stainless Steel
						2 29°	30 3000K	
						4 47°	40 4000K	
						6 62°		

Example : EIR7TF-08EL-127SS

FUEGO COMPACT - MODEL: EIR7TF

In-ground Luminaires

WAC LIGHTING
Responsible Lighting®


PROJECT :

TYPE :


Accessory

Item	Description	Pic	Description Dimensions
EIR5TF-RC001	Recessed Casing		


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

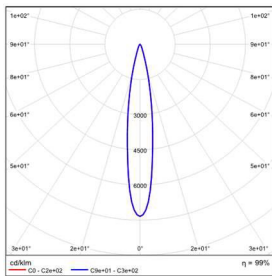


MODEL : EIR7TF-08EL-130SS
 BEAM ANGLE : 16.9°
 POWER : 10W
 LUMENS : 772 lm
 CBCP : /
 EFFICACY : 76.6 lm /W

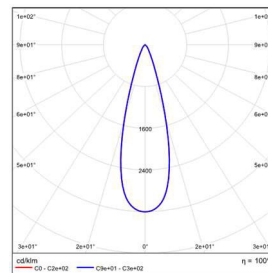

MODEL : EIR7TF-08EL-230SS
 BEAM ANGLE : 29.8°
 POWER : 10W
 LUMENS : 780.5 lm
 CBCP : /
 EFFICACY : 77.7 lm /W

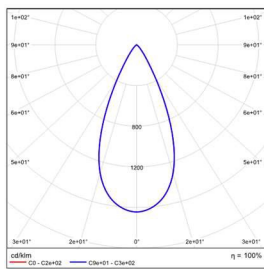

MODEL : EIR7TF-08EL-430SS
 BEAM ANGLE : 46.6°
 POWER : 10W
 LUMENS : 812 lm
 CBCP : /
 EFFICACY : 81.4 lm /W

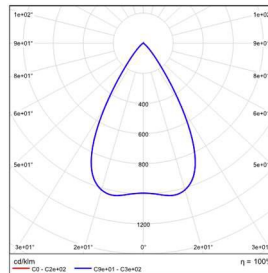

MODEL : EIR7TF-08EL-630SS
 BEAM ANGLE : 61.5°
 POWER : 10 W
 LUMENS : 884.5 lm
 CBCP : /
 EFFICACY : 88.7 lm /W

FUEGO COMPACT - MODEL: EIR8TF

In-ground Luminaires

WAC LIGHTING
Responsible Lighting®


PROJECT :

TYPE :

Product Image



Line Drawing

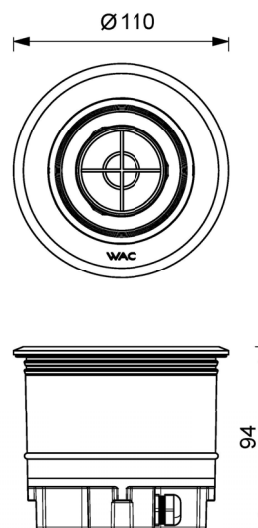

Product Description

The FUEGO Compact face frame is made of high-quality stainless steel, with the lamp body made of aluminum die-casting and high-temperature powder spraying, suitable for outdoor environments. It has an IP67 protection level and an IK08 impact resistance level, and can withstand pressure of 1500kg. Cooperate with the design of the embedded cylinder to facilitate customer installation and maintenance. High transmittance lens, applied in residential areas, squares, parks, shopping centers, sculpture decoration lighting, etc.

Product Features

- **Body Material:** Aluminum alloy die-casting + Stainless steel frame
- **Optical System:** Lens
- **Finish:** Static electricity powder coating
- **Adjustable Angle:** /
- **Accessories:** /
- **Certification:** CCC
- **IP Rating:** IP67 , IK08
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~50°C

Product Specifications

- **LED Type:** COB
- **LED Power:** 8.5W Max
- **Source Lm:** 3000K 935lm
- **LED Lifetime:** >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K , 3000K , 4000K , Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V AC/50Hz
- **Dimming:** ON-OFF
- **Net Weight:** 0.8Kg , without packing

Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EIR8T						1 17°	27 2700K	SS
Super	F Fixed	08 8.5W	COB	446	EL ON-OFF	2 27°	30 3000K	Stainless
Comfort					220V AC Power Supply	4 40°	40 4000K	Steel
						6 60°		

Example : EIR8TF-08EL-127SS

FUEGO COMPACT - MODEL: EIR8TF

In-ground Luminaires

WAC LIGHTING
Responsible Lighting®


PROJECT :

TYPE :

Accessory

Item	Description	Pic	Description Dimensions
EIR5TF-RC001	Recessed Casing		

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

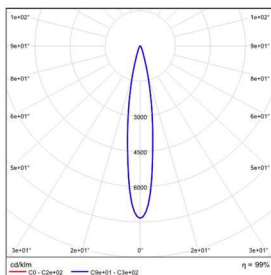

MODEL : EIR8TF-08EL-130SS


BEAM ANGLE : 17.3°

POWER : 10W

LUMENS : 435 lm

CBCP : /

EFFICACY : 43.6 lm /W

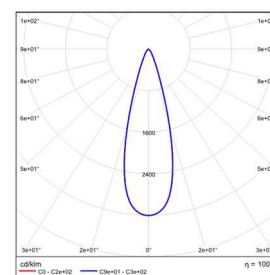

MODEL : EIR8TF-08EL-230SS


BEAM ANGLE : 26.5°

POWER : 10W

LUMENS : 432 lm

CBCP : /

EFFICACY : 43.4 lm /W

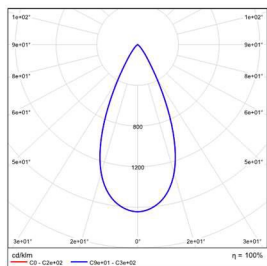

MODEL : EIR8TF-08EL-430SS


BEAM ANGLE : 38.8°

POWER : 10W

LUMENS : 417.5 lm

CBCP : /

EFFICACY : 41.6 lm /W

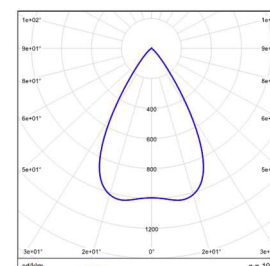

MODEL : EIR8TF-08EL-630SS

BEAM ANGLE : 58.7°

POWER : 10 W

LUMENS : 446 lm

CBCP : /

EFFICACY : 44.7 lm /W