

Installation instructions


一、Declaration of use

1. Please read all the instructions before installation and read the installation notes carefully;
2. Suitable for indoor drying places, can not be installed in the water environment;
3. Be sure to turn off the power before installation to prevent electric shock;
4. PC cover, PC embossing cover, first tear off the surface protection film when installing.


二、Description of lamps

The lamp according to different models, with different lengths and AC220V, DC24V, constant current three access power supply, according to the specific model, installation mode to choose slot size and matching power supply. Main materials and usage: profile, light source board, PC cover, PC embossing cover + diffusion plate (first install diffusion plate, diffusion plate frosted face outward; prism plate concave-convex face outward, smooth face inward), end cover, open-fitting fitting, lifting fitting, tinfoil and anti-leakage curing glue (used for jointing lamps).

三、Installation instructions: (1) Splicing method:

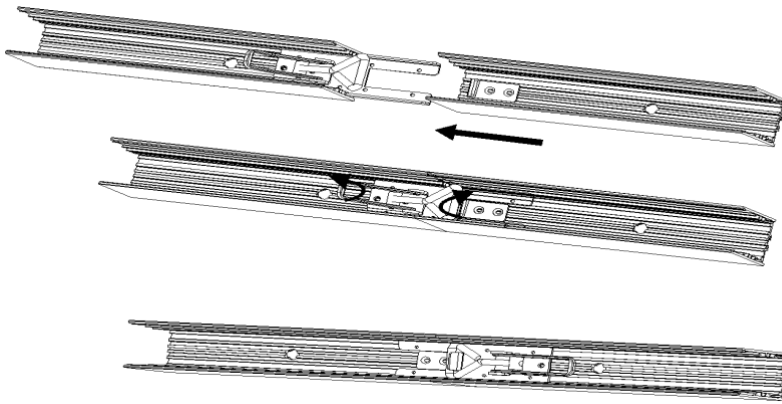


(2) Mask installation method:

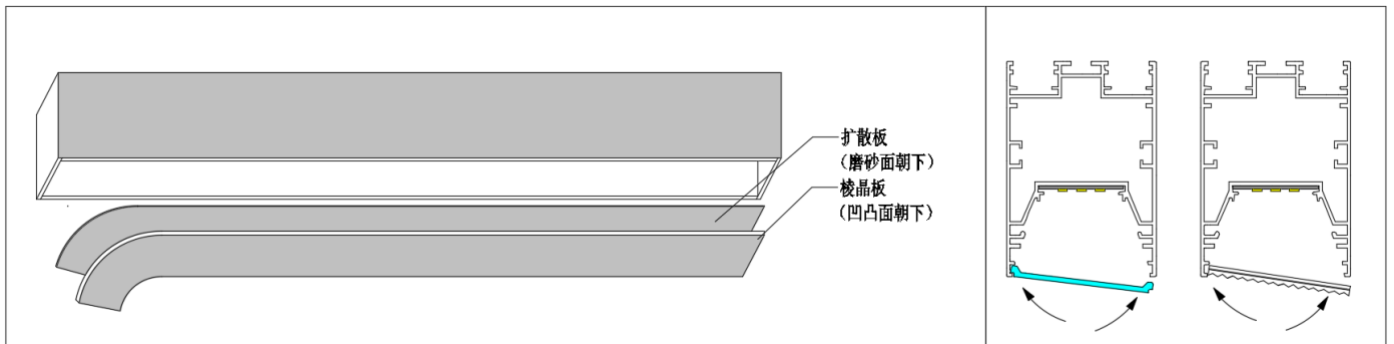


(3) Type of luminaire:

1. Top suction type



2. Hoisting type

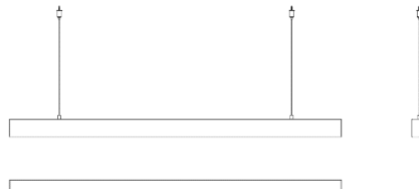

3. Embedded



固定即可，切勿完全锁紧！

(4) Installation mode

Licensed by "WAC" trademark holder - WAC LIGHTING, USA

Chinese Marketing Headquarters

Address

China factory

Address


: WAC Lighting (Shanghai) Co, Ltd.

: 14, Lane 299, Bi Sheng Road, Shanghai 201204, China

: Manufactured WAC Lighting (Dongguan) Co, Ltd.


: 390, Qingfeng Road, Qingxi Town, Dngguan, Guangdong. Postal code: 523653

1.Top suction installation

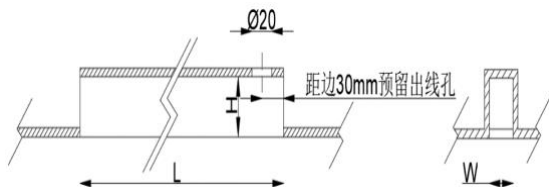

Slotted length $l =$
length of lamp+5mm
Slot width $W =$ lamp
width+5mm
Slot width depth $h =$
lamp height


No splicing

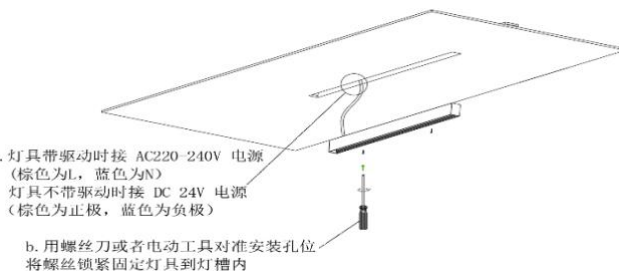

a. 灯具带驱动时接 AC220-240V 电源
(棕色为L, 蓝色为N)
灯具不带驱动时接 DC 24V 电源
(棕色为正极, 蓝色为负极)

b. 用螺丝刀或者电动工具对准安装孔位
将螺丝锁紧固定灯具到灯槽内

Splicing

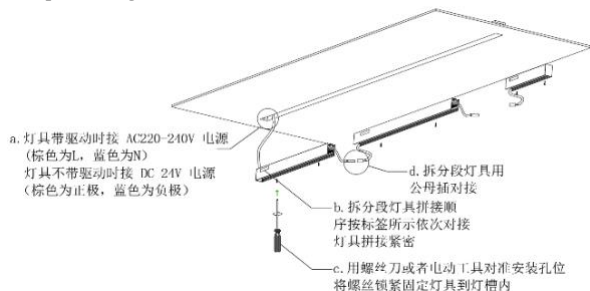


a. 灯具带驱动时接 AC220-240V 电源
(棕色为L, 蓝色为N)
灯具不带驱动时接 DC 24V 电源
(棕色为正极, 蓝色为负极)

d. 拆分段灯具用
公母插对接


b. 拆分段灯具拼接顺
序按标签所示依次对接
灯具拼接紧密

c. 用螺丝刀或者电动工具对准安装孔位
将螺丝锁紧固定灯具到灯槽内

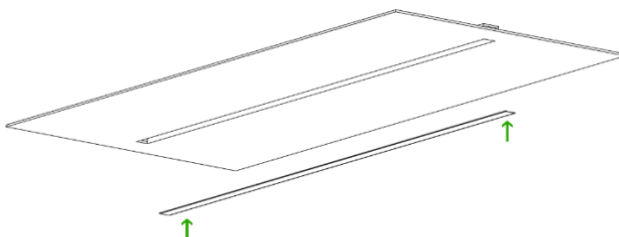


灯具固定后点亮确认安装无误后,
平稳扣入PC灯罩 (为避免拼接误差造成拼接后灯罩短出线漏缝, 配
备的灯罩会比额定长度长1-2cm, 拼接时将长出段裁切掉以达到无
漏光效果!)

2.Hoisting

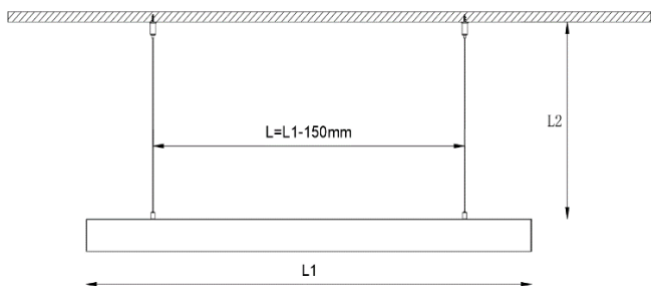

Splicing

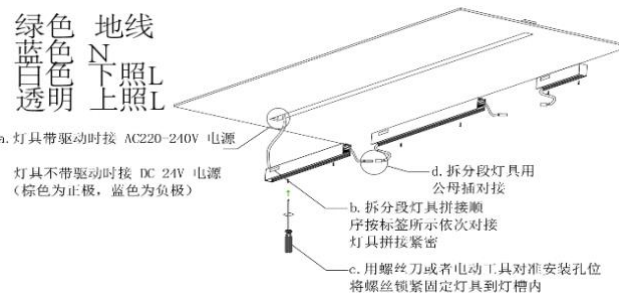


a. 灯具带驱动时接 AC220-240V 电源
灯具不带驱动时接 DC 24V 电源
(棕色为正极, 蓝色为负极)

b. 拆分段灯具拼接顺
序按标签所示依次对接
灯具拼接紧密

c. 用螺丝刀或者电动工具对准安装孔位
将螺丝锁紧固定灯具到灯槽内

No splicing

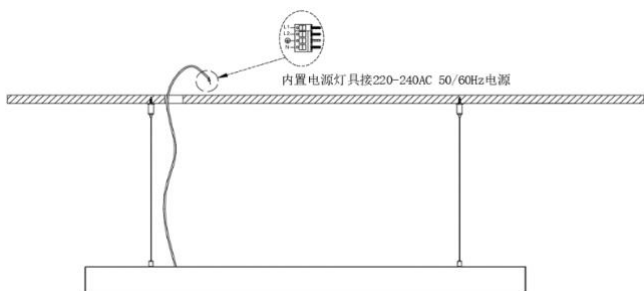


3.Embedded

How to use the installation accessories:


a.clamp the mounting accessories to the profile



b.When installing the ceiling, first install one end of the lamp body into the ceiling, then install the other end, pay attention to the ceiling hole ruler


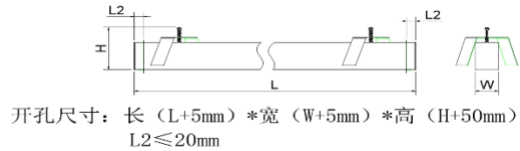


c.Install the lamp into the ceiling

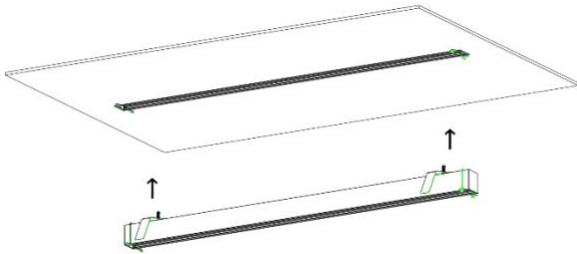

固定即可，切勿完全锁紧!

d. Install PC cover or prismatic plate (specific Operation Reference: mask

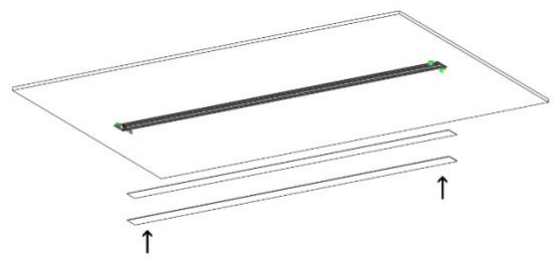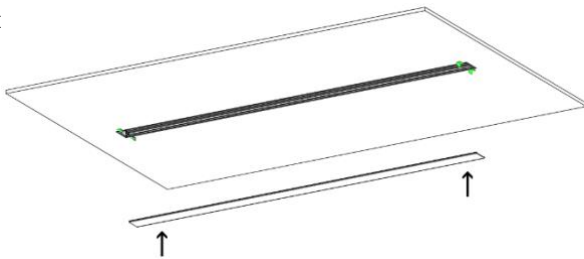

e.Remove the installation accessory

