

# FUEGO PRO - MODEL: EIL103-10

In-ground Luminaires

# WAC

PROJECT:

TYPE:

## Product Image



## Line Drawing



## Product Description

The Fuego Pro series buried lights are perfectly embedded and installed, with good consistency in light output. The specially equipped Gore breathing valve can effectively balance the internal and external air pressure to prevent condensation. The lighting fixtures are suitable for residential areas, hotels, squares, parks, and courtyards, and are suitable for local lighting.

## Product Features

- Body Material: Aluminum extruded lamp body, aluminum die cast end cover
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: Embedment
- Certification: CCC
- IP Rating: IP67 / IK08(Load capacity 2000Kg)
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

## Product Specifications

- LED Type: High Power
- Light power: 10W Max / 230mm
- Source Lm: 3000K 1830LM;4000K 684LM
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K, Ra80 /4000K, Ra80;
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: 0.8Kg without packing

## Order Model

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	CCT	Beam	Finish
<b>EIL103-10</b>	<b>230</b>	<b>10(Max)</b>	<b>4</b>	<b>653</b>	<b>EL</b> ON-OFF 24V /DC Power Supply	<b>30</b> 3000K	<b>1</b> 8°	<b>B</b> Black
					<b>MT</b> DMX512 Dimming 24V /DC Power Supply		<b>40</b> 4000K	

Example: EIL103-10ET-130-B

# FUEGO PRO - MODEL: EIL103-10

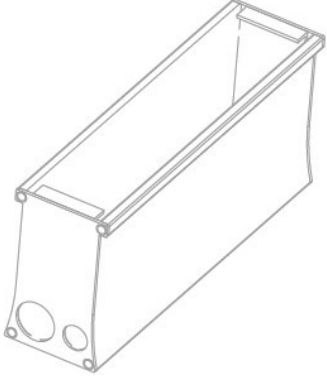

In-ground Luminaires

# WAC

PROJECT:

TYPE:

## Accessories

LINEAR	RECESSED CASING
Model	EIL1-RC023
	

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

# FUEGO PRO - MODEL: EIL105-28

In-ground Luminaires

# WAC

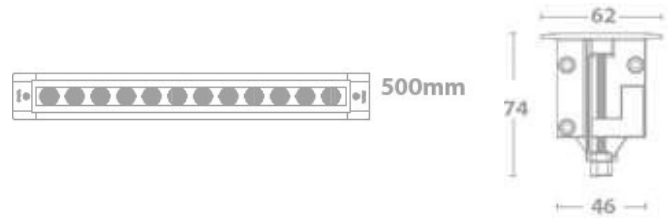
PROJECT:

TYPE:

## Product Image



## Line Drawing



## Product Description

The Fuego Pro series buried lights are perfectly embedded and installed, with good consistency in light output. The specially equipped Gore breathing valve can effectively balance the internal and external air pressure to prevent condensation. The lighting fixtures are suitable for residential areas, hotels, squares, parks, and courtyards, and are suitable for local lighting.

## Product Features

- Body Material: Aluminum extruded lamp body, aluminum die cast end cover
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: Embedment
- Certification: CCC
- IP Rating: IP67 / IK08(Load capacity 2000Kg)
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

## Product Specifications

- LED Type: High Power
- Light power: 28W Max / 500mm
- Source Lm: 3000K 1932LM;4000K 2052LM
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K, Ra80 /4000K, Ra80;
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: 1.7Kg without packing

## Order Model

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	CCT	Beam	Finish
<b>EIL105-28</b>	<b>500</b>	<b>28(Max)</b>	<b>12</b>	<b>1953</b>	<b>EL</b> ON-OFF 24V /DC Power Supply	<b>30</b> 3000K	<b>1</b> 8°	<b>B</b> Black
					<b>MT</b> DMX512 Dimming 24V /DC Power Supply		<b>40</b> 4000K	

Example: EIL105-28ET-130-B

# FUEGO PRO - MODEL: EIL105-28

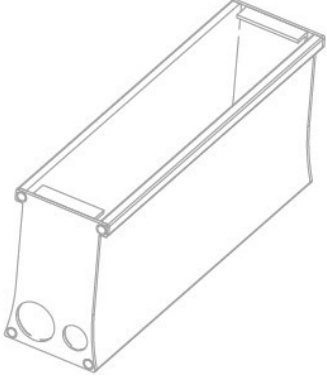

In-ground Luminaires

# WAC


PROJECT:

TYPE:

## Accessories

LINEAR	RECESSED CASING
Model	EIL1-RC023
	

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

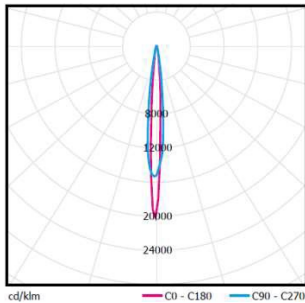

<b>MODEL:</b>	EIL105-28MT-E30-B
<b>BEAM ANGLE:</b>	9°x15°
<b>POWER:</b>	42.2W
<b>LUMENS:</b>	1896lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	45lm/W

# FUEGO PRO - MODEL: EIL110-56

In-ground Luminaires

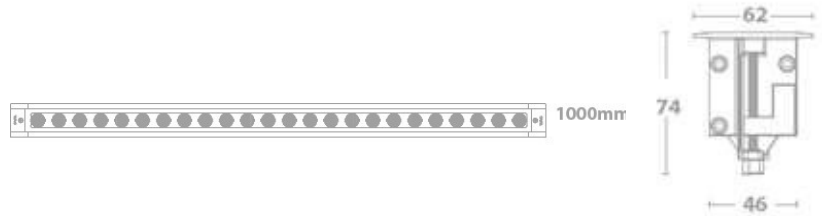
# WAC

PROJECT:

TYPE:

## Product Image

## Line Drawing



## Product Description

The Fuego Pro series buried lights are perfectly embedded and installed, with good consistency in light output. The specially equipped Gore breathing valve can effectively balance the internal and external air pressure to prevent condensation. The lighting fixtures are suitable for residential areas, hotels, squares, parks, and courtyards, and are suitable for local lighting.

## Product Features

- Body Material: Aluminum extruded lamp body, aluminum die cast end cover
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: Embedment
- Certification: CCC
- IP Rating: IP67 / IK08(Load capacity 2000Kg)
- Insulation Level: Class III
- Operating Temperature: -20°C~50°C

## Product Specifications

- LED Type: High Power
- Light power: 56W Max / 1000mm
- Source Lm: 3000K 3864LM;4000K 4104LM
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K, Ra80 /4000K, Ra80;
- SDCM: 3 SDCM
- Input: 24V DC
- Dimming: ON-OFF or DMX512 dimming control
- Net Weight: 3.1Kg without packing

## Order Model

Model	Length (mm)	Power (W)	LEDs (quantity)	Max Lumens(lm)	Control Systems	CCT	Beam	Finish
<b>EIL110-56</b>	<b>1000</b>	<b>56(Max)</b>	<b>24</b>	<b>3956</b>	<b>EL</b> ON-OFF 24V /DC Power Supply	<b>30</b> 3000K	<b>1</b> 8°	<b>B</b> Black
					<b>MT</b> DMX512 Dimming 24V /DC Power Supply		<b>40</b> 4000K	

Example: EIL110-56ET-130-B

# FUEGO PRO - MODEL: EIL110-56

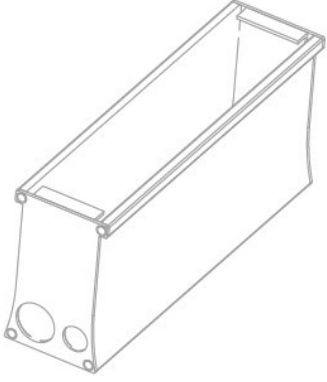

In-ground Luminaires

# WAC


PROJECT:

TYPE:

## Accessories

LINEAR	RECESSED CASING
Model	EIL1-RC023
	

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

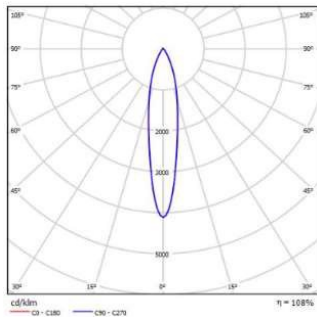

<b>MODEL:</b>	EIL110-56ET-230-B
<b>BEAM ANGLE:</b>	15°
<b>POWER:</b>	67.3W
<b>LUMENS:</b>	3443lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	51lm/W