

**Product model:**


This installation manual is applicable to the LED outdoor hard strip lamp ELD \* series, where "\*" includes information on different power levels, control systems, light angles, color temperatures, and appearance colors of the lamp.

**Precautions**


1. Please read the instruction manual carefully before installation;
2. Please hire a professional electrician for installation;
3. To avoid the risk of electric shock, please confirm to turn off the power before installation and maintenance;
4. Before installing the lighting fixtures, please confirm that the installation surface is firm and reliable to prevent the fixtures from falling;
5. Keep the instruction manual for reference only.

**Installation method and steps:**

1. Two installation brackets for the ELD210 \* and ELD205 \* series lamps, and one installation bracket for the ELD203 \* series lamps. The fixing hole spacing of the bracket is shown in Figure 1;
2. Use self tapping screws to fix the aluminum extrusion bracket on the curtain wall, as shown in Figure 2 (self tapping screws to be provided by the customer);
3. First, fix the steel cable rope at the corresponding position on the curtain wall, and then press the lamp directly into the aluminum extrusion bracket, as shown in Figures 3 and 4 (self tapping screws to be provided by the customer);

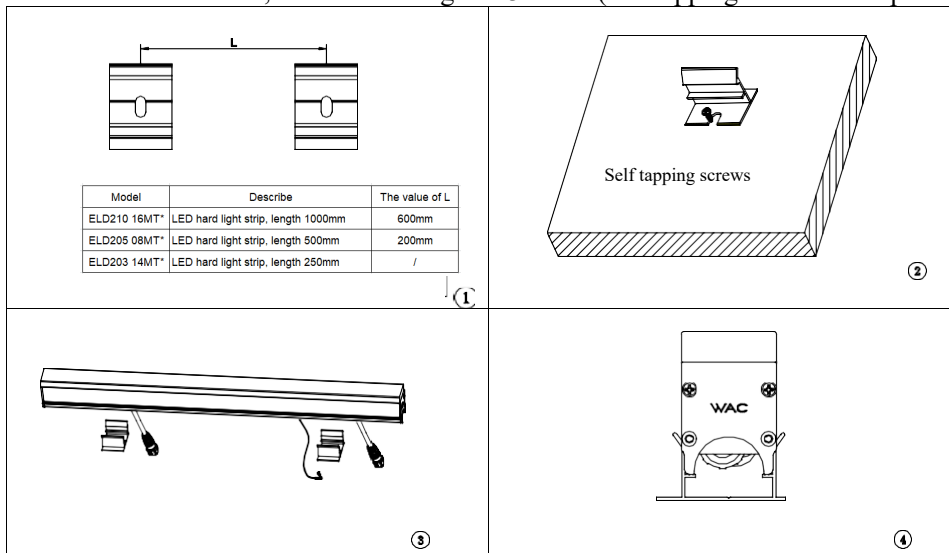

4. To install adjacent light strips, it is necessary to first position and fix the aluminum extrusion bracket, and then wire and fix the lighting fixture. The power cord of the lighting fixture is distinguished by the direction of the input and output terminals. Please wire according to the label content on the wire, as shown in Figure 5.

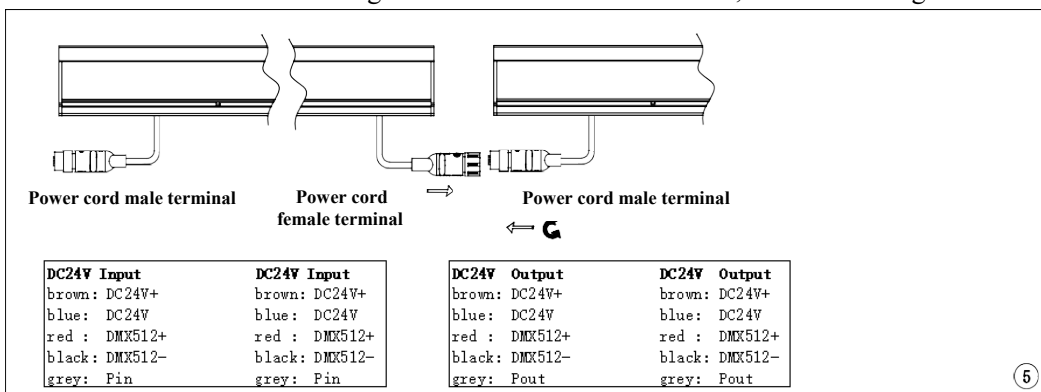

**Note:** It is recommended that the total length of the splicing of the lighting fixtures connected to each power circuit should not exceed 8 meters, and it is advisable to have no more than 26 lighting fixtures carried by each DMA signal amplifier. If there is interference, please increase the amplifier according to the on-site installation situation.