

# LANNE - MODEL: ER1MF-28

Down Luminaires

# WAC


PROJECT:

TYPE:

## Product Image



## Line Drawing

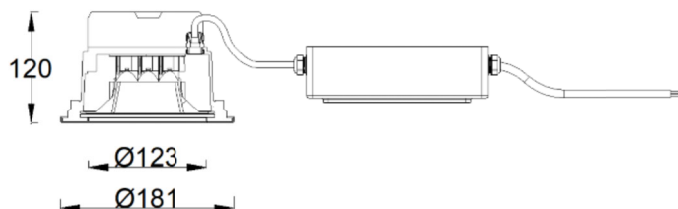

## Product Description

Lanne 6" aluminum alloy die-cast housing, surface black powder paint treatment, rapid heat dissipation white spray and stainless steel polished surface frame, beautiful appearance, no visible screws on the surface, 30 ° anti-glare Angle, less glare, equipped with high light transmission lens spiral structure fixed, can adapt to 5 50mm thick ceiling .

## Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ W-Module
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP65
- Insulation Level: Class 1
- Operating Temperature: -20°C~50°C

## Product Specifications

- Cut-out: Ø168mm
- LED Type: High power
- Shielding Angle: 30°
- LED Power: 28W (Max)
- Source Lm: 3000K 2286LM; 4000K 2457LM;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K Ra80 /4000K Ra80
- SDCM: 3 SDCM
- Input: 220V AC / 50/60Hz
- Dimming: ON-OFF/0-10V(Test the compatibility With the project site system in advance)
- Net Weight: 3.1Kg without packing

## Order Model

Model	Comment	Power (W)	LEDs (quantity)	Max lumens (lm)	Control system	Beam	CCT	Finish
<b>ERIS</b>	F Fix Version	28 28(Max)	9	1591	EL ON-OFF	S 7°	30 3000K	<b>WT</b> White Powder Coat
					220V/AC Power Supply	1 15°		
					DL 0-10V Dimming	2 25°		
					220V/AC Power Supply	4 40°		
						40 4000K	<b>BN</b> Brushed Nickel	

Example: ER1MF-28EL-S30WT

# LANNE - MODEL: ER1MF-28


Down Luminaires

# WAC


PROJECT:

TYPE:


## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




**MODEL:** ER1MF-28EL-S30WT  
**BEAM ANGLE:** 7°  
**POWER:** 33W(Max)  
**LUMENS:** 1591 lm  
**CBCP:** /  
**EFFICACY:** 48 lm/W



**MODEL:** ER1MF-28EL-130WT  
**BEAM ANGLE:** 15°  
**POWER:** 33W(Max)  
**LUMENS:** 1511 lm  
**CBCP:** /  
**EFFICACY:** 45.8 lm/W



**MODEL:** ER1MF-28EL-230WT  
**BEAM ANGLE:** 25°  
**POWER:** 33W(Max)  
**LUMENS:** 1517 lm  
**CBCP:** /  
**EFFICACY:** 45.8 lm/W



**MODEL:** ER1MF-28EL-430WT  
**BEAM ANGLE:** 40°  
**POWER:** 33W(Max)  
**LUMENS:** 1291 lm  
**CBCP:** /  
**EFFICACY:** 39 lm/W