

EUDURANCE™ BRICK - MODEL: WL5105

Step And Wall Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

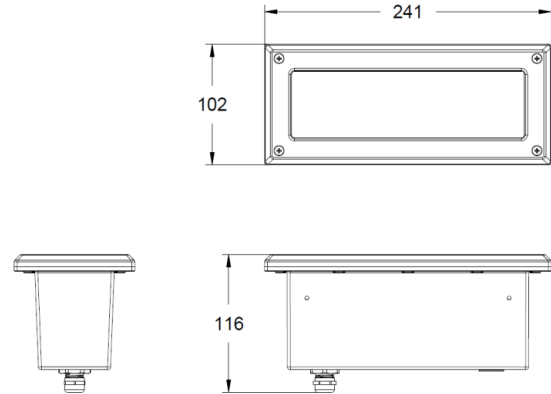

Product Description

The design of BRICK series lighting fixtures, designed to highlight the aesthetic appeal of buildings, stems from their seamless integration into the wall structure. Efficient energy conservation and optimized light output increase the safety and style of stairs, while maintaining minimal glare on walls and corridors. IP66 can provide indoor and outdoor lighting solutions even in damp places. 220V/AC direct wiring is available.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: /
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories/brackets: /
- Certification: CCC
- IP Rating: IP66
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

Product Specifications

- Cut-out: 207*68mm
- LED Type: SMD
- Light power: 5W/ LD05, 7.4W/ LD10
- Light tolerance: 3 SDCM
- Source Lm: 5W 3000K 473LM; 10W 3000K 711LM
- LED Lifetime: >40000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Ra90
- Input: 220V/AC, 50/60Hz
- Dimming: ON-OFF
- Net Weight: 1.25Kg without packing

Order Model

Model	Power (W)	Max lumens (Lm)	Control Systems	CCT	Finish
WL5105	LD05 5	137	E ON-OFF 220V/AC Power Supply	30 3000k	WT White Coat
	LD10 7.4	206		40 4000k	BK Black Coat BZ Bronze

Example: WL5105-LD05E-30WT

EUDURANCE™ BRICK - MODEL: WL5105


Step And Wall Luminaires

WAC


PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

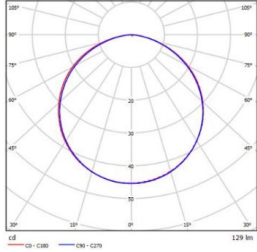

MODEL:	WL5105-LD05E-30WT
BEAM ANGLE:	115°
POWER:	5.8W
LUMENS:	129.4lm
CBCP:	/
EFFICACY:	22lm/W

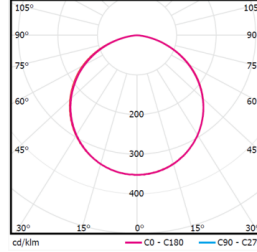

MODEL:	WL5105-LD10E-30WT
BEAM ANGLE:	115°
POWER:	9.3W
LUMENS:	203lm
CBCP:	/
EFFICACY:	22lm/W