

# ULTRA TUNABLE - MODEL: MTN26

2" Rectangular Trimless CCT Tunable Adjustable Downlight




PROJECT:

TYPE:

## Product Image



## Line Drawing

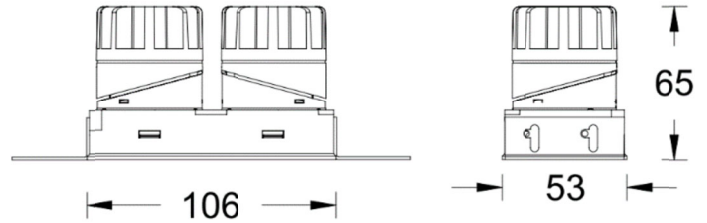

## Product Description

ULTRA rectangular trimless CCT tunable adjustable downlight , through a unique angle adjustment method, balancing the functions of illumination and adjustment(One lamp for multiple purposes),whole lamp sealed design, ensure no light leakage during the angle adjustment process, the lighting fixtures adopt modular design, on site lighting fixtures can be freely disassembled and replaced with reflectors and lamp bodies, so as to achieve free switching of various specifications and light output methods, perfect integration with ceiling after installation, the optical aspect adopts a new stealth technology, and equipped with adjustable color temperature, mainly suitable for indoor spaces such as hotels, villas, and commercial spaces.

## Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ SUBOROSA optical system
- Finish: Static electricity powder coating
- Adjustable Angle: 0-360° horizontal rotation and 0-30° vertical aiming tilt
- Accessories: As attached
- Certification: CCC/CE
- IP Rating: IP20(Light source cavity IP44)
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

## Product Specifications

- Cut-out: □116\*53
- Ceiling: 5mm~15mm Thickness
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: 2\*700LM
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K-6000K adjustable, Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: DALI
- Net Weight: 0.24Kg without packing

## Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
MTN Multiple Downlight N series	2	6	207	A DALI	2 24°	CC	B Black	WT White
	2"	Rectangular Trimless	COB 2*7W	N No Driver	3 36°	2700K-6000K (Tunable)	S Specular	BK Black
					5 50°			

Example: MTN25-207A-2CCSWT





# ULTRA TUNABLE - MODEL: MTN26

2" Rectangular Trimless CCT Tunable Adjustable Downlight




PROJECT:

TYPE:


<b>LENS-08-BEL</b> Striped glass lens 	<b>LENS-08-BSL</b> Soft glass lens 	<b>LENS-08-FR</b> Frosted glass lens 	<b>LENS-08-HCL</b> Honeycomb 
--	---	---	---

Note: A maximum of one optical accessory can be installed. The accessories are not shipped from the factory and need to be ordered separately.


## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	DLN26-LM07A-2CCSWT
<b>BEAM ANGLE:</b>	24°
<b>POWER:</b>	2*8.4W
<b>LUMENS:</b>	2*395lm
<b>CBCP:</b>	2*1992cd
<b>EFFICACY:</b>	47lm/W



<b>MODEL:</b>	DLN26-LM07A-3CCSWT
<b>BEAM ANGLE:</b>	36°
<b>POWER:</b>	2*8.4W
<b>LUMENS:</b>	2*380lm
<b>CBCP:</b>	2*769cd
<b>EFFICACY:</b>	45lm/W



<b>MODEL:</b>	DLN26-LM07A-5CCSWT
<b>BEAM ANGLE:</b>	50°
<b>POWER:</b>	2*8.4W
<b>LUMENS:</b>	2*348lm
<b>CBCP:</b>	2*499cd
<b>EFFICACY:</b>	41lm/W

# ULTRA TUNABLE - MODEL: MTN36

## 3" Rectangular Trimless CCT Tunable Adjustable Downlight




PROJECT:

TYPE:

### Product Image



### Line Drawing

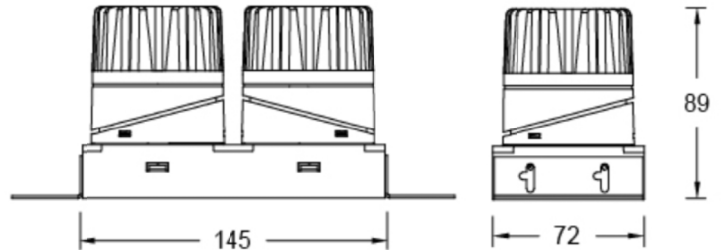

### Product Description

ULTRA rectangular trimless CCT tunable adjustable downlight , through a unique angle adjustment method, balancing the functions of illumination and adjustment(One lamp for multiple purposes),whole lamp sealed design, ensure no light leakage during the angle adjustment process, the lighting fixtures adopt modular design, on site lighting fixtures can be freely disassembled and replaced with reflectors and lamp bodies, so as to achieve free switching of various specifications and light output methods, perfect integration with ceiling after installation, the optical aspect adopts a new stealth technology, and equipped with adjustable color temperature, mainly suitable for indoor spaces such as hotels, villas, and commercial spaces.

### Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ SUBOROSA optical system
- Finish: Static electricity powder coating
- Adjustable Angle: 0-360° horizontal rotation and 0-30° vertical aiming tilt
- Accessories: As attached
- Certification: CCC/CE
- IP Rating: IP20(Light source cavity IP44)
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

### Product Specifications

- Cut-out: □150\*70
- Ceiling: 5mm~25mm Thickness
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: 2600LM
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K-6000K adjustable, Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: DALI
- Net Weight: 0.9Kg without packing

### Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
<b>DLN</b>	<b>3</b>	<b>6</b>	<b>213</b>	<b>A</b> DALI	<b>1</b> 18°	<b>CC</b>	<b>B</b> Black	<b>WT</b> White
Multiple Downlight N series	3"	Rectangular Trimless	COB 2*13W	<b>N</b> No Driver	<b>2</b> 28° <b>3</b> 36° <b>5</b> 50°	2700K-6000K (Tunable)	<b>S</b> Specular	<b>BK</b> Black

Example: DLN36-LM13A-2CCSWT

Note: 18 ° factory default with borderless honeycomb grille





# ULTRA TUNABLE - MODEL: MTN36

3" Rectangular Trimless CCT Tunable Adjustable Downlight




PROJECT:

TYPE:

<b>LENS-11-BEL</b> Striped glass lens 	<b>LENS-11-BSL</b> Soft glass lens 	<b>LENS-11-FR</b> Frosted glass lens 	<b>LENS-11-HCL</b> Honeycomb 
--	---	---	---


Note: A maximum of one optical accessory can be installed,( The accessories are not shipped from the factory and need to be ordered separately),  
 18 ° factory default with borderless honeycomb grille.

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	DLN36-LM13A-1CCSWT
<b>BEAM ANGLE:</b>	18°
<b>POWER:</b>	2*16W
<b>LUMENS:</b>	2*688lm
<b>CBCP:</b>	2*4588cd
<b>EFFICACY:</b>	43lm/W

<b>MODEL:</b>	DLN36-LM13A-2CCSWT
<b>BEAM ANGLE:</b>	28°
<b>POWER:</b>	2*16W
<b>LUMENS:</b>	2*1042lm
<b>CBCP:</b>	2*3976cd
<b>EFFICACY:</b>	65lm/W



<b>MODEL:</b>	DLN36-LM13A-3CCSWT
<b>BEAM ANGLE:</b>	36°
<b>POWER:</b>	2*16W
<b>LUMENS:</b>	2*923lm
<b>CBCP:</b>	2*2309cd
<b>EFFICACY:</b>	58lm/W

<b>MODEL:</b>	DLN36-LM13A-5CCSWT
<b>BEAM ANGLE:</b>	50°
<b>POWER:</b>	2*16W
<b>LUMENS:</b>	2*740lm
<b>CBCP:</b>	2*902cd
<b>EFFICACY:</b>	46lm/W

# ULTRA TUNABLE - MODEL: MTN46

4" Rectangular Trimless CCT Tunable Adjustable Downlight




PROJECT:

TYPE:

## Product Image



## Line Drawing

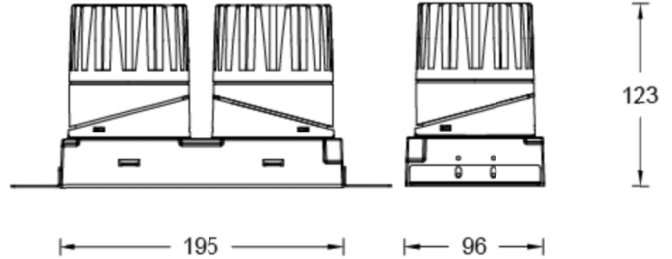

## Product Description

ULTRA rectangular trimless CCT tunable adjustable downlight , through a unique angle adjustment method, balancing the functions of illumination and adjustment(One lamp for multiple purposes),whole lamp sealed design, ensure no light leakage during the angle adjustment process, the lighting fixtures adopt modular design, on site lighting fixtures can be freely disassembled and replaced with reflectors and lamp bodies, so as to achieve free switching of various specifications and light output methods, perfect integration with ceiling after installation, the optical aspect adopts a new stealth technology, and equipped with adjustable color temperature, mainly suitable for indoor spaces such as hotels, villas, and commercial spaces.

## Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ SUBOROSA optical system
- Finish: Static electricity powder coating
- Adjustable Angle: 0-360° horizontal rotation and 0-30° vertical aiming tilt
- Accessories: As attached
- Certification: CCC/CE
- IP Rating: IP20(Light source cavity IP44)
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

## Product Specifications

- Cut-out: □205\*100
- Ceiling: 5mm~25mm Thickness
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: 2\*3000lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K-6000K adjustable, Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: DALI
- Net Weight: 0.8Kg without packing

## Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
<b>DLN</b>	<b>4</b>	<b>6</b>	<b>225</b>	<b>A</b> DALI	<b>1</b> 18°	<b>CC</b>	<b>B</b> Black	<b>WT</b> White
<b>Multiple</b>	<b>4"</b>	<b>Rectangular</b>	<b>COB 25W</b>	<b>N</b> No Driver	<b>2</b> 28°	<b>2700K-6000K</b>	<b>S</b> Specular	<b>BK</b> Black
<b>Downlight</b>		<b>Trimless</b>			<b>3</b> 36°	<b>(Tunable)</b>		
<b>N series</b>					<b>5</b> 50°			

Example: MTN45-225A-2CCSWT




# ULTRA TUNABLE - MODEL: MTN46

4" Rectangular Trimless CCT Tunable Adjustable Downlight




PROJECT:

TYPE:


<b>LENS-16-BEL</b> Striped glass lens 	<b>LENS-16-BSL</b> Soft glass lens 	<b>LENS-16-HCL</b> Honeycomb 
--	---	---

Note: A maximum of one optical accessory can be installed(Corresponding quantity of each lighting fixture 2pcs). The accessories are not shipped from the factory and need to be ordered separately.


## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




<b>MODEL:</b>	DLN46-LM25A-1CCSWT
<b>BEAM ANGLE:</b>	18°
<b>POWER:</b>	2*27W
<b>LUMENS:</b>	2*1672lm
<b>CBCP:</b>	2*11139cd
<b>EFFICACY:</b>	62lm/W



<b>MODEL:</b>	DLN46-LM25A-2CCSWT
<b>BEAM ANGLE:</b>	28°
<b>POWER:</b>	2*27W
<b>LUMENS:</b>	2*1821lm
<b>CBCP:</b>	2*8382cd
<b>EFFICACY:</b>	67lm/W



<b>MODEL:</b>	DLN46-LM25A-3CCSWT
<b>BEAM ANGLE:</b>	36°
<b>POWER:</b>	2*27W
<b>LUMENS:</b>	2*1502lm
<b>CBCP:</b>	2*2921cd
<b>EFFICACY:</b>	56lm/W



<b>MODEL:</b>	DLN46-LM25A-5CCSWT
<b>BEAM ANGLE:</b>	50°
<b>POWER:</b>	2*27W
<b>LUMENS:</b>	2*1469lm
<b>CBCP:</b>	2*2161cd
<b>EFFICACY:</b>	54lm/W