

# LIGNE II - MODEL: OP4012D

Linear Luminaires

# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

## Product Image



## Line Drawing

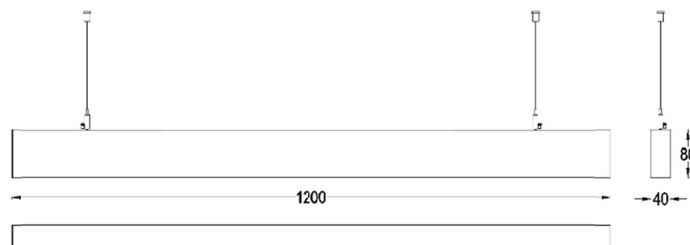

## Product Description

LIGNE II pendant lamp, aluminum lamp body, simple and beautiful appearance, up and down light, respectively, controllable, LED light source, with good heat dissipation, high efficiency and energy saving, good anti-glare, can be spliced from end to end, can be customized length. Suitable for lighting applications in commercial, office spaces.

## Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

## Product Specifications

- LED Type: SMD LED
- Source Lm: 4000K 4480lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K/5000K/Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V(Must be in advance with the project site system do a match test)
- Net Weight: 2.73Kg without packing

## Order Model

Model	Length (mm)	Comment	Power (W)	Driver	Beam up	Beam Down	CCT	Finish
OP40	12 1200	D Double Directional	40 40W	E ON-OFF D 0-10V Dimming	F Frosted	P (PC shade )	30 3000K	WT White
						Y (PC Embossed shade)	40 4000K	
							50 5000K	

Example : OP4012D-40E-FP30WT

Notes :( uplight: 10W, downlight: 30W)

## Accessories

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.com.cn (China)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)  
14,Lane 299, Bi Sheng Road,Shanghai 201204  
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products..2024-03-11

# LIGNE II - MODEL: OP4012D




Linear Luminaires

# WAC LIGHTING


Responsible Lighting®

PROJECT:

TYPE:

Model	Specification	Image
OP4012D-L	L-shaped splices	
OP4012D-T	L-shaped splices	
OP4012D-X	Cross-shaped splicings	

## Photometric Data @3000K



**MODEL:** OP4012D-40E-FP30WT

**BEAM**

/

**ANGLE :**

**POWER:** 43W

**LUMENS:** 3655 lm

**CBCP:**

/

**EFFICACY:** 85 lm/W

# LIGNE II - MODEL: OP4012D

Linear Luminaires

# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

## Product Image



## Line Drawing

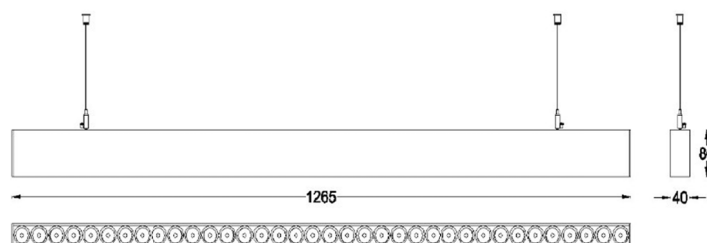

## Product Descriptions

LIGNE II pendant lamp, aluminum body, simple and beautiful appearance, up and down light, controllable, anti-glare grille, the use of LED light source, has good heat dissipation, high efficiency and energy saving, can be spliced from end to end, can be customized length. Suitable for lighting applications in commercial, office spaces.

## Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+ anti-glare grille optical system
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

## Product Specifications

- Shielding Angle: 38°
- LED Type: SMD LED
- Source Lm: 4000K 4580lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K/5000K/Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V (Must be in advance with the project site system do a match test)
- Net Weight: 2.85Kg without packing

## Order Model

Model	Length (mm)	Comment	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
OP40	12 1265	D Double Directional	40 40W	E ON-OFF D 0-10V Dimming	F Frosted	2 24°	30 3000K 40 4000K 50 5000K	WT White
						3 36°		
						4 45°		

Example: OP4012D-40E-F230WT

Notes: (uplight:10W, downlight: 30W)

## Accessories:

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.com.cn (China)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)  
14,Lane 299, Bi Sheng Road,Shanghai 201204  
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products..2024-03-11

# LIGNE II - MODEL: OP4012D

Linear Luminaires

# WAC LIGHTING


Responsible Lighting®

PROJECT:

TYPE:

## Photometric Data @3000K

Luminous emittance 1 / Polar LDC



**MODEL:** OP4012D-40E-F330WT

**BEAM** /

**ANGLE:** /

**POWER:** 43W

**LUMENS:** 3160.5 lm

**CBCP:** /

**EFFICACY:** 73.5 lm/W