

LIGNE II - MODEL: OP4012S

Linear Luminaires




PROJECT:

Light position number:

Product Image



Line Drawing

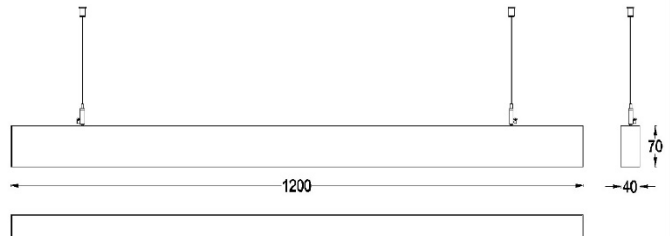

Product Description

LIGNE II cable light, the use of aluminum lamp body, simple and beautiful appearance, the use of LED light source, has good heat dissipation, high efficiency and energy saving, good anti-glare, can be splicing end to end, can be customized length. Suitable for commercial, office lighting applications.

Product Features

- Body Material: Aluminum alloy die-casting lamp body, insulated pressure resistant plastic electrical box
- Optical System: Lens
- Finish: Electrostatic powder spraying, black (BK), white (WT)
- Projection direction: /
- Accessories/Brackets: /
- Safety certification: /
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shading Angle: /
- Light source type: SMD LED
- Source Lm: 4000K 3780lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K/5000K/Ra90
- SDCM: 3SDCM
- Input voltage: 220V~240V AC/50Hz
- Dimming: ON-OFF/0-10V control (must be tested with the project site system in advance)
- Net Weight: 2.23Kg without packing

Order Model

Model	Length (mm)	Comment	Power (W)	Driver	Beam	CCT	Finish
OP40	12 1200	S Single Directional	30 30W	E ON-OFF D 0-10V Dimming	P (PC Face mask)	30 3000K	WT White
					Y (PC Embossed cover)	40 4000K	
						50 5000K	

Example: OP4012S-30E-P30WT

Accessories




Model number	Specification	Picture

LIGNE II - MODEL: OP4012S


Linear Luminaires

PROJECT:

Light position number:

<p>OP4012S-L</p>	<p>L-shaped splice</p>	
<p>OP4012S-T</p>	<p>T-splice</p>	
<p>OP4012S-X</p>	<p>Cruciform splice</p>	

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

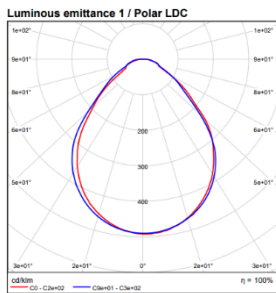

MODEL:	OP4012S-30E-P30WT
BEAM ANGLE:	/
POWER:	30.6W
LUMENS:	2601lm
CBCP:	/
EFFICACY:	85lm/W

LIGNE II - MODEL: OP4012S

Linear Luminaires




PROJECT:

Light position number:

Product Image



Line Drawing

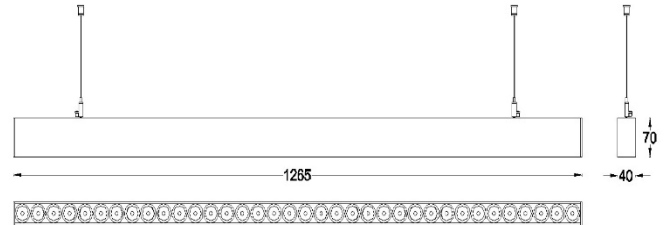

Product Description

LIGNE II cable light, the use of aluminum lamp body, simple and beautiful appearance, anti-glare grille, the use of LED light source, has good heat dissipation, high efficiency and energy saving, can be splicing end to end, can be customized length. Suitable for commercial, office lighting applications.

Product Feature

- Body Material: Aluminum alloy die-casting lamp body, insulated pressure resistant plastic electrical box
- Optical System: Lens + anti-glare grille
- Finish: Electrostatic powder spraying, black (BK), white (WT)
- Projection direction: /
- Accessories/Brackets: /
- Safety certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shading Angle: 38°
- Light source type: SMD LED
- Source Lm: 4000K 3780lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K/5000K/Ra90
- SDCM: 3SDCM
- Input voltage: 220V~240V AC/50Hz
- Dimming: ON-OFF/0-10V control (must be tested with the project site system in advance)
- Net Weight: 2.35Kg without packing

Order Model

Model	Length (mm)	Comment	Power (W)	Driver	Beam	CCT	Finish
OP40	12 1265	S Single Directional	30 30W	E ON-OFF D 0-10V Dimming	2 24°	30 3000K	WT White
					3 36°	40 4000K	
					4 45°	50 5000K	

Example: OP4012S-30E-230WT

Accessories

LIGNE II - MODEL: OP4012S


Linear Luminaires

PROJECT:

WAC

Light position number:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:	OP4012S-30E-330WT
BEAM ANGLE:	/
POWER:	30.6W
LUMENS:	2249.1lm
CBCP:	/
EFFICACY:	73.5lm/W