

LIGNE II - MODEL: OP5512D


Linear Luminaires

WAC


PROJECT:

TYPE:

Product Image

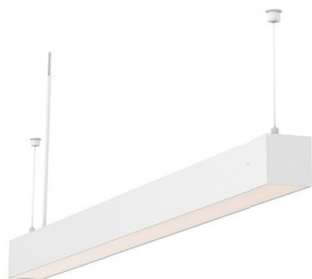

Line Drawing

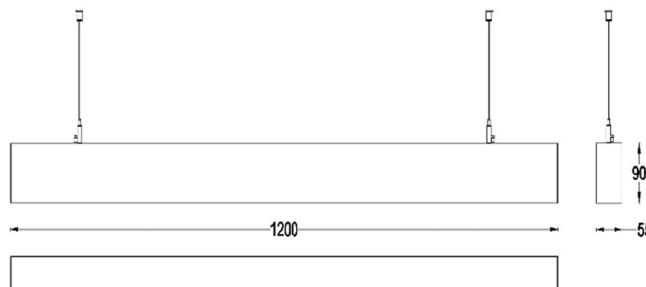

Product Description

LIGNE II pendant lamp, using aluminum profile lamp body, simple and beautiful appearance, up and down light, respectively, controllable, LED light source, with good heat dissipation, high efficiency and energy saving, good anti-glare, can be spliced from end to end, can be customized length. Suitable for lighting applications in commercial, office spaces.

Product Features

- Body Material: Aluminum alloy extruded lamp body
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Blackout corners: /
- LED Type: SMD LED
- Power: 4000K 4580lm
- Source Lm: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K/5000K/Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V control (must be matched with the project site system in advance)
- Net Weight: 3.44Kg without packing

Order Model

Model	Length (mm)	Comment	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
OP55	12 1200	D Double Directional	45 45W	E ON-OFF D 0-10V Dimming	F Frosted	P (PC masks)	30 3000K	WT White
						Y (PC embossing cover)	40 4000K	
							50 5000K	

Example:OP5512D-45E-FP30WT

Note:(upper light: 10W, bottom light: 35W)

Accessory




LIGNE II - MODEL: OP5512D

Linear Luminaires


WAC

PROJECT:

TYPE:

MODEL	SPECIFICATION	PICTURE
OP5512D-L	L-shaped splices	
OP5512D-T	T-splicing	
OP5512D-X	Cross-shaped splicings	

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

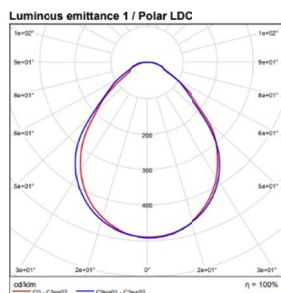

MODEL:	OP5512D-45E-FP30WT
BEANMANGLE:	/
POWER:	46W
LUMENS:	3825 lm
CBCP:	/
EFFICACY:	85 lm/W

LIGNE II - MODEL: OP5512D

Linear Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

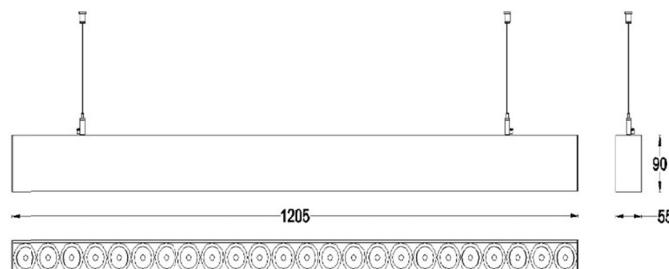

Product Description

LIGNE II pendant lamp, using aluminum profile lamp body, simple and beautiful appearance, up and down light, controllable, anti-glare grille, the use of LED light source, has good heat dissipation, high efficiency and energy saving, can be spliced from end to end, can be customized length. Suitable for lighting applications in commercial, office spaces.

Product Features

- Body Material: Aluminum alloy extruded lamp body
- Optical System: Lens + anti-glare grille
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Blackout corners: 38°
- LED Type: SMD LED
- Source Lm: 4000K 4680lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K/5000K/Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V control (must be matched with the project site system in advance)
- Net Weight: 3.67Kg without packing

订购模型

Model	Length (mm)	Comment	Power (W)	Driver	Beam Up	Beam Down	CCT	Finish
OP55	12 1265	D Double Directional	45 45W	E ON-OFF D 0-10V Dimming	F Frosted	2 24°	30 3000K	WT White
						3 36°	40 4000K	
						4 45°	50 5000K	

Example: OP5512D-45E-FP30WT

Note: (upper light: 10W, bottom light: 35W)

Accessory

LIGNE II - MODEL: OP5512D


Linear Luminaires

WAC

PROJECT:

TYPE:

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

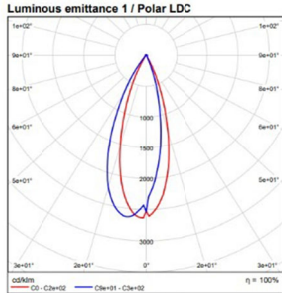

MODEL:	OP5512D-45E-F330WT
BEAMANGLE:	/
POWER:	46.5W
LUMENS:	3417.75 lm
CBCP:	/
EFFICACY:	73.5 lm/W