

# LIGNE II - MODEL: OR4012

## Linear Luminaires

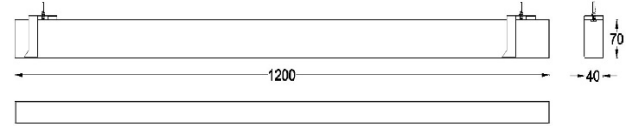
# WAC

PROJECT: TYPE: 

### Product Image



### Line Drawing



### Product Description

LIGNE II embedded linear lamps, using aluminum lamp body, simple and beautiful appearance, use LED light source, has good heat dissipation, high efficiency and energy saving, good anti-glare, can be splicing end to end, can be customized length. Suitable for commercial, office lighting applications.

### Product Features

- Body Material: Aluminum alloy lamp body
- Optical System: Lens optical system
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

### Product Specifications

- Cut-out: 46mm\*1206mm
- Shielding Angle: /
- LED Type: SMD LED
- Source Lm: 4000K 3780lm;
- LED Lifetime: >50000h- L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/  
4000K/  
5000K/  
Ra90 ,
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: On-off / 0-10V
- Net Weight: 2.23Kg without packing

### Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
OR40	12 1200	30 30W	E ON-OFF D 0-10V Dimming	P (PC mask ) Y (PC Embossed cover)	30 3000K 40 4000K 50 5000K	WT White

Example: OR4012-30E-P30WT

# LIGNE II - MODEL: OR4012




Linear Luminaires




PROJECT:

TYPE:

## Accessories

Model	Specification	Picture
OP4012S-L	L-shaped splice	
OP4012S-T	T-splice	
OP4012S-X	Cruciform splice	

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL:	OR4012-30E-P30WT
BEAM ANGLE:	/
POWER:	30.6W
LUMENS:	2601 lm
CBCP:	/
EFFICACY:	85 lm/W

# LIGNE II - MODEL: OR4012

## Linear Luminaires

# WAC

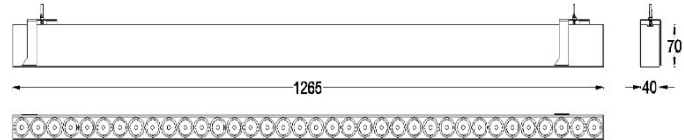
PROJECT:

TYPE:

### Product Image



### Line Drawing



### Product Description

LIGNE II embedded linear lamps, using aluminum lamp body, simple and beautiful appearance, anti-glare grille, use LED light source, has good heat dissipation, high efficiency and energy saving, can be splicing end to end, can be customized length. Suitable for commercial, office lighting applications.

### Product Features

- Body Material: Aluminum alloy lamp body
- Optical System: Lens+ Anti-glare grille
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

### Product Specifications

- Cut-out: 46mm\*1271mm
- Shielding Angle: 38°
- LED Type: SMD LED
- Source Lm: 4000K 3780lm;
- LED Lifetime: >50000h- L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/  
4000K/  
5000K/  
Ra90 ,
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: On-off / 0-10V
- Net Weight: 2.35Kg without packing

### Order Model

Model	Length (mm)	Power (W)	Driver	Beam	CCT	Finish
OR40	12 1265	30 30W	E ON-OFF D 0-10V Dimming	2 24°	30 3000K	WT White
				3 36°	40 4000K	
				4 45°	50 5000K	

Example: OR4012-30E-230WT

# LIGNE II - MODEL: OR4012




Linear Luminaires




PROJECT:

TYPE:

## Accessories

Model	Specification	Picture
OP4012S-L	L-shaped splice	
OP4012S-T	T-splice	
OP4012S-X	Cruciform splice	

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	OR4012-30E-330WT
<b>BEAM ANGLE:</b>	/
<b>POWER:</b>	30.6W
<b>LUMENS:</b>	2249.1 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	73.5 lm/W