

VENTRIX - MODEL: OS2FM
FollowMe Silo Luminaires(48V)

WAC LIGHTING
Responsible Lighting®


PROJECT:

LIGHT POSITION NUMBER:

Product Picture



Line Drawing

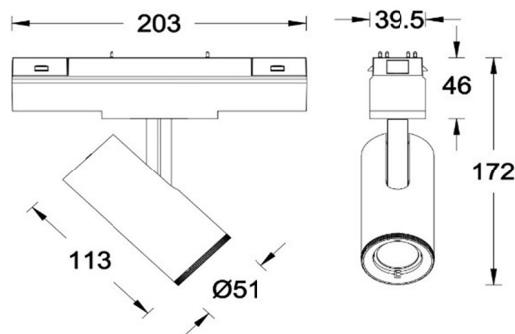

Product Description

VENTRIX series low pressure track luminaire, suitable for WAC VENTRIX track system, luminaire smart, small; Electric flexible adjustment of irradiation Angle, accurate light control; The beam Angle can be adjusted to meet the needs of different application environments, and is widely used in office, commercial and other lighting Spaces.

Product Features

- Body Material: Aluminum alloy lamp body
- Optical System: Lens
- Finish: Static electricity powder coating
- Projection direction: Horizontal 0°~360° adjustment; Vertical 0~90° regulation (electric regulation)
- Accessories/Brackets: See the attachment
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

Product Specifications

- Shading Angle: /
- LED Type: COB
- Lamp Flux: 4000K 1000lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CRI: 2700K/3000K/3500K/4000K,Ra90
- SDCM: 3 SDCM
- Input: 220V DC
- Dimming: ON-OFF/0-10V/ELV/DMX512/Wireless and APP control
- Net Weight: 0.89Kg without packing

Order Model

Model	Power(W)	Beam	CCT	CRI	Max Lumens	Max CBCP	Finish
OS2FM	1 22W	15°-50°	927 2700K	90	1335	21430	BK Black WT White
			930 3000K				
			935 3500K				
			940 4000K				

Example: OS2FM-1-927BK

PROJECT:

LIGHT POSITION NUMBER:

Accessories

Model	Description	Pic
LENS-16-HCM	Honeycomb Louver	
LENS-16P-CRL-WT LENS-16P-CRL-BK	Cross Louver	
LENS-16-SNOOT-BK LENS-16-SNOOT-WT	Snoot	
LENS-16-RED LENS-16-GRN LENS-16-BLU LENS-16-AMB	Colored Lens	
LENS-16-FR	Clear/Frosted Lens	
LENS-16-SPR	Spread Lens	
LENS-16-BEL	Beam Elongating Lens	