

# VENTRIX - MODEL: OS2D



## Direct Luminaires (48V)


PROJECT:

TYPE:

### Product Image



### Line Drawing

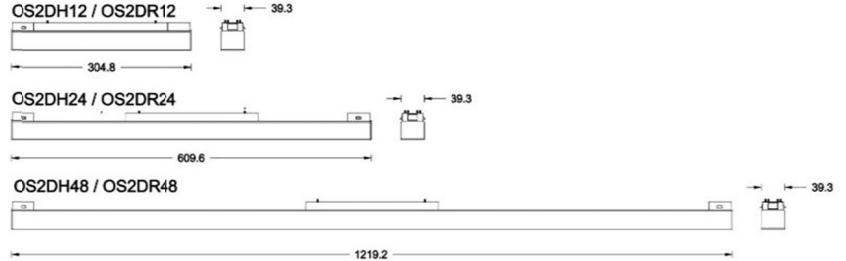

### Product Description

VENTRIX series low-voltage linear lighting fixtures, suitable for WAC VENTRIX track system, with flexible and compact lighting fixtures; Excellent light output, splicing without dark areas, with deep anti glare options to choose from; Meeting the needs of different application environments, widely used in lighting spaces such as offices and commercial areas.

### Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens
- Finish: Electrostatic powder coating,
- Adjustable Angle: See attachment
- Accessories: /
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

### Product Specifications

- Light blocking angle: /
- Light source type: SMD
- Source Lm: Refer to the table
- LED Lifetime: >50000h-L70/B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K; Ra90
- SDCM: 3 SDCM
- Input: 48VDC
- Dimming control: ON-OFF/0-10V/ELV/DMX512/Wireless and mobile app control system
- Net Weight: Approximately 0.39Kg (7W-14.5W), 0.78Kg/(12.5W-27W), 1.58Kg/(24.5W-53W), without packaging

### Order Model

Model	Power(W)	Max Lumens	CCT	CRI	Finish
OS2DH12	1 7W	470	F927 2700K F930 3000K F935 3500K F940 4000K	90	BK Black
	2 10W	670			
	3 14.5W	910			
OS2DH24	1 12.5W	970			
	2 18.5W	1370			
	3 27W	1850			
OS2DH48	1 24.5W	1940			
	2 37W	2740			
	3 53W	3690			

**VENTRIX - MODEL: OS2D**  
 Direct Luminaires (48V)



PROJECT:

TYPE:

Example: OS2DH12-1-F927BK

Model	Power(W)	Max Lumens	CCT	CRI	Finish
<b>OS2DR12</b>	1 7W	350	<b>F927</b> 2700K <b>F930</b> 3000K <b>F935</b> 3500K <b>F940</b> 4000K	90	<b>BK</b> Black
	2 10W	500			
	3 14.5W	690			
<b>OS2DR24</b>	1 12.5W	740			
	2 18.5W	1050			
	3 27W	1410			
<b>OS2DR48</b>	1 24.5W	1470			
	2 37W	2090			
	3 53W	2810			

Example: OS2DH12-1-F927BK

**Accessory**