

VENTRIX - MODEL: OS2MD

Multi Stealth Downlight Luminaires (48V)




PROJECT

TYPE

Product Image



Line Drawing

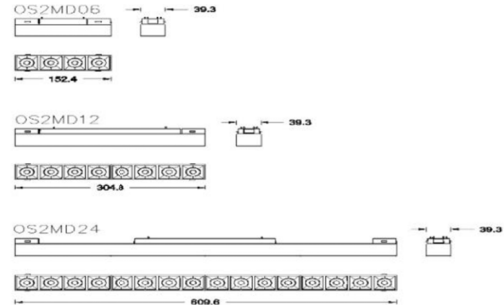

Product Description

VENTRIX series low-voltage linear lighting fixtures, suitable for WAC VENTRIX track system, with flexible and compact lighting fixtures; Adopting WAC's leading SUBROSA hidden light technology with a built-in 40 ° cut-off angle, achieving the ultimate Anti glare effect; Meeting the needs of different application environments, widely used in lighting spaces such as offices and commercial areas.

Product Features

- **Body Material:** Aluminum alloy lamp body
- **Optical System:** Lens
- **Finish:** Static electricity powder coating
- **Adjustable Angle:** /
- **Accessories:** See Attachment
- **Certification:** CQC
- **IP Rating:** IP20
- **Insulation Level:** Class III
- **Operating Temperature:** -20°C~40°C

Product Specifications

- **Shielding angle:** 40°
- **LED Type:** SMD
- **Source Lm:** See Attachment
- **LED Lifetime:** >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K / 3000K / 3500K / 4000K; Ra90
- **SDCM:** 3 SDCM
- **Input:** 48VDC
- **Dimming:** ON-OFF/0-10V/ELV/DMX512/Wireless and mobile app control
- **Net Weight:** 0.22Kg(3.5W-6W), 0.39Kg(5.5W-10.5W), 0.67Kg(10W-21.5W), without packing

Order Model

Model	Power (W)	Max Lumens	Max CBCP	Beam	CCT	CRI	Finish
OS2MD06	1 3.5W	380	1820	S 16° N 32° F 45°	927 2700K	90	BK Black
	2 5W	450	2570		930 3000K		CH Chrome
	3 6W	560	2900		935 3500K		GL Gold
					940 4000K		HZ Haze
OS2MD12	1 5.5W	730	3970	S 16° N 32° F 45°	927 2700K	90	BK Black
	2 8W	960	4870		930 3000K		CH Chrome
	3 10.5W	1080	5490		935 3500K		GL Gold
					940 4000K		HZ Haze
OS2MD24	1 10W	1470	6600	S 16° N 32° F 45°	927 2700K	90	BK Black
	2 15.5W	1840	8830		930 3000K		CH Chrome
	3 21.5W	2190	9940		935 3500K		GL Gold
					940 4000K		HZ Haze

VENTRIX - MODEL: OS2MD

Multi Stealth Downlight Luminaires (48V)

WAC

PROJECT

TYPE:

Example: **OS2MD06-1-S927BK**

Accessory
