

# NEON - MODEL: FLSH

## Linear Luminaires


# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

### Product Image



### Line Drawing

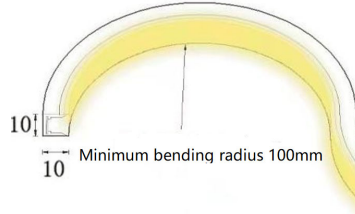

### Product Description

10 \* 10 positive curved neon light strip, available in monochrome and RGBW versions, adopts a special process of integrated extrusion to ensure continuous and uniform light output, without light spots. The integrated end is injection molded and supports seamless splicing without dark areas. It has two specifications, IP65 and IP67, and is widely used for indoor and outdoor contour hooking and shape creation

### Product Features

Body Material: Lamp body extrusion silicone, high quality FPCB lamp board

- Optical System: Silicone microstructure
- Accessories: Installation accessories can be ordered separately
- Certification: CQC
- IP Rating: IP65(Bare wires at both ends)  
IP67(Waterproof joints at both ends)
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

### Ordering model

Model	LED	Length	Size	Dimming	CCT	Power Feed Type	IP	Finish
<b>FLSH</b>	<b>06</b> 6W/m	<b>10</b> 1m	<b>A</b>	<b>E</b> ON-OFF	<b>27</b> 2700K	<b>S</b> Side outlet	<b>5</b> IP65	<b>WT</b>
H-series	<b>10</b> 10W/m	<b>20</b> 2m	10*10mm	(Whole	<b>30</b> 3000K	<b>B</b> Bottom outlet	<b>7</b> IP67	White
positive		<b>30</b> 3m		segment	<b>35</b> 3500K	<b>F</b> Front outlet		
curved		<b>40</b> 4m		control)	<b>40</b> 4000K			
neon light		<b>50</b> 5m			<b>50</b> 5000K			
strip								

Example: FLSH-0610A-E30S5WT

Note: The length can be provided in units of 0.1 meters, for example: FLSH-0615A-E30S5WT ("15" represents 1.5 meters)

### Accessories

Model	Description	Picture
FLSH-A-AC	H-series 10 * 10mm special card *Default 1M comes with 3pcs of cards	
FLSH-A-CH	H-series 10 * 10mm dedicated fixed track with a length of 965mm *Optional, needs to be ordered separately	

### WAC Lighting

[www.waclighting.com](http://www.waclighting.com) (US)

[www.waclighting.com.cn](http://www.waclighting.com.cn) (China)

### Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

### WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-03-08

# NEON - MODEL: FLSH

## Linear Luminaires

# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

Product Image



Line Drawing

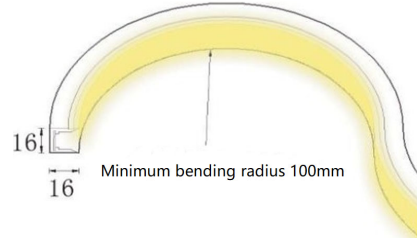

### Product Description

16 \* 16 positive curved neon light strip, available in monochrome and RGBW versions, adopts a special process of integrated extrusion to ensure continuous and uniform light output, without light spots. The integrated end is injection molded and supports seamless splicing without dark areas. It has two specifications, IP65 and IP67, and is widely used for indoor and outdoor contour hooking and shape creation.

### Product Features

- Body Material: Lamp body extrusion silicone, high quality FPCB lamp board
- Optical System: Silicone microstructure
- Accessories: Installation accessories can be ordered separately
- Certification: CQC
- IP Rating: IP65(Bare wires at both ends)  
IP67(Waterproof joints at both ends)
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

### Product specifications

- LED Type: SMD
- LED Power: 1610lm@14W/m,2070lm@18W/m
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K,3000K,3500K,4000K,5000K/Ra90  
RGBW(W:2700K,3000K,4000K,5000K)
- Input: 24V DC
- SDCM: 3 SDCM
- minimum bend radius: 100mm
- Dimming: ON-OFF (whole section control)/DMX512 1m 8-section
- Net Weight: 0.6Kg/m without packing

### Ordering model

Model	LED	Length	Size	Dimming	CCT	Power Feed Type	IP	Finish
<b>FLSH</b>	<b>14</b> 14W/m	<b>10</b> 1m	<b>B</b>	<b>E</b> ON-OFF	<b>27</b> 2700K	<b>S</b> Side outlet	<b>5</b> IP65	<b>WT</b>
H-series positive bending Neon light strip	<b>18</b> 18W/m	<b>20</b> 2m	16*16mm	(Whole segment control)	<b>30</b> 3000K	<b>B</b> Bottom outlet	<b>7</b> IP67	White
		<b>30</b> 3m		<b>M</b> DMX512	<b>35</b> 3500K	<b>F</b> Front outlet		
		<b>40</b> 4m		1 meter and 8 sections	<b>40</b> 4000K			
		<b>50</b> 5m			<b>50</b> 5000K			
					<b>F2</b> RGBW (2700K)			
					<b>F3</b> RGBW (3000K)			
					<b>F4</b> RGBW (4000K)			
					<b>F5</b> RGBW (5000K)			

Example: FLSH-1410B-E30S5WT

Note: The length can be provided in units of 0.1 meters, for example: FLSV-1415B-E30S5WT ("15" represents 1.5 meters)

### WAC Lighting

[www.waclighting.com](http://www.waclighting.com) (US)

[www.waclighting.com.cn](http://www.waclighting.com.cn) (China)

### Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

### WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-03-08

# NEON - MODEL: FLSH

## Linear Luminaires



# WAC LIGHTING

Responsible Lighting®

PROJECT:

TYPE:

### Accessories

Model	Description	Picture
FLSH-B-AC	H series 16mm special card *Default 1M comes with 3pcs of cards	
FLSH-B-CH	H series 16mm special fixed track length 965mm * Optional, need to order separately	

#### WAC Lighting

[www.waclighting.com](http://www.waclighting.com) (US)

[www.waclighting.com.cn](http://www.waclighting.com.cn) (China)

#### Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

#### WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

*WAC Lighting reserves the right to periodically design and update products.2024-03-08*