

UNIVERSAL LAMP PANEL - MODLE:OGC20505


Panel Luminaries

WAC


PROJECT:

TYPE:

Product Image

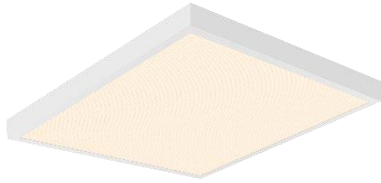

Line Drawing

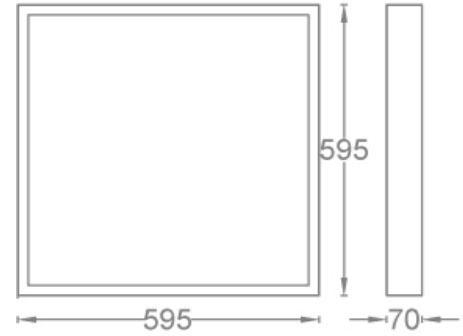

Product Description

WAC universal lamp panel, using aluminum profile lamp body, has a simple and beautiful appearance, and has good heat dissipation performance Using anti glare prism optics, no visible glare, UGR less than 19, with good anti glare performance and light uniformity. Using LED light source color consistency control, Ra90, no flicker, high light efficiency and energy saving. It has a comfortable lighting effect and is suitable for lighting applications in commercial, office, classroom, and other places.

Product Features

- Body Material: Aluminum alloy extruded body
- Optical System: Lens+ Prism plate
- Finish: Static electricity powder coating
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP40
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: /
- LED Type: SMD LED
- Source Lm: 3000K :36W 4680 lm;40W 5200 lm.
4000K :36W 4860 lm;40W 5400 lm.
5000K :36W 4860 lm;40W 5400 lm.
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K/5000K/Ra90
- SDCM: 5 SDCM
- Input: 220V ~240V AC /50Hz
- Dimming: ON-OFF/0-10V control (must be matched and tested with the project site system in advance).
- Net Weight: 2.6Kg without packing

Order Model

Model	Size (mm)	Power	Driver	Beam Down	CCT	Finish
OGC2	0505 595*595mm	36W 36W	E ON-OFF		30 3000K	WT White
		40W 40W	D 0-10V Dimming	Y (Prism plate)	40 4000K	
					50 5000K	

Example: OGC20505-36E-Y40WT

UNIVERSAL LAMP PANEL - MODLE:OGC20505

Panel Luminaries


WAC

PROJECT:


TYPE:

Accessory

LIGHT DISTRIBUTION@4000K LUMINAIRE DATA

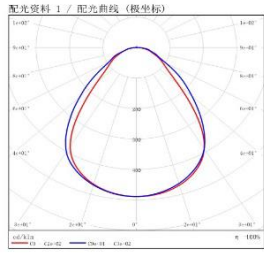

MODEL:	OGC20505-36E-Y40WT
BEAM ANGLE:	/
POWER:	38.79W
LUMENS:	4163.7 lm
CBCP:	/
EFFICACY:	107.34 lm/W



MODEL:	OGC20505-40E-Y40WT
BEAM ANGLE:	/
POWER:	43.06W
LUMENS:	4538.2 lm
CBCP:	/
EFFICACY:	105.4 lm/W