

Universal lamp panel - MODEL: OGR10303




Panel Luminaires


PROJECT:

TYPE:

Product Image

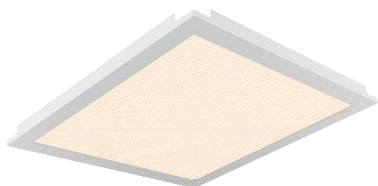

Line Drawing



Product Description

WAC universal lamp panel, using aluminum lamp body, simple and beautiful appearance, with good heat dissipation performance. Using anti-glare prism optics, no glare, UGR less than 19, with good anti-glare performance and light uniformity. Use LED light source color consistency control, Ra90, no stroboscopic, high light efficiency and energy saving. With a comfortable light effect, suitable for commercial, office, classroom and other places of lighting applications.

Product Description

- Body Material: Aluminum alloy die-casting
- Optical System: Lens + prism plate
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP40
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: /
- LED Type: SMD LED
- Source Lm: 3000K:12W 1560lm;18W 2340lm
4000K:12W 1620lm;18W 2430lm
5000K:12W 1620lm;18W 2430lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K/5000K/Ra90
- SDCM: 5 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V
- Net Weight: 0.9Kg without packing

Order Model

Model	Size (mm)	Power (W)	Driver	Beam Down	CCT	Finish
OGR1	0303 300*300mm	12 12W 18 18W	E ON-OFF D 0-10V Dimming	Y (prism plate)	30 3000K 40 4000K 50 5000K	WT White

Example: OGR10303-18E-Y40WT

Accessories

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

Universal lamp panel - MODEL: OGR10303


Panel Luminaires

WAC

PROJECT:

TYPE:

LIGHT DISTRIBUTION@4000K LUMINAIRE DATA



MODEL:	<u>OGR10303-18E-Y40WT</u>
BEAM ANGLE:	<u>/</u>
POWER:	<u>20.51W</u>
LUMENS:	<u>1684.9 lm</u>
CBCP:	<u>/</u>
EFFICACY:	<u>82.14 lm/W</u>