

Universal lamp panel- MODEL: OGR10312

Panel Luminaires


WAC

PROJECT:

TYPE:

Product Image

Line Drawing

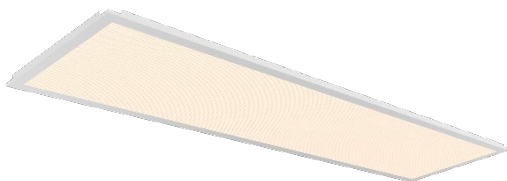

Product Description

WAC universal lamp panel, using aluminum lamp body, simple and beautiful appearance, with good heat dissipation performance. Using anti-glare prism optics, no glare, UGR less than 19, with good anti-glare performance and light uniformity. Use LED light source color consistency control, Ra90, no stroboscopic, high light efficiency and energy saving. With a comfortable light effect, suitable for commercial, office, classroom and other places of lighting applications

Product Features

- Body Material: Aluminum alloy extrusion lamp body
- Optical System: Lens + prism plate
- Finish: Static electricity powder coating
- Direction of projection: /
- Accessories/Brackets: /
- Certification: CCC
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: /
- LED Type: SMD LED
- Source Lm: 3000K:36W 4680lm;40W 5200lm;48W 6240lm
4000K:36W 4860lm;40W 5400lm;48W 6480lm
5000K:36W 4860lm;40W 5400lm;48W 6480lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/ 4000K/5000K/Ra90
- SDCM: 5 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0-10V control (must be advanced with the project site system Do a match test)
- Net Weight: About 2.28Kg/m, without packaging

Order Model

Model	Size (mm)	Power (W)	Driver	Beam Down	CCT	Finish
OGR1	0312 300*1200mm	36 36W	E ON-OFF	Y (棱镜板)	30 3000K	WT White
		40 40W	D 0-10V Dimming		40 4000K	
		48 48W			50 5000K	

Example: OGR10312-36E-Y40WT

Universal lamp panel- MODEL: OGR10312

Panel Luminaires

WAC


PROJECT:

TYPE:


Attachment

/


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL: OGR10312-Y40WT
BEAM ANGLE: /
POWER: 37.99W
LUMENS: 4451.2 lm
CBCP: /
EFFICACY: 117.16 lm/W



MODEL: OGR10312-40E-Y40WT
BEAM ANGLE: /
POWER: 42.9W
LUMENS: 4830.6 lm
CBCP: /
EFFICACY: 112.52 lm/W



MODEL: OGR10312-48E-Y40WT
BEAM ANGLE: /
POWER: 49.52W
LUMENS: 5481.1 lm
CBCP: /
EFFICACY: 110.67 lm/W