

## Product model:


This installation instruction applies to LED outdoor strip-light ELD3\* series, where "\*" contains different power, different control system, different light Angle, different color temperature, different appearance color information.

## Installation Precautions:


1. Please read through the Instructions before installation.
2. The product should be installed by a professional electrician.
3. Make sure the power supply is cut off before installation and maintenance, to avoid the risk of electric shock.
4. Before installing the light, ensure that the mounting surface is firm and reliable to prevent the light from falling.
5. Please keep this Instruction properly for future reference.

## Installation method and procedure:

1. Refer to Figure 1 to take out the light.
2. First fix the steel cable on the corresponding position of the curtain wall, and then fix the aluminum extrusion bracket on the curtain wall with self-tapping screws as shown in Figure 2 (the construction party provides self-tapping screws).

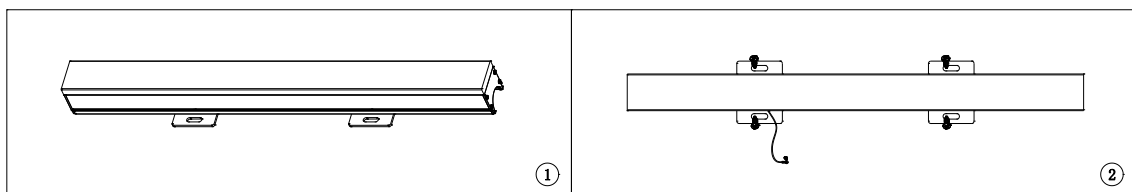

3. To install the adjacent light strip, first locate the corresponding position, then fix the aluminum extrusion bracket, and finally wire and fix the light. Please distinguish the input end and output end of the light power cord, and connect the cables according to the label content on the wire, as shown in Figure 3.

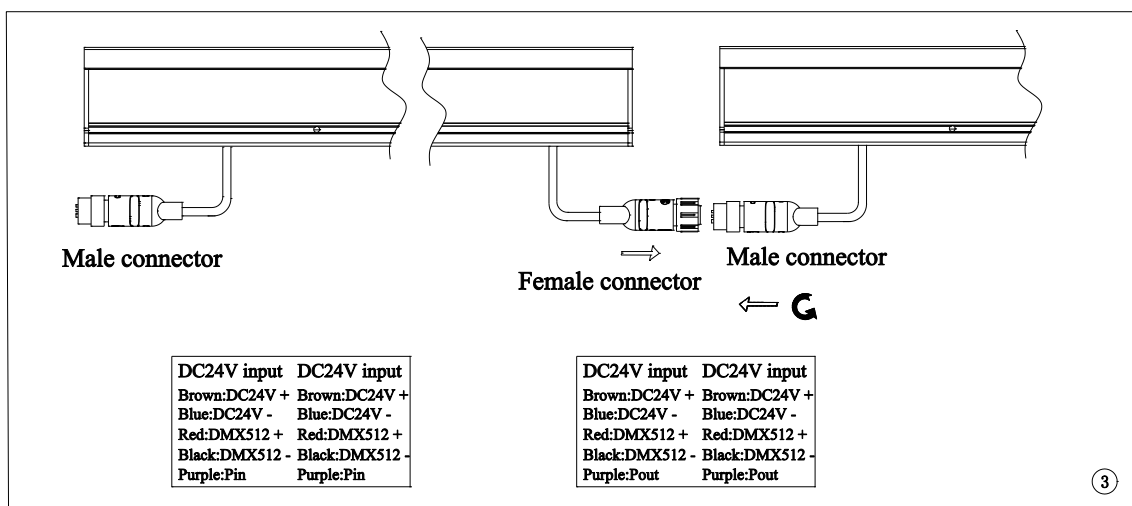

Note: 1. It is recommended that the total length of the splicing of each power circuit light does not exceed 8 meters, and it is appropriate that each DMX signal amplifier is equipped with no more than 26 lights. If there is interference, please increase the signal amplifier according to the site installation.

2. DMX512 dimming needs to be debugged by professionals.