

# RUYI - MODEL: EDM1

## Mark Light Luminaires

# WAC


PROJECT:

TYPE:

### Product Image



### Line Drawing

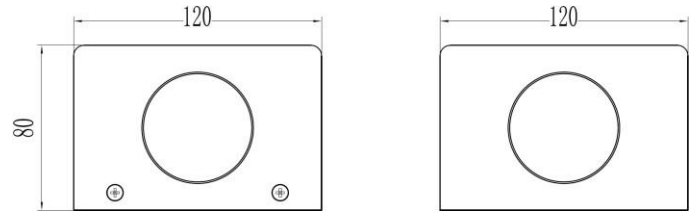

### Product Description

LED cross lamp, aluminum die casting, high temperature powder coating, compact size and highly recognizable appearance design, suitable for outdoor environment, IP65 protection class. With sheet metal fasteners, easy to install. The luminaire is reliably fixed on the mounting surface. High transmittance lens, applied to building facades, etc.

### Product Description

- Body Material: Aluminum alloy die-casting
- Optical System: Lens
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: Fixed sheet metal mounting bracket
- Certification: CQC
- IP Rating: IP65
- Insulation Level: Class I
- Operating Temperature: -20°C~50°C

### Product Specifications

- LED Type: HIGH POWER
- Source Power: 24W Max
- Source Lm: 2700K 2360lm /3000K 2416lm /4000K 2687lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 4000K , Ra80; RGBW
- SDCM: 3 SDCM WHITE, 5 SDCM RGBW
- Input: 220V AC
- Dimming: ON-OFF / DMX512
- Net Weight: 1.8Kg without packing

### Order Model

Model	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EDM1	24 24W(Max)	4	1942	EL ON-OFF 220V AC Power Supply ML DMX512 220V AC Power Supply	1 10°	27 2700K 30 3000K 40 4000K	BK Black

Example: EDM1-24EL-127BK

# RUYI - MODEL: EDM1

## Mark Light Luminaires



PROJECT:


TYPE:

Model	Power (W)	LEDs (quantity)	Max Lumens (lm)	Control Systems	Beam	CCT	Finish
EDM1	24 24W(Max)	4	920	ML DMX512 220V AC Power Supply	1 10°	F3 RGBW W=3000K F4 RGBW W=4000K F6 RGBW W=5700K	BK Black

Example: EDM1-24ML-1F3BK

### Accessories

### LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	EDM1-24ML-130BK
<b>BEAM ANGLE:</b>	10°
<b>POWER:</b>	26.2W
<b>LUMENS:</b>	1942 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	74.1lm/W