

# MERE - MODEL: TL35SLM

## W Track Luminaires

# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

Product Image



Line Drawing

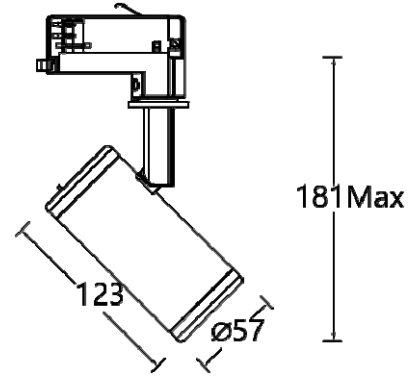

### Product Description

The MERE series LED track spotlights adopt a modular design that is suitable for the W track system. The exterior design is exquisite and there is no visible heat sink. The lamp body is made of die cast aluminum and uses COB luminous modules, which can provide rich beam angle configurations. More importantly, different beam angle accessories can be replaced by hand on site, which can be used for key lighting or environmental lighting. The lighting fixtures are equipped with flicker free driving appliances and can also replace different dimming modules on site. They are widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

### Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Reflector
- Finish: Static electricity powder coating, BK/WT
- Adjustable Angle: Horizontal 0~365°, Vertical 0-90°
- Accessories: Refer to the accessories list, each type of accessories can only be added one
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 0.6Kg without packing

### Product Specifications

- LED Type: COB
- LED power: 10W
- Source Lm: 2700K: 1000lm (10W)      3000K: 1050lm (10W)  
3500K: 1080lm (10W)      4000K: 1100lm (10W)
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K, Ra90 / Ra97(>Ra95)
- SDCM: 2 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: On-off+0-10V /DALI (A match test is required)

### Ordering model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL35S MERE	LM10 COB 10W	D 0-10V+ On-board A DALI	1 12°	9 90 A 97	27 2700K 30 3000K 35 3500K 40 4000K	WT White BK Black
			2 24°			
			3 36°			
			5 50°			
			W Wash			
F 15°- 50°						
TL35S	LM10	D	2	9	30	WT

Example: TL35SLM10-D-2930WT

# MERE- MODEL: TL35SLM

## W Track Luminaires



PROJECT:


TYPE:

### Accessories

First class fittings	lens "angle 1" <b>LENS-TL35-C1BK</b>	Lens "Angle 2" <b>LENS-TL35-C2BK</b>	Lens "Angle 3" <b>LENS-TL35-C3BK</b>	Lens "Angle 5" <b>LENS-TL35-C5BK</b>	Lens "Angle F" <b>LENS-TL35-CFBK</b>
Second class fittings	Flat lens "wall washing" <b>LENS-TL35-WWWT</b>	Flat lens "stretching" <b>LENS-TL35-EEWT</b>	Flat lens "Weak mixed light" <b>LENS-TL35-SSWT</b>	Flat lens "Medium mixed light" <b>LENS-TL35-MMWT</b>	Flat lens "Strong mixed light" <b>LENS-TL35-LLWT</b>
Third class fittings	Filters "nostalgia" <b>LENS-TL35-HSWT</b>	Filters "identifiability" <b>LENS-TL35-RGWT</b>	Filters "preference" <b>LENS-TL35-PFWT</b>		
Fourth class fittings	Rimmed honeycomb <b>LENS-TL35-HCM</b>	All black condenser <b>LENS-TL35-SNOOT-B</b>	White outside and black inside condenser <b>LENS-TL35-SNOOT-W</b>		
Fifth class fittings	Black four-leaf shade <b>LENS-TL35-BD-BK</b>	White four-leaf shade <b>LENS-TL35-BD-WT</b>			
Sixth class fittings	On-board &0~10V Dimmer module (black) <b>PART-TL35-D-BK</b>	On-board &0~10V Dimming module (white) <b>PART-TL35-D-WT</b>	DALI Dimmer module (Black)    DALI Dimmer Module (White) <b>PART-TL35-A-BK</b> <b>PART-TL35-A-WT</b>		

Note: Up to six types of accessories can be installed, and each type of accessories can be installed at most one at the same time

### Track connection diagram

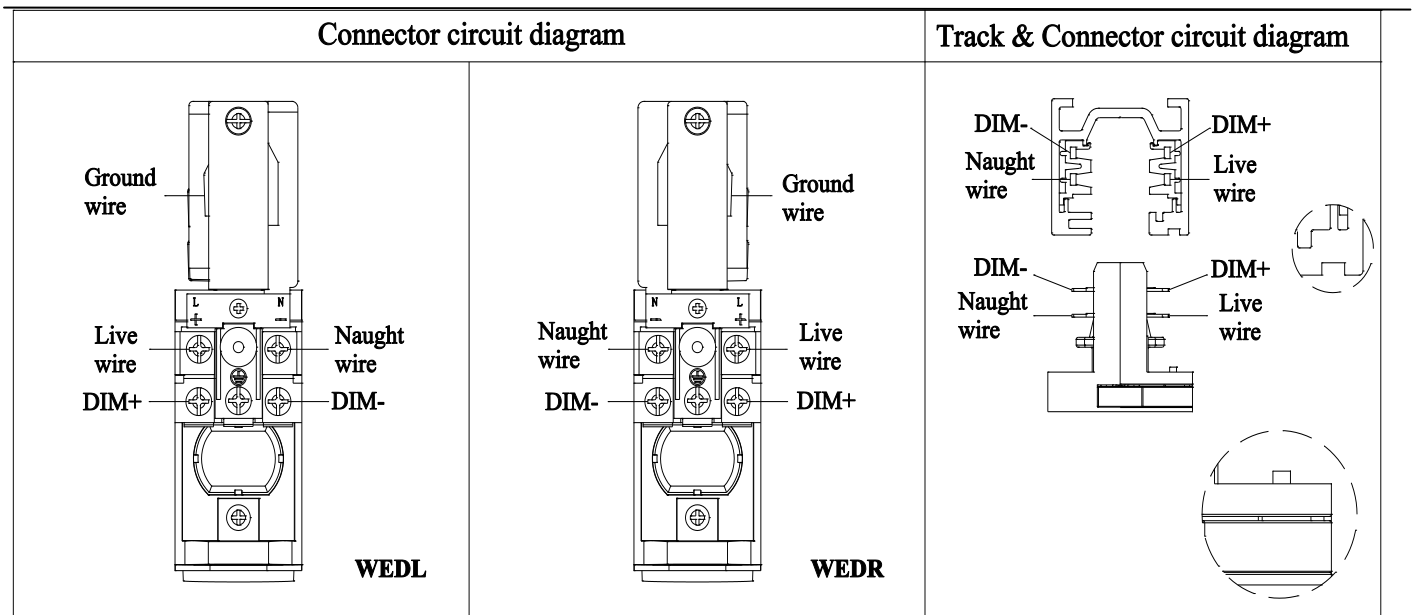

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn

(China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road, Shanghai 201204,China

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

# MERE - MODEL: TL36SLM

## W Track Luminaires

# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

### Product Image



### Line Drawing

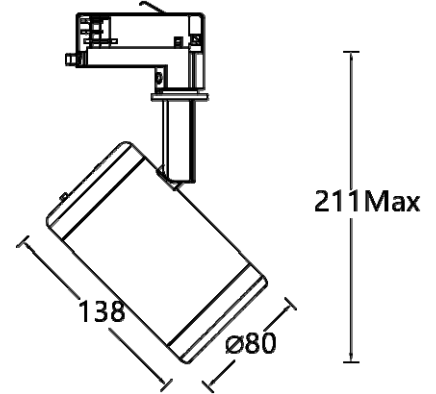

### Product Description

The MERE series LED track spotlights adopt a modular design that is suitable for the W track system. The exterior design is exquisite and there is no visible heat sink. The lamp body is made of die cast aluminum and uses COB luminous modules, which can provide rich beam angle configurations. More importantly, different beam angle accessories can be replaced by hand on site, which can be used for key lighting or environmental lighting. The lighting fixtures are equipped with flicker free driving appliances and can also replace different dimming modules on site. They are widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

### Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Reflector
- Finish: Static electricity powder coating, BK/WT
- Adjustable Angle: Horizontal 0~365°, Vertical 0-90°
- Accessories: Refer to the accessories list, each type of accessories can only be added one
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 0.9Kg without packing

### Product Specifications

- LED Type: COB
- LED power: 12W/18W, built-in power shift
- Source Lm: 2700K: 1360lm (12W) / 2030lm (18W)  
3000K: 1420lm (12W) / 2120lm (18W)  
3500K: 1490lm (12W) / 2230lm (18W)  
4000K: 1560lm (12W) / 2330lm (18W)
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K, Ra90 或 Ra97(>Ra95)
- SDCM: 2 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: On-off+0-10V /DALI (A match test is required)

### Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL36S MERE	LM12 COB 12W LM18 COB 18W	D 0-10V+ On-board A DALI	1 12°	9 90 A 97	27 2700K 30 3000K 35 3500K 40 4000K	WT White BK Black
			2 24°			
			3 36°			
			5 50°			
			W Wash			
			F 15°- 50°			
TL36S	LM18	D	2	9	30	WT

Example: TL36SLM18-D-2930WT

# MERE- MODEL: TL36SLM

## W Track Luminaires



PROJECT:


TYPE:

### Accessories

First class fittings	lens "angle 1" <b>LENS-TL36-C1BK</b>	Lens "Angle 2" <b>LENS-TL36-C2BK</b>	Lens "Angle 3" <b>LENS-TL36-C3BK</b>	Lens "Angle 5" <b>LENS-TL36-C5BK</b>	Lens "Angle F" <b>LENS-TL36-CFBK</b>
Second class fittings	Flat lens "wall washing" <b>LENS-TL36-WWWT</b>	Flat lens "stretching" <b>LENS-TL36-EEWT</b>	Flat lens "Weak mixed light" <b>LENS-TL36-SSWT</b>	Flat lens "Medium mixed light" <b>LENS-TL36-MMWT</b>	Flat lens "Strong mixed light" <b>LENS-TL36-LLWT</b>
Third class fittings	Filters "nostalgia" <b>LENS-TL36-HSWT</b>	Filters "identifiability" <b>LENS-TL36-RGWT</b>	Filters "preference" <b>LENS-TL36-PFWT</b>		
Fourth class fittings	Rimmed honeycomb <b>LENS-TL36-HCM</b>	All black condenser <b>LENS-TL36-SNOOT-B</b>	White outside and black inside condenser <b>LENS-TL36-SNOOT-W</b>		
Fifth class fittings	Black four-leaf shade <b>LENS-TL36-BD-BK</b>	White four-leaf shade <b>LENS-TL36-BD-WT</b>			
Sixth class fittings	On-board &0~10V Dimmer module (black) <b>PART-TL36-D-BK</b>	On-board &0~10V Dimming module (white) <b>PART-TL36-D-WT</b>	DALI Dimmer module (Black)      DALI Dimmer Module (White) <b>PART-TL36-A-BK</b> <b>PART-TL36-A-WT</b>		

Note: Up to six types of accessories can be installed, and each type of accessories can be installed at most one at the same time

### Track connection diagram

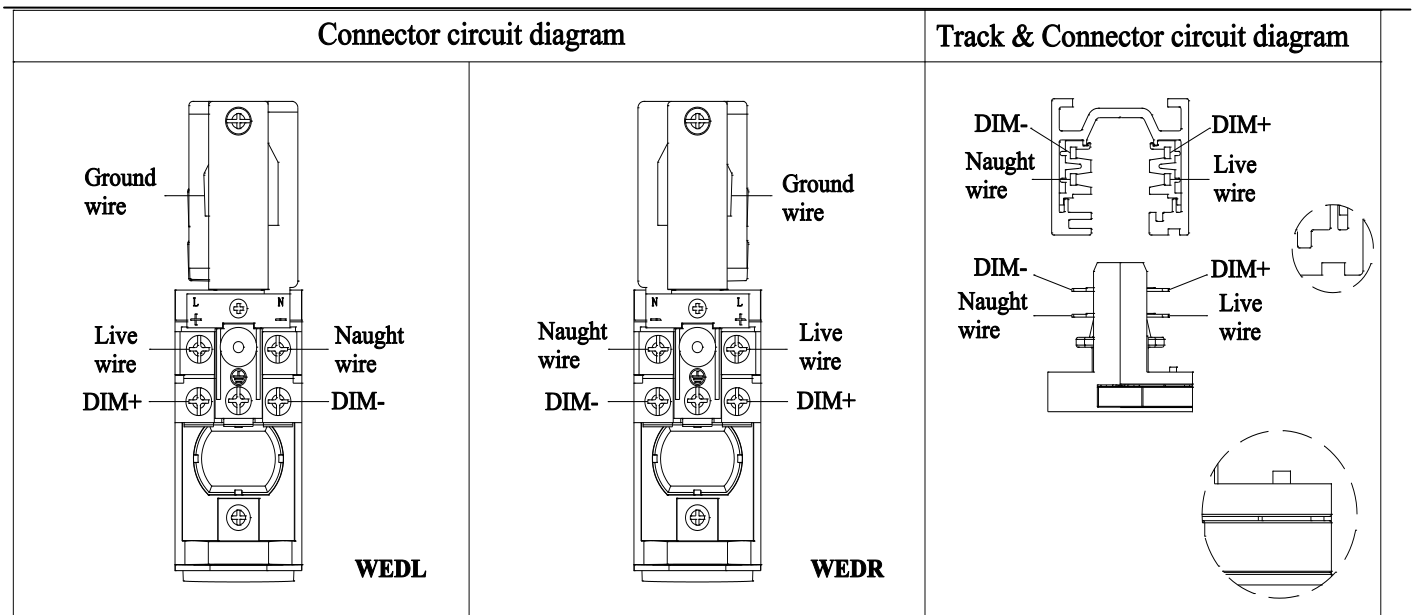

WAC Lighting  
[www.waclighting.com](http://www.waclighting.com) (US)  
[www.waclighting.com.cn](http://www.waclighting.com.cn)  
 (China)

Headquarters  
 44 Harbor Park Drive • Port Washington, NY  
 Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)  
 14,Lane 299, Bi Sheng Road, Shanghai 201204,China  
 Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

# MERE - MODEL: TL37SLM

## W Track Luminaires

# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

**Product Image**



**Line Drawing**

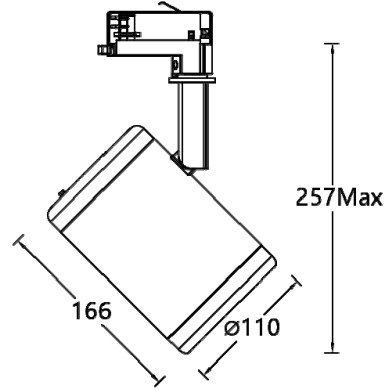

### Product Description

The MERE series LED track spotlights adopt a modular design that is suitable for the W track system. The exterior design is exquisite and there is no visible heat sink. The lamp body is made of die cast aluminum and uses COB luminous modules, which can provide rich beam angle configurations. More importantly, different beam angle accessories can be replaced by hand on site, which can be used for key lighting or environmental lighting. The lighting fixtures are equipped with flicker free driving appliances and can also replace different dimming modules on site. They are widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

### Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Reflector
- Finish: Static electricity powder coating, BK/WT
- Adjustable Angle: Horizontal 0~365°, Vertical 0-90°
- Accessories: Refer to the accessories list, each type of accessories can only be added one
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.8Kg without packing

### Product Specifications

- LED Type: COB
- LED power: 18W/26W/32W/38W, built-in power shift
- Source Lm: 2700K: 2800lm (26W) / 3300lm (32W) / 3800lm (38W)  
3000K: 2950lm (26W) / 3350lm (32W) / 3850lm (38W)  
3500K: 3000lm (26W) / 3400lm (32W) / 3900lm (38W)  
4000K: 3050lm (26W) / 3450lm (32W) / 3950lm (38W)
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K, Ra90 / Ra97(>Ra95)
- SDCM: 2 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: On-off+0-10V /DALI (A match test is required)

### Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL37S MERE	LM18 COB 18W	D 0-10V+ On-board A DALI	1 12°	9 90 A 97	27 2700K	WT White BK Black
	LM26 COB 26W		2 24°		30 3000K	
	LM32 COB 32W		3 36°		35 3500K	
	LM38 COB 38W		5 50°		40 4000K	
			W Wash F 15°- 50°			
TL37S	LM32	D	2	9	30	WT

Example: TL37SLM32-D-2930WT

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.com.cn (China)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)  
14,Lane 299, Bi Sheng Road,Shanghai 201204  
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-01-25

**MERE-** MODEL: TL37SLM


















W Track Luminaires

**WAC**

PROJECT:


TYPE:

**Accessories**

First class fittings	lens "angle 1" <b>LENS-TL37-C1BK</b> 	Lens "Angle 2" <b>LENS-TL37-C2BK</b> 	Lens "Angle 3" <b>LENS-TL37-C3BK</b> 	Lens "Angle 5" <b>LENS-TL37-C5BK</b> 	Lens "Angle F" <b>LENS-TL37-CFBK</b> 
Second class fittings	Flat lens "wall washing" <b>LENS-TL37-WWWT</b> 	Flat lens "stretching" <b>LENS-TL37-EEWT</b> 	Flat lens "Weak mixed light" <b>LENS-TL37-SSWT</b> 	Flat lens "Medium mixed light" <b>LENS-TL37-MMWT</b> 	Flat lens "Strong mixed light" <b>LENS-TL37-LLWT</b> 
Third class fittings	Filters "nostalgia" <b>LENS-TL37-HSWT</b> 	Filters "identifiability" <b>LENS-TL37-RGWT</b> 	Filters "preference" <b>LENS-TL37-PFWT</b> 		
Fourth class fittings	Rimmed honeycomb <b>LENS-TL37-HCM</b> 	All black condenser <b>LENS-TL37-SNOOT-B</b>	White outside and black inside condenser <b>LENS-TL37-SNOOT-W</b>		
Fifth class fittings	Black four-leaf shade <b>LENS-TL37-BD-BK</b>	White four-leaf shade <b>LENS-TL37-BD-WT</b>			
Sixth class fittings	On-board &0~10V Dimmer module (black) <b>PART-TL37-D-BK</b>	On-board &0~10V Dimming module (white) <b>PART-TL37-D-WT</b>	DALI Dimmer module (Black) <b>PART-TL37-A-BK</b>		DALI Dimmer Module (White) <b>PART-TL37-A-WT</b> 

Note: Up to six types of accessories can be installed, and each type of accessories can be installed at most one at the same time

**Track connection diagram**

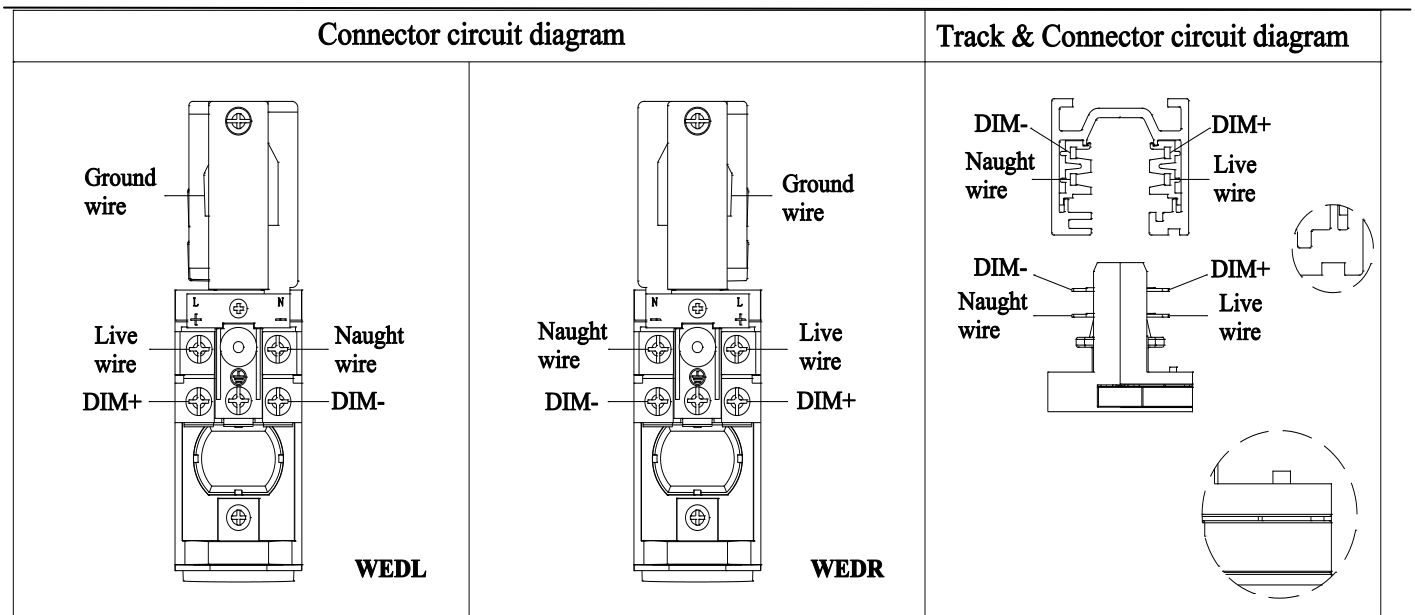

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn

(China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road, Shanghai 201204,China

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

# MERE - MODEL: TL38SLM

## W Track Luminaires

# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

**Product Image**



**Line Drawing**

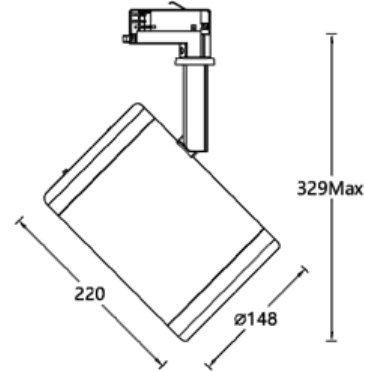

### Product Description

The MERE series LED track spotlights adopt a modular design that is suitable for the W track system. The exterior design is exquisite and there is no visible heat sink. The lamp body is made of die cast aluminum and uses COB luminous modules, which can provide rich beam angle configurations. More importantly, different beam angle accessories can be replaced by hand on site, which can be used for key lighting or environmental lighting. The lighting fixtures are equipped with flicker free driving appliances and can also replace different dimming modules on site. They are widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

### Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Reflector
- Finish: Static electricity powder coating, BK/WT
- Adjustable Angle: Horizontal 0~365°, Vertical 0-90°
- Accessories: Refer to the accessories list, each type of accessories can only be added one
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 3.2Kg without packing

### Product Specifications

- LED Type: COB
- LED power: 38W/48W/58W, built-in power shift
- Source Lm: 2700K: 3800lm (38W) / 4800lm (48W) / 5800lm (58W)  
3000K: 3950lm (38W) / 5000lm (48W) / 6050lm (58W)  
3500K: 4100lm (38W) / 5150lm (48W) / 6250lm (58W)  
4000K: 4300lm (38W) / 5250lm (48W) / 6500lm (58W)
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K, Ra90 / Ra97(>Ra95)
- SDCM: 2 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: On-off+0-10V /DALI (A match test is required)

### Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL38S MERE	LM38 COB 38W	D 0-10V+ On-board A DALI	1 12°	9 90 A 97	27 2700K	WT White BK Black
	LM48 COB 48W		2 24°		30 3000K	
	LM58 COB 58W		3 36°		35 3500K	
	W Wash		40 4000K			
	F 15°- 50°					
TL38S	LM48	D	2	9	30	WT

Example: TL38SLM48-D-2930WT

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.com.cn (China)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)  
14, Lane 299, Bi Sheng Road, Shanghai 201204  
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products. 2024-01-25

**MERE-** MODEL: TL38SLM


















W Track Luminaires

**WAC**

PROJECT:


TYPE:

**Accessories**

First class fittings	lens "angle 1" <b>LENS-TL38-C1BK</b> 	Lens "Angle 2" <b>LENS-TL38-C2BK</b> 	Lens "Angle 3" <b>LENS-TL38-C3BK</b> 	Lens "Angle 5" <b>LENS-TL38-C5BK</b> 	Lens "Angle F" <b>LENS-TL38-CFBK</b> 
Second class fittings	Flat lens "wall washing" <b>LENS-TL38-WWWT</b> 	Flat lens "stretching" <b>LENS-TL38-EEWT</b> 	Flat lens "Weak mixed light" <b>LENS-TL38-SSWT</b> 	Flat lens "Medium mixed light" <b>LENS-TL38-MMWT</b> 	Flat lens "Strong mixed light" <b>LENS-TL38-LLWT</b> 
Third class fittings	Filters "nostalgia" <b>LENS-TL38-HSWT</b> 		Filters "identifiability" <b>LENS-TL38-RGWT</b> 		Filters "preference" <b>LENS-TL38-PFWT</b> 
Fourth class fittings	Rimmed honeycomb <b>LENS-TL38-HCM</b> 	All black condenser <b>LENS-TL38-SNOOT-B</b>		White outside and black inside condenser <b>LENS-TL38-SNOOT-W</b> 	
Fifth class fittings	Black four-leaf shade <b>LENS-TL38-BD-BK</b>	White four-leaf shade <b>LENS-TL38-BD-WT</b>			
Sixth class fittings	On-board &0~10V Dimmer module (black) <b>PART-TL38-D-BK</b>	On-board &0~10V Dimming module (white) <b>PART-TL38-D-WT</b>	DALI Dimmer module (Black) <b>PART-TL38-A-BK</b>		DALI Dimmer module (White) <b>PART-TL38-A-WT</b> 

Note: Up to six types of accessories can be installed, and each type of accessories can be installed at most one at the same time

**Track connection diagram**

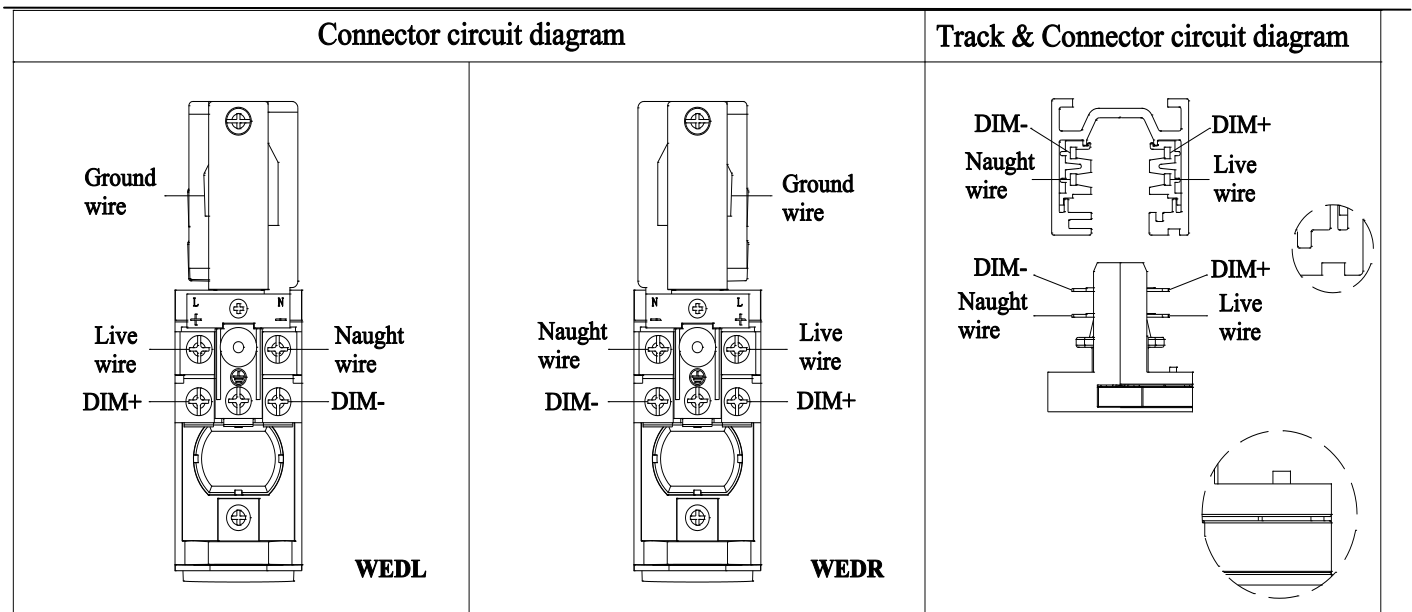

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn

(China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road, Shanghai 201204,China

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598



# MERE - MODEL: TL38SLM

## W Track Luminaires

# WAC LIGHTING

Responsible Lighting®


PROJECT:

TYPE:

**Product Image**



**Line Drawing**

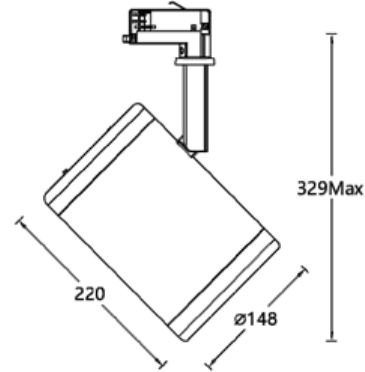

### Product Description

The MERE series LED track spotlights adopt a modular design that is suitable for the W track system. The exterior design is exquisite and there is no visible heat sink. The lamp body is made of die cast aluminum and uses COB luminous modules, which can provide rich beam angle configurations. More importantly, different beam angle accessories can be replaced by hand on site, which can be used for key lighting or environmental lighting. The lighting fixtures are equipped with flicker free driving appliances and can also replace different dimming modules on site. They are widely used in museums, art galleries, commercial spaces, hotels, retail and other places.

### Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens+Reflector
- Finish: Static electricity powder coating, BK/WT
- Adjustable Angle: Horizontal 0~365°, Vertical 0-90°
- Accessories: Refer to the accessories list, each type of accessories can only be added one
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 3.2Kg without packing

### Product Specifications

- LED Type: COB
- LED power: 10W
- Source Lm: 2700K: 1000lm (10W)      3000K: 1050lm (10W)  
3500K: 1080lm (10W)      4000K: 1100lm (10W)
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K / 3000K / 3500K / 4000K, Ra90 / Ra97(>Ra95)
- SDCM: 2 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: On-off+0-10V /DALI (A match test is required)

### Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL38S MERE	LM10 COB 10W	D 0-10V+ On-board A DALI	V 2°	9 90 A 97	27 2700K 30 3000K 35 3500K 40 4000K	WT White BK Black
TL38S	LM10	D	V	9	30	WT

Example: TL38SLM10-D-V930WT

# MERE - MODEL: TL38SLM

## W Track Luminaires


















# WAC LIGHTING

Responsible Lighting®

PROJECT:

TYPE:

### Accessories

First class fittings	Flat lens "wall washing"  <b>LENS-TL38-WWWT</b>	Flat lens "stretching"  <b>LENS-TL38-EEWT</b>	Flat lens "Weak mixed light"  <b>LENS-TL38-SSWT</b>	Flat lens "Medium mixed light"  <b>LENS-TL38-MMWT</b>	Flat lens "Strong mixed light"  <b>LENS-TL38-LLWT</b>
Second class fittings	Filters "nostalgia"  <b>LENS-TL38-HSWT</b>		Filters "identifiability"  <b>LENS-TL38-RGWT</b>		Filters "preference"  <b>LENS-TL38-PFWT</b>
Third class fittings	Rimmed honeycomb  <b>LENS-TL38-HCM</b>	All black condenser  <b>LENS-TL38-SNOOT-B</b>	White outside and black inside condenser  <b>LENS-TL38-SNOOT-W</b>		
Fourth class fittings	Black four-leaf shade  <b>LENS-TL38-BD-BK</b>	White four-leaf shade  <b>LENS-TL38-BD-WT</b>			
Fifth class fittings	On-board &0~10V Dimmer module (black)  <b>PART-TL38-D-BK</b>	On-board &0~10V Dimming module (white)  <b>PART-TL38-D-WT</b>	DALI Dimmer module (Black)  <b>PART-TL38-A-BK</b>	DALI Dimmer Module (White)  <b>PART-TL38-A-WT</b>	

Note: Up to six types of accessories can be installed, and each type of accessories can be installed at most one at the same time

### Track connection diagram

