

# OCULARC WALL WASHER - MODEL: SL46W

Mini Track Luminaires(24V)

# WAC


PROJECT :

TYPE :

## Product Image



## Line Drawing

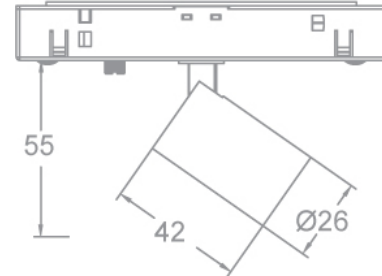

## Product Description

The Ocularc Wall Washer(hereinafter referred to as WW) low-voltage track lighting fixtures are suitable for WAC mini track systems, with flexible and compact lighting fixtures; Adopting WAC's leading SUBROSA dimming technology with a built-in 30 ° anti glare angle, achieving the ultimate anti glare effect; It can adjust the beam angle infinitely to meet the needs of different application environments and is widely used in exhibition cabinet spaces in museums and art galleries.

## Product Features

- Body Material: Aluminum alloy fixture body
- Optical System: Doublet lens
- Finish: Liquid paint, black (BK)
- Adjustable Angle: Horizontal adjustment from 0 ° to 365 °; Vertical 0-90 ° adjustment
- Accessories: As attached
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

## Product Specifications

- LED Type: HP LED
- Light power: 3W
- Source Lm: 3000K:250LM; 4000K:265LM
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Optional Ra90 or Ra97 (>Ra95)
- SDCM: 3 SDCM
- Input: 24VDC
- Dimming: On boarding knob dimming (range 10%~100%) or ON-OFF (supports system dimming, requires external dimmable constant voltage appliances, and matches the dimming system)
- Net Weight: About 0.08kg, without packaging

## Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
SL46W Ocularc WW	LD03 LED 3W	O On-boarding	W Washer	9 90	30 3000K	BK Black
		E ON-OFF <sup>①</sup>		A 97	40 4000K	
SL46W	LD03	O	W	9	30	BK

Example : SL46WLD03-O-W930BK

Note: ①Supports system dimming and requires an external dimmable constant voltage device (dimming method is determined by the constant voltage device)

# OCULARC WALL WASHER - MODEL: SL46W

Mini Track Luminaires(24V)



PROJECT :


TYPE :

## Accessories

<p><b>Low voltage track mini track</b> Provide specifications of 1m, 2m, and 3m</p> <p>MT1M-BK-C 1m track MT2M-BK-C 2m track MT3M-BK-C 3m track</p>		<p><b>Track power supply end</b> MLE-BK-C</p>
<p><b>Type I track connector</b> MI-BK-C</p>		<p><b>Type L track connector</b> ML-BK-C</p>


Note: The low-voltage track adopts surface installation and comes with two end caps; If hanging installation is required for low-voltage tracks, please contact WAC.

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

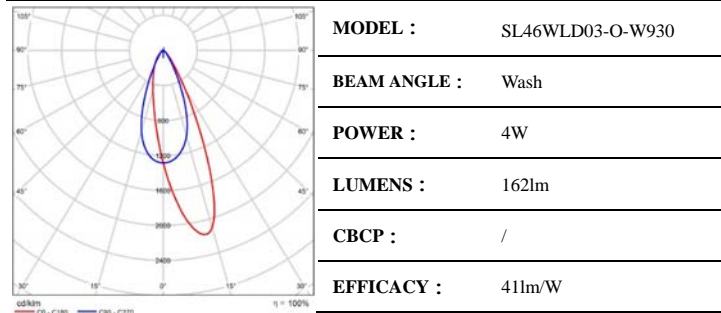

## System Dimming Wiring Diagram (Fixture Model: SL46WLD03-E)

This circuit lighting fixture can support system dimming, and the wiring diagram is as follows (the dimming method is determined by the constant voltage electrical appliance). It is necessary to conduct dimming matching tests in advance.

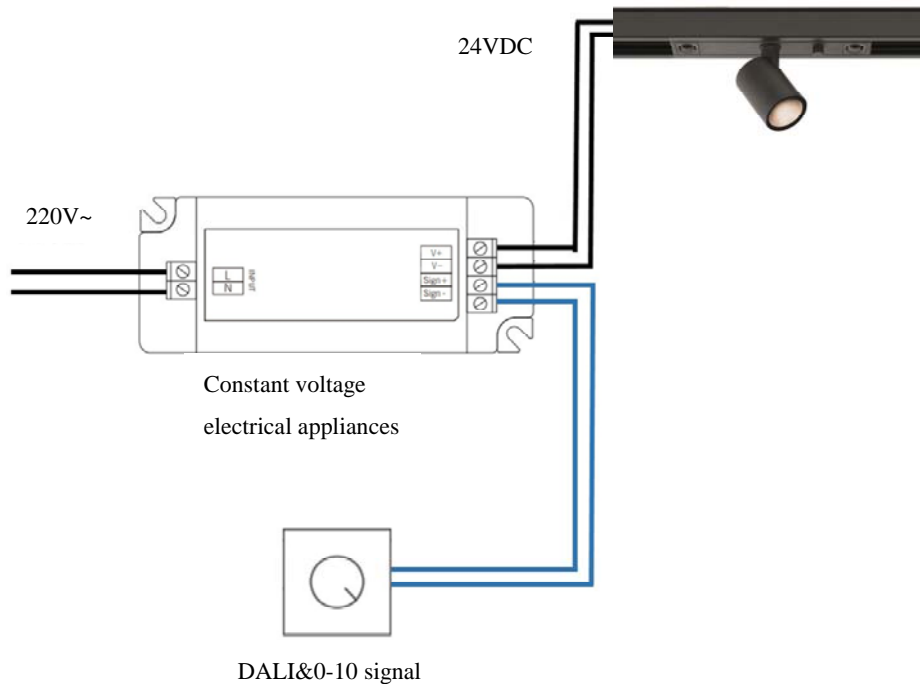

# OCULARC WALL WASH - MODEL: SL48W

Mini Track Luminaires(24V)

# WAC


PROJECT :

TYPE :

## Product Image



## Line Drawing



## Product Description

The Ocularc Wall Washer (hereinafter referred to as WW) low-voltage track lighting fixtures are suitable for WAC mini track systems, with flexible and compact lighting fixtures; Adopting WAC's leading SUBROSA dimming technology with a built-in 30° anti glare angle, achieving the ultimate anti glare effect; It can adjust the beam angle infinitely to meet the needs of different application environments and is widely used in exhibition cabinet spaces in museums and art galleries.

## Product Features

- Body Material: Aluminum alloy fixture body
- Optical System: Doublet lens
- Finish: Liquid paint, black (BK)
- Adjustable Angle: Horizontal adjustment from 0° to 365°; Vertical 0-90° adjustment
- Accessories: As attached
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

## Product Specifications

- LED Type: HP LED
- Light power: 10W
- Source Lm: 3000K:950LM; 4000K:1000LM
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Optional Ra90 or Ra97 (>Ra95)
- SDCM: 3 SDCM
- Input: 24VDC
- Dimming: On boarding knob dimming (range 10%~100%) or ON-OFF (supports system dimming, requires external dimmable constant voltage appliances, and matches the dimming system)
- Net Weight: About 0.2kg, without packaging

## Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
SL48W Ocularc WW	LD10 LED 10W	O On-boarding	W Washer	9 90	30 3000K	BK Black
		E ON-OFF <sup>①</sup>		A 97	40 4000K	
SL48W	LD10	O	W	9	30	BK

Example : SL48WLD10-O-W930BK

Note: ① Supports system dimming and requires an external dimmable constant voltage device (dimming method is determined by the constant voltage device)

# OCULARC WALL WASH - MODEL: SL48W

Mini Track Luminaires(24V)



PROJECT :


TYPE :

## Accessories

<p><b>Low voltage track mini track</b> Provide specifications of 1m, 2m, and 3m</p> <p>MT1M-BK-C 1m track MT2M-BK-C 2m track MT3M-BK-C 3m track</p>		<p><b>Track power supply end</b> MLE-BK-C</p>
<p><b>Type I track connector</b> MI-BK-C</p>		<p><b>Type L track connector</b> ML-BK-C</p>

Note: The low-voltage track adopts surface installation and comes with two end caps; If hanging installation is required for low-voltage tracks, please contact WAC.

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

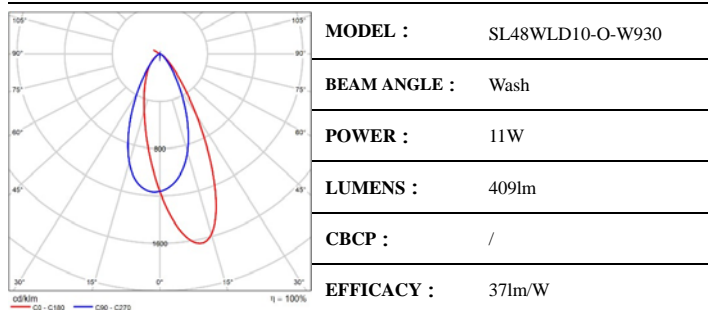

## System Dimming Wiring Diagram (Fixture Model: SL48WLD10-E)

This circuit lighting fixture can support system dimming, and the wiring diagram is as follows (the dimming method is determined by the constant voltage electrical appliance). It is necessary to conduct dimming matching tests in advance.

