

OCULARC WALL WASHER - Surface Mounted Luminaires

MODEL:SR46W
/ME46W

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

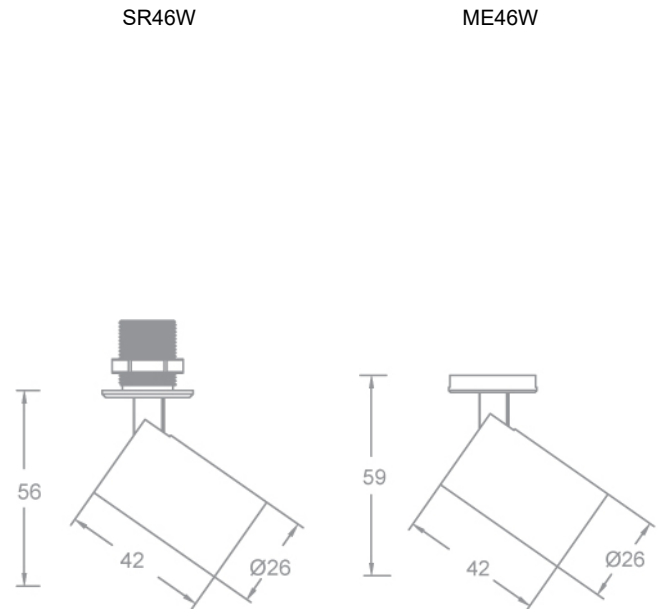

Product Description

The Ocularc Wall Washer (hereinafter referred to as WW) series low-voltage track lighting fixtures can be selected for hole embedded installation or surface magnetic suction installation. The lighting fixtures are flexible, compact, and have the same appearance as the Oculus Focus version; Adopting WAC's leading optical technology, it can evenly wash and brighten the illuminated surface, meeting the needs of different application environments, and is widely used in exhibition cabinet spaces in museums and art galleries.

Product Features

- Body Material: Aluminum alloy lamp body
- Optical System: doublet lens
- Finish: Liquid paint, black(BK)
- Adjustable Angle: Horizontal adjustment from 0° to 365°; Vertical 0-90° adjustment
- Accessories: See attached table
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature:-20°C~40°C

Product Specifications

- installation dimensions:SR46W: Opening Ø 17, installation thickness 1-15mm
- ME46W: Magnetic suction installation requires the installation of iron surface in a suitable position on the display cabinet
- LED Type: HP LED
- Light source power: 3W
- Source Lm: 3000K: 250lm; 4000K: 265lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K / 4000K; Ra90 和 Ra97(>Ra95)optional
- SDCM: 3 SDCM
- Input: constant current 1000mA max (3VDC)
- Dimming: Matchable MTB power splitter (3W), please refer to its specification sheet (ordered separately)
- Net Weight: Approximately 0.1kg, without packaging

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-03-07

OCULARC WALL WASHER -
Surface Mounted Luminaires

MODEL:SR46W
/ME46W



PROJECT:

TYPE:

Order Model

ME46W SR46W Ocularc WW	LD03 LED 3W	M MTB driver N Single wire	W Washer	9 90 A 97	30 3000K 40 4000K	BK Black
SL46W	LD03	M	W	9	30	BK
Model	LED	Dimming	Beam	CRI	CCT	Finish

Example: ME46WLD03-M-W930BK

Note: The lighting fixtures do not include electrical appliances and need to be ordered separately

OCULARC WALL WASHER -
Surface Mounted Luminaires

MODEL:SR46W
/ME46W

WAC

PROJECT:

TYPE:

accessory

MTB-CABLE-1000-BK


ME/SR46WLD03-M Dedicated extension cable: used between MTB power splitter and ME/SR46WLD03-M series display cabinet lighting fixtures, with a total length of 1m and quick connect plugs at both ends



pour: ME/SR46WLD03-M The length of the input wire for the original lighting fixture is approximately 0.5m.

Dedicated MTB power splitter (<http://www.waclighting.com.cn/products/detail/3147>) and extension cables need to be ordered separately.

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

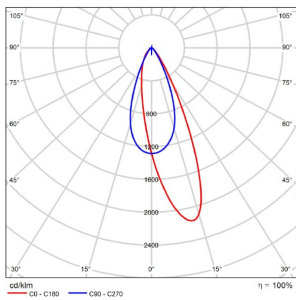

MODEL: SR46WLD03-M-F930

BEAM ANGLE: WASHER

POWER: EXCLUDE DRIVER

LUMENS: 44LM

CBCP: /

EFFICACY: /

OCULARC WALL WASHER - MODEL:SR48W/ME48W WAC LIGHTING

Surface Mounted Luminaires

Responsible Lighting®

PROJECT:

TYPE:



Product Image



Line Drawing

SR48W

ME48W

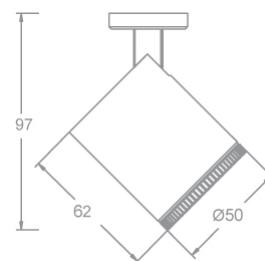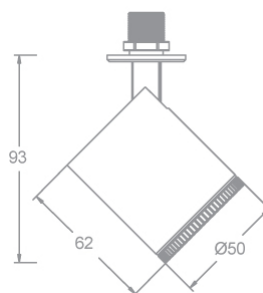

Product Description

The Ocularc Wall Washer (hereinafter referred to as WW) series low-voltage track lighting fixtures can be selected for hole embedded installation or surface magnetic suction installation. The lighting fixtures are flexible, compact, and have the same appearance as the Oculus Focus version; Adopting WAC's leading optical technology, it can evenly wash and brighten the illuminated surface, meeting the needs of different application environments, and is widely used in exhibition cabinet spaces in museums and art galleries..

Product Features

- Body Material: Aluminum alloy lamp body
- Optical System: doublet lens
- Finish: Liquid paint, black (BK)
- Adjustable Angle: Horizontal adjustment from 0° to 365°; Vertical 0-90° adjustment
- Accessories: See attached table
- Certification: CQC
- IP Rating: IP20
- Insulation Level: Class III
- Operating Temperature: -20°C~40°C

Product Specifications

- Installation dimensions: SR48W is an embedded hole installation with a diameter of $\Phi 17$. ME48W magnetic suction installation with a thickness of 1-15mm, iron surface needs to be installed in a suitable position on the display cabinet
- LED Type: HP LED
- Light source power: 10W
- Source Lm: 3000K: 950lm; 4000K: 1000lm
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K / 4000K; Ra90 and Ra97 (>Ra95) are optional
- SDCM: 3 SDCM
- Input: Constant current 800mA max (voltage drop 12VDC)
- Dimming: Can be driven externally, please refer to the accessory specification sheet (to be ordered separately)
- Net Weight: Approximately 0.2Kg, without packaging

OCULARC WALL WASHER - MODEL:SR48W/ME48W WAC LIGHTING

Surface Mounted Luminaires

Responsible Lighting®

PROJECT:

TYPE:

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ME48W	LD10 LED 10W	N Single wire	W Washer	9 90	30 3000K	BK Black
SR48W Ocularc WW				A 97	40 4000K	
SL48W	LD10	N	W	9	30	BK

Example: ME48WLD10-N-W930BK

Note: The lighting fixtures do not include electrical appliances and need to be ordered separately

OCULARC WALL WASHER - MODEL:SR48W/ME48W WAC LIGHTING

Surface Mounted Luminaires

Responsible Lighting®

PROJECT:

TYPE:

accessory


LD-070MA14D-LF-C

Special electrical appliances: Input 220V~240VAC/50Hz, output 700mA (power 9W), 8-12V supports 0-10V dimming, can drive 1 display cabinet light Dimensions (L * W * H): 115 * 43 * 25, mm



Note: Electrical appliances need to be ordered separately, excluding wires

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

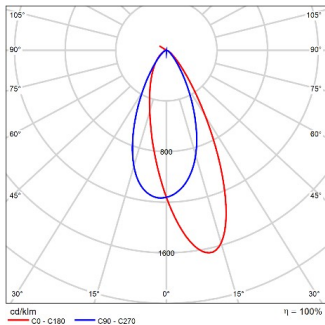

MODEL:	SR48WLD10-N-W930
BEAM ANGLE:	Wash
POWER:	10W (Excluding electrical appliances)
LUMENS:	409lm
CBCP:	/
EFFICACY:	41lm/W