

# LIGNE PRO- MODEL: LLBPE-LD64B

Linear Luminaires

# WAC


PROJECT :

TYPE :

## Product Image



## Line Drawing

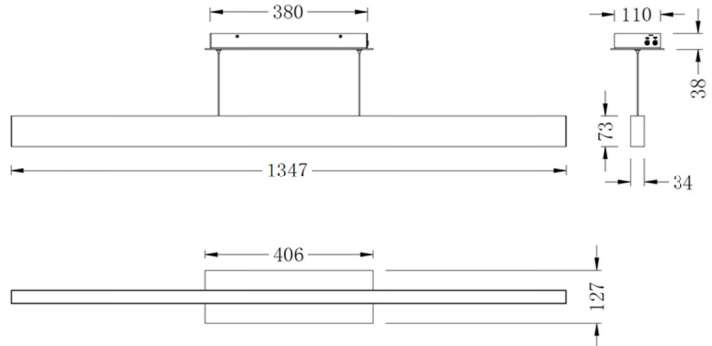

## Product Description

The LIGNE PRO pendant lamp has a variable beam Angle of 60°~130° on the upper output light, anti-glare surface on the lower output light, and a single lamp can be dimmed independently up and down. The lamps are suitable for lighting applications in commercial, office, conference and other places.

## Product Features

- Body Material: Aluminum alloy extrusion lamp body
- Optical System: Lens + Anti-glare panel
- Finish: Electrostatic Powder coating
- Projection Direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

## Product Specifications

- Cutoff Angle: /
- LED Type: SMD LED
- Source Lm: 3000K 7680lm; 4000K 8320lm;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: Wireless control
- Net Weight: 3Kg without packing

## Order Model

Model	LED Power	Driver	CCT	Beam	Reflector	Finish
<b>LLBPE</b>	<b>LD64</b> 64W	<b>B</b> Wireless Dimming	<b>30</b> 3000K	<b>9</b> 90°	<b>P</b> Panel	<b>WT</b> White
Linear pedants			<b>40</b> 4000K			<b>BK</b> Black
B series						
E Size						

Example : LLBPE-LD64B-309PWT

## Accessories

# LIGNE PRO- MODEL: LLBPE-LD64B


Linear Luminaires

# WAC


PROJECT :

TYPE :


## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL :</b>	LLBPE-LD64B-309PWT(下出光)
<b>BEAM ANGLE :</b>	90°
<b>POWER :</b>	37W
<b>LUMENS :</b>	2871 lm
<b>CBCP :</b>	1647 cd
<b>EFFICACY :</b>	78 lm/W



<b>MODEL :</b>	LLBPE-LD64B-309PWT(上出光)
<b>BEAM ANGLE :</b>	60°
<b>POWER :</b>	38W
<b>LUMENS :</b>	2815 lm
<b>CBCP :</b>	2496 cd
<b>EFFICACY :</b>	74 lm/W



<b>MODEL :</b>	LLBPE-LD64B-309PWT(上出光)
<b>BEAM ANGLE :</b>	130°
<b>POWER :</b>	38W
<b>LUMENS :</b>	2969 lm
<b>CBCP :</b>	2455 cd
<b>EFFICACY :</b>	78 lm/W

# LIGNE PRO- MODEL: LLBPE-LD64D

Linear Luminaires

# WAC


PROJECT :

TYPE :

## Product Image



## Line Drawing

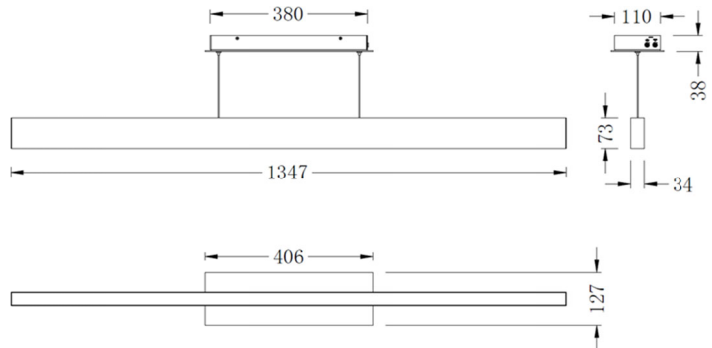

## Product Description

The LIGNE PRO pendant lamp has a large Angle batwing light distribution on the upper output light, anti-glare surface on the lower output light, and a single lamp can be independently dimmed up and down knob. The lamps are suitable for lighting applications in commercial, office, conference and other places.

## Product Features

- Body Material: Aluminum alloy extrusion lamp body
- Optical System: Lens + Anti-glare panel
- Finish: Electrostatic Powder coating
- Projection Direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

## Product Specifications

- Cutoff Angle: /
- LED Type: SMD LED
- Source Lm: 3000K 7680lm; 4000K 8320lm;
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K, Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: 0-10V&Built-in knob
- Net Weight: 3Kg without packing

## Order Model

Model	LED Power	Driver	CCT	Beam	Reflector	Finish
<b>LLBPE</b>	<b>LD64</b> 64W	<b>D</b> 0-10V Dimming	<b>30</b> 3000K	<b>9</b> 90°	<b>P</b> Panel	<b>WT</b> White
Linear pedants			<b>40</b> 4000K			<b>BK</b> Black
B series						
E Size						

Example : LLBPE-LD64D-309PWT

## Accessories

# LIGNE PRO- MODEL: LLBPE-LD64D


Linear Luminaires

# WAC


PROJECT :

TYPE :

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL :</b>	LLBPE-LD64D-309PWT
<b>BEAM ANGLE :</b>	90°
<b>POWER :</b>	37W
<b>LUMENS :</b>	2871 lm
<b>CBCP :</b>	1647 cd
<b>EFFICACY :</b>	78 lm/W



<b>MODEL :</b>	LLBPE-LD64D-309PWT
<b>BEAM ANGLE :</b>	130°
<b>POWER :</b>	38W
<b>LUMENS :</b>	2969 lm
<b>CBCP :</b>	2455 cd
<b>EFFICACY :</b>	78 lm/W