

INVISILED PIXELS - MODEL: LED-P


Linear Luminaires

WAC LIGHTING
Responsible Lighting®


PROJECT:

TYPE :

Product Image

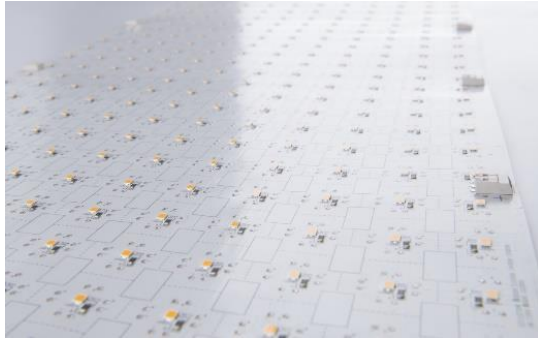

Line Drawing

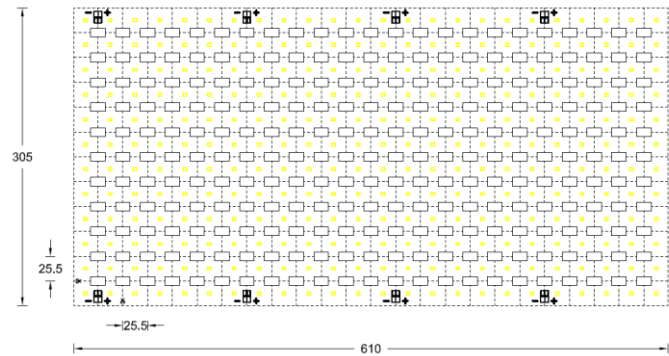

Product Description

Designed for luminous ceiling and luminous wall, InvisiLED Pixels is easy to install, and can be cut along the design grid to create creative shapes. Suitable for hotel villas, commercial space and other places.

Product Features

- **Body Material** : Flexible copper FPCB board
- **IP Rating** : IP20
- **Operating Temperature** : -20°C~50°C

Product Specifications

- **Light source** : SMD
- **Light source power** : 10W / 20W
- **Source Lm** : 10W 4000K 1000lm / 20W 4000K 2000lm
- **LED Lifetime** : >36000h-L70 / B10-Ta25°C (LM-80/TM-21)
- **CCT/CRI** : 2700K / 3000K / 3500K / 4000K / 5000K , Ra90
- **SDCM** : 3.5 SDCM
- **Input** : 24V DC
- **Dimming** : 0-10V, DMX512, DALI and other dimming control modules
- **Net Weight** : About 0.25Kg/pcs, without packaging

Order Model

Model	LED	Size	CRI	CCT
LED-P InvisiLED Pixels	10 10W/pcs	3060 305mm*610mm	9 90	27 2700K
	20 20W/pcs			30 3000K
				35 3500K
				40 4000K
				50 5000K

Example : LED-P10-3060-927

INVISIBLED PIXELS - MODEL: LED-P


Linear Luminaires

WAC LIGHTING
Responsible Lighting®

PROJECT:

TYPE :

Accessories

EN-24P-TL-20A-20	Switching power supply, output power 200W, input 220V 50Hz; Output: 24V DC; IP20 can be ordered separately	
EN-24P-TL-32A-20	Switching power supply, output power 320W, input 220V 50Hz; Output: 24V DC; IP20 can be ordered separately	

* For cutting, refer to the installation manual or consult WAC