

LIGHT PANEL - MODEL: OGR10306


Panel Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

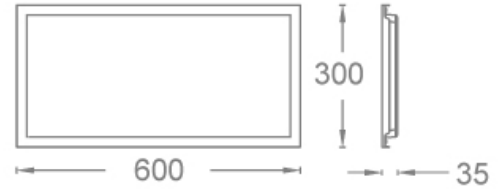

Product Description

WAC universal light panel, Using aluminum profile lamp body, Simple and beautiful appearance, Has good heat dissipation performance, Using anti glare prism optics, No visible glare, UGR less than 19, Has good anti glare performance and is able to, Use LED light source color consistency control, Ra90, No flicker, high light efficiency and energy saving, Comfortable lighting effect, Suitable for lighting applications in commercial, office, classroom, and other places.

Product Features

- Body Material: Aluminum extruded lamp body
- Optical System: Lens+prism plate
- Finish: Static electricity powder coating
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP40
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shielding Angle: /
- LED Type: SMD LED
- Source Lm: 3000K:20W 2600lm;24W 3120lm
4000K:20W 2700lm;24W 3240lm
5000K:20W 2700lm;24W 3240lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K,4000K,5000K ,Ra90 2700K-6
- SDCM: 5 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF /DMX512
- Net Weight: 1.28Kg without packing

Order Model

Model	Size (mm)	Power (W)	Driver	Beam Down	CCT	Finish
OGR1	0306 300*600mm	20 20W 24 24W	E ON-OFF D 0-10V Dimming	Y(Prism plate)	30 3000K 40 4000K 50 6000K	WT White

Example: OGR10306-20E-Y40WT

LIGHT PANEL - MODEL: OGR10306

Panel Luminaires

WAC


PROJECT:

TYPE:

ACCESSORY


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

配光资料 1 / 配光曲线 (极坐标)



MODEL:	OGR20205-20E-Y40WT
BEAM ANGLE:	/
POWER:	20.90W
LUMENS:	227.0lm
CBCP:	/
EFFICACY:	106.06lm/W

配光资料 1 / 配光曲线 (极坐标)



MODEL:	OGR20205-24E-Y40WT
BEAM ANGLE:	/
POWER:	25.62W
LUMENS:	2609.1lm
CBCP:	/
EFFICACY:	101.08lm/W