

# LIGNE II - MODEL: OP5512S


Linear Luminaires

# WAC


PROJECT:

TYPE:

## Product Image

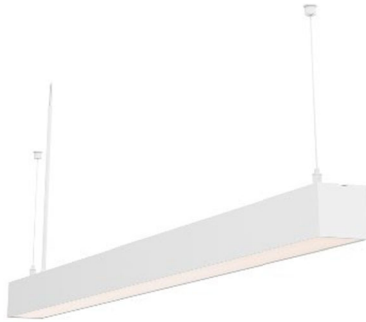

## Line Drawing

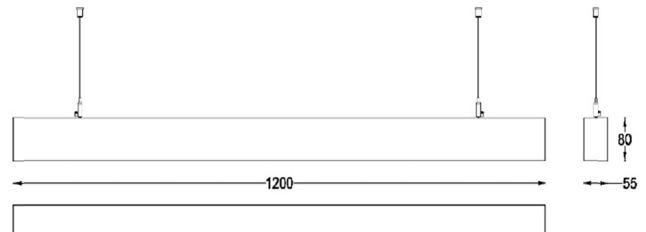

## Product Description

LIGNE II cable light, the use of aluminum lamp body, simple and beautiful appearance, the use of LED light source, has good heat dissipation, high efficiency and energy saving, good anti-glare, can be splicing end to end, can be customized length. Suitable for commercial, office lighting applications.

## Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

## Product Specifications

- Shielding Angle: /
- LED Type: SMD LED
- Source Lm: 4000K 4380lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/SDCM: 3000K/ 4000K/5000K, Ra90
- Color tolerance of light source: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0~10V (must be tested for compatibility with the project site system in advance)
- Net Weight: 2.87Kg without packing

## Order Model

Model	Length (mm)	Comment	Power (W)	Driver	Beam	CCT	Finish
OP55	12 1200	S Single Directional	35 35W	E ON-OFF D 0-10V Dimming	P (PC Shade)	30 3000K	WT White
					Y (PC Embossed Shade)	40 4000K	
						50 5000K	

Example: OP5512S-35E-P30WT

# LIGNE II - MODEL: OP5512S

Linear Luminaires

# WAC


PROJECT:

TYPE:

## Attachment

Model number	specificatio n	picture
<b>OP5512S-L</b>	L-shaped splice	
<b>OP5512S-T</b>	T-shaped splice	
<b>OP5512S-X</b>	Cruciform splice	

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	<u>OP5512S-35E-P30WT</u>
<b>BEAM ANGLE:</b>	<u>/</u>
<b>POWER:</b>	<u>36W</u>
<b>LUMENS:</b>	<u>3060 lm</u>
<b>CBCP:</b>	<u>/</u>
<b>EFFICACY:</b>	<u>85 lm/W</u>

# LIGNE II - MODEL: OP5512S

Linear Luminaires

# WAC


PROJECT:

TYPE:

## Product Image



## Line Drawing

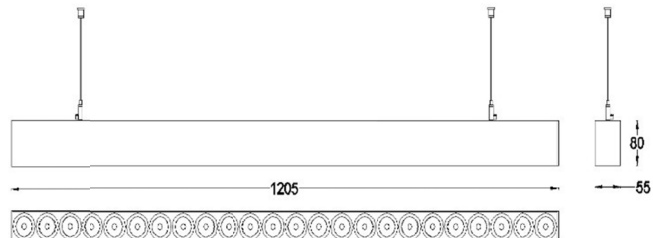

## Product Description

LIGNE II cable light, the use of aluminum lamp body, simple and beautiful appearance, anti-glare grille, the use of LED light source, has good heat dissipation, high efficiency and energy saving, can be splicing end to end, can be customized length. Suitable for commercial, office lighting applications.

## Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Lens + Anti-glare grille
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

## Product Specifications

- Shielding Angle: 38°
- LED Type: SMD LED
- Source Lm: 4000K 4380lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/ SDCM: 3000K/ 4000K/5000K, Ra90
- Color tolerance of light source: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: ON-OFF/0~10V (must be tested for compatibility with the project site system in advance)
- Net Weight: 3.05Kg without packing

## Order Model

Model	Length (mm)	Comment	Power (W)	Driver	Beam	CCT	Finish
OP55	12 1205	S Single Directional	35 35W	E ON-OFF D 0-10V Dimming	2 24°	30 3000K	WT White
					3 36°	40 4000K	
					4 45°	50 5000K	

Example: OP5512S-35E-230WT

# LIGNE II - MODEL: OP5512S


Linear Luminaires

# WAC

PROJECT:

TYPE:

## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



<b>MODEL:</b>	OP5512S-35E-330WT
<b>BEAM ANGLE:</b>	/
<b>POWER:</b>	36W
<b>LUMENS:</b>	2646 lm
<b>CBCP:</b>	/
<b>EFFICACY:</b>	73.5 lm/W