

SILO FOCUS - MODEL: ME15FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®


PRODUCT

TYPE:

Product Image



Line Drawing

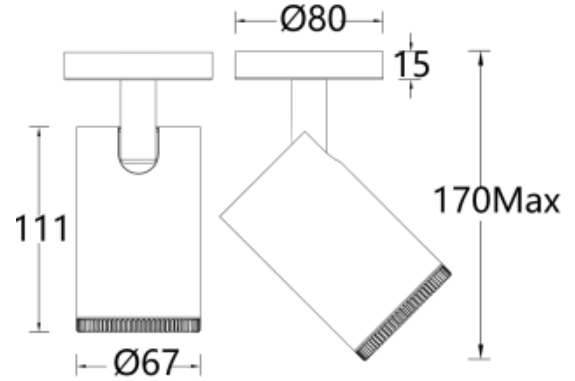

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminum lamp body, built-in stnon-flash drive electrical, using COB light module, can be stepless adjustment of light Angle, and the appearance size remains unchanged, can provide key lighting or environmental lighting, Widely used in various commercial Spaces, exhibition halls, hotels, retail and other places.

Product Features

- **Body Material:** Aluminum alloy die-cast lamp body
- **Optical System:** pancratic lens
- **Finish:** Electrostatic Powder coating, Black (BK), White (WT)
- **Adjustable Angle:** Level 0°~355° adjustment; Vertical adjustment 0~90°
- **Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C
- **Net Weight:** Approx. 0.5Kg, without packaging

Product specification

- **LED Type:** COB
- **Power:** 6W or 12W optional
- **Source Lm:** 2700K: 610lm (6W) / 1090lm (12W)
3000K: 670lm (6W) / 1200lm (12W)
4000K: 720lm (6W) / 1290lm (12W)
5000K: 770lm (6W) / 1380lm (12W)
- **LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K / 3000K / 4000K / 5000K , >Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V~240V AC / 50Hz
- **Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ME15F SILO Focus	LM06 COB 6W LM12 COB 12W	O On-board D 0-10V	F 12~50°	9 90	27 2700K	WT White BK Black
					30 3000K	
					40 4000K	
					50 5000K	
ME15F	LM12	O	F	9	30	WT

Example: ME15FLM12-O-F930WT

WAC Lighting

www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: ME15FLM

Surface Mounted Luminaires







WAC LIGHTING

Responsible Lighting®

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens LENS-16-BEL-C		Soft glass lenses LENS-16-BSL-SW		Frosted glass lenses LENS-16-FR		The endless bee net grid LENS-16-HCL	
Second class fittings	Anti-glare tube LENS-15-SNOOT							
Third class fittings	Four leaf shade TL-21-BD-SW							

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time


LIGHT DISTRIBUTION @3000K DATA

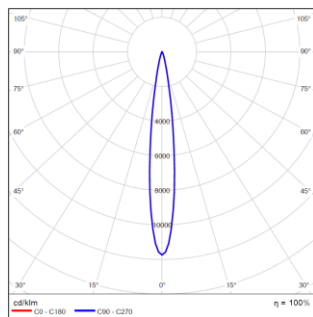


MODEL: ME15FLM06-O-F930
BEAM ANGLE: 12°
POWER: 8W
LUMENS: 183lm
CBCP: 2395cd
EFFICACY: 23lm/W

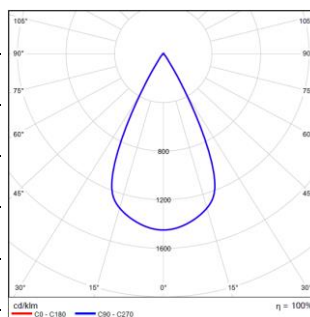

MODEL: ME15FLM06-O-F930
BEAM ANGLE: 50°
POWER: 8W
LUMENS: 291lm
CBCP: 424cd
EFFICACY: 36lm/W

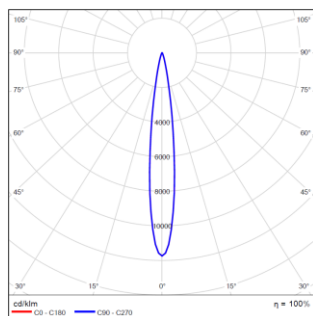

MODEL: ME15FLM12-O-F930
BEAM ANGLE: 12°
POWER: 14W
LUMENS: 272lm
CBCP: 3187cd
EFFICACY: 19lm/W

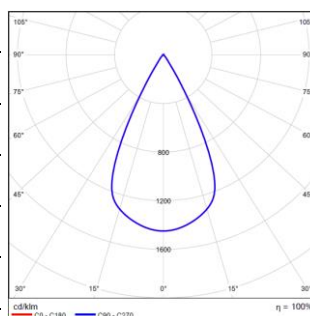

MODEL: ME15FLM12-O-F930
BEAM ANGLE: 50°
POWER: 14W
LUMENS: 425lm
CBCP: 616cd
EFFICACY: 30lm/W

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: ME16FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®


PRODUCT

TYPE:

Product Image



Line Drawing

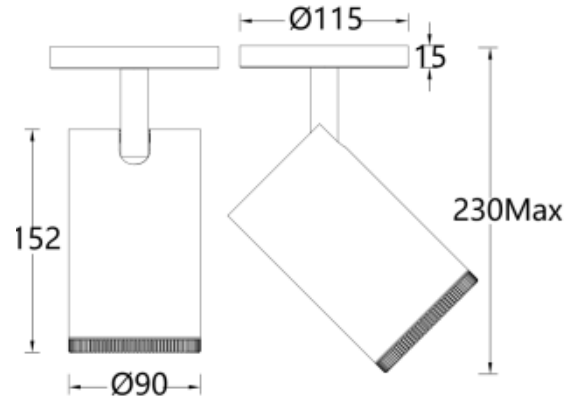

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminum lamp body, built-in stnon-flash drive electrical, using COB light module, can be stepless adjustment of light Angle, and the appearance size remains unchanged, can provide key lighting or environmental lighting, Widely used in various commercial Spaces, exhibition halls, hotels, retail and other places.

Product Features

- **Body Material:** Aluminum alloy die-cast lamp body
- **Optical System:** pancratic lens
Finish: Electrostatic Powder coating, Black (BK), White (WT)
Adjustable Angle: Level 0°~355° adjustment; Vertical adjustment 0~90°
- **Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C
- **Net Weight:** Approx. 1.0Kg, without packaging

Product specification

- **LED Type:** COB
- **Power:** 18W or 26W optional
- **Source Lm:** 2700K: 1550lm (18W) / 2270lm (26W)
3000K: 1700lm (18W) / 2500lm (26W)
4000K: 1820lm (18W) / 2670lm (26W)
5000K: 1950lm (18W) / 2870lm (26W)
- **LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K / 3000K / 4000K / 5000K , >Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V~240V AC / 50Hz
- **Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Model	LED	Dimming	Beam	CRI	CCT	Finish
ME16F SILO Focus	LM18 COB 18W LM26 COB 26W	O On-board A DALI D 0-10V	F 12~50°	9 90	27 2700K	WT White BK Black
					30 3000K	
					40 4000K	
					50 5000K	
ME16F	LM18	O	F	9	30	WT

Example: ME16FLM18-O-F930WT

WAC Lighting

www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: ME16FLM

Surface Mounted Luminaires








WAC LIGHTING

Responsible Lighting®

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens LENS-73-BEL-C 	Soft glass lenses LENS-73-BSL 	Frosted glass lenses LENS-73-FR 	The endless bee net grid LENS-73-HCL-C 
Second class fittings	Anti-glare tube LENS-20-SNOOT 	Anti-glare bee-net grille LENS-20-HCL 		
Third class fittings	Four leaf shade LENS-73-BD 			

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time


LIGHT DESTRIUTION @3000K DATA

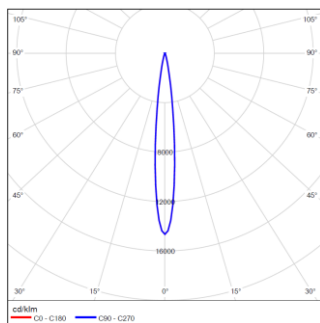


MODEL: ME16FLM18-O-F930
BEAM ANGLE: 12°
POWER: 21W
LUMENS: 319lm
CBCP: 4670cd
EFFICACY: 15lm/W

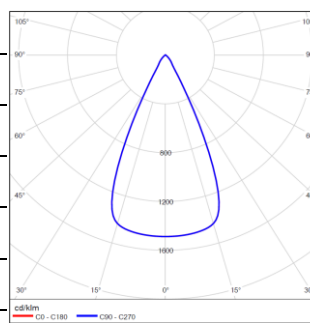

MODEL: ME16FLM18-O-F930
BEAM ANGLE: 50°
POWER: 21W
LUMENS: 463lm
CBCP: 689cd
EFFICACY: 22lm/W

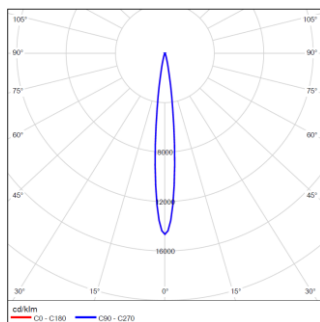

MODEL: ME16FLM26-O-F930
BEAM ANGLE: 12°
POWER: 30W
LUMENS: 439lm
CBCP: 5859cd
EFFICACY: 15lm/W

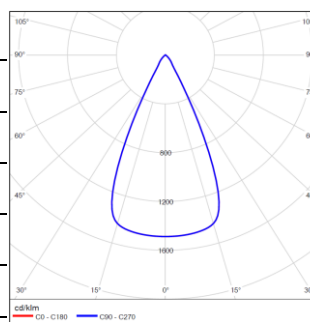

MODEL: ME16FLM26-O-F930
BEAM ANGLE: 50°
POWER: 30W
LUMENS: 639lm
CBCP: 952cd
EFFICACY: 21lm/W

SILO FOCUS - MODEL: ME17FLM

Surface Mounted Luminaires

WAC LIGHTING

Responsible Lighting®


PRODUCT

TYPE:

Product Image



Line Drawing

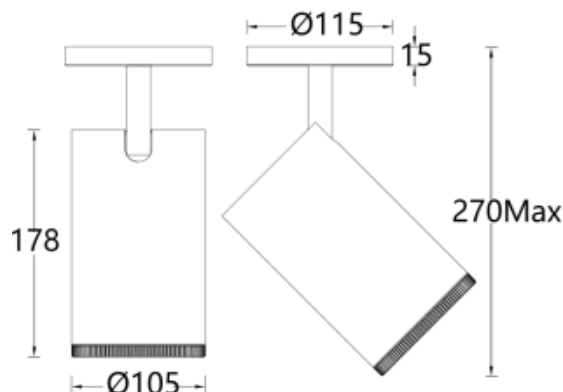

Product Description

SILO Focus series LED ceiling spotlights, exquisite appearance design, no visible radiator, made of die-cast aluminum, retail and other places.

Product Features

- **Body Material:** Aluminum alloy die-cast lamp body
- **Optical System:** parabolic lens
- **Finish:** Electrostatic Powder coating, Black (BK), White (WT)
- **Adjustable Angle:** Level 0°~355° adjustment; Vertical adjustment 0~90°
- **Accessories:** Up to three optical accessories can be added, and only one of each type of accessories can be added at the same time
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I
- **Operating Temperature:** -20°C~40°C
- **Net Weight:** Approx. 1.4Kg, without packaging

Product specification

- **LED Type:** COB
- **Power:** 34W
- **Source Lm:** 3280lm(2700k)/3660lm(3000k)
3880lm (4000K) / 4140lm (5000K)
- **LED Life:** >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 2700K / 3000K / 4000K / 5000K , >Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V~240V AC / 50Hz
- **Dimming:** Built-in knob dimming (dimming range 10%~100%) or 0-10V dimming (match test must be done with the project site in advance)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ME17F SILO Focus	LM34 COB 34W	O On-board A DALI D 0-10V	F 12~50°	9 90	27 2700K 30 3000K 40 4000K 50 5000K	WT White BK Black
ME17F	LM34	O	F	9	30	WT

Example: ME17FLM34-O-F930WT

WAC Lighting

www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

SILO FOCUS - MODEL: ME17FLM

Surface Mounted Luminaires








WAC LIGHTING

Responsible Lighting®

PRODUCT


TYPE:

Accessories


First class fittings	Striped glass lens LENS-73-BEL-C 	Soft glass lenses LENS-73-BSL 	Frosted glass lense: LENS-73-FR 	The endless bee net grid LENS-73-HCL-C 
Second class fittings	Anti-glare tube LENS-20-SNOOT 	Anti-glare bee-net grille LENS-20-HCL 		
Third class fittings	Four leaf shade TL-22-BD-SW 			

Note: Up to three optical accessories can be added, and each type of accessories can only be added one at a time

LIGHT DESTRIUTION @3000K DATA

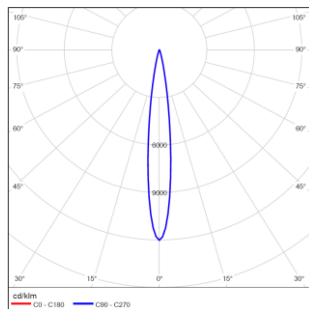

MODEL: ME17FLM34-O-F930
BEAM ANGLE: 12°
POWER: 38W
LUMENS: 564lm
CBCP: 6780cd
EFFICACY: 15lm/W

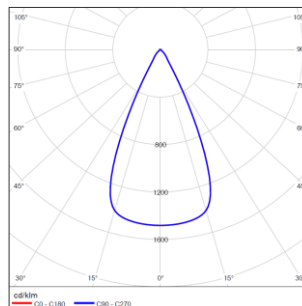

MODEL: ME17FLM34-O-F930
BEAM ANGLE: 50°
POWER: 38W
LUMENS: 813lm
CBCP: 1205cd
EFFICACY: 21lm/W

WAC Lighting

www.waclighting.com (US)

www.waclighting.com.cn (China)

Headquarters

44 Harbor Park Drive • Port Washington, NY

Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)

14,Lane 299, Bi Sheng Road,Shanghai 201204

Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598