

Universal lamp panel - MODEL: OGR20505


WAC

Panel Luminaires


PROJECT:

TYPE:

Product Image

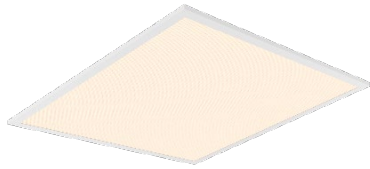

Line Drawing

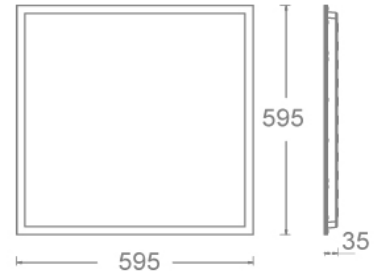

Product Description

WAC universal lamp panel, the use of aluminum lamp body, the appearance is simple and beautiful, with good heat dissipation performance. The use of anti-glare prism optics, no glare, UGR less than 19, with good anti-glare performance and light uniformity. Use LED light source color consistency control, Ra90, no stroboscopic, high light efficiency and energy saving. With a comfortable light effect, suitable for commercial, office, classroom and other places of lighting applications.

Product Features

- Body Material: Aluminum alloy extrusion lamp body
- Optical System: Lens + prism plate
- Finish: Electrostatic powder spraying
- Projection direction: /
- Accessories/Brackets: /
- Safety certification: CCC
- IP Rating: IP40
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications

- Shading Angle: /
- Light source type: SMD LED
- Source Lm: 3000K:36W 4680lm;40W 5200lm
4000K:36W 4860lm;40W 5400lm
5000K:36W 4860lm;40W 5400lm
- LED Lifetime:>50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 3000K/4000K/5000K, Ra90
- SDCM: 5SDCM
- Input voltage: 220V~240V AC/50Hz
- Dimming: ON-OFF/0-10V control (must be tested with the project site system in advance)
- Net Weight: 2.6Kg without packing

Order Model

Model	Size (mm)	Power (W)	Driver	Beam Down	CCT	Finish
OGR2	0505 595*595mm	36 36W	E ON-OFF	Y (Prism plate)	30 3000K	WT White
		40 40W	D 0-10V Dimming		40 4000K	
					50 5000K	

Example: OGR20505-36E-Y40WT

Accessories

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

Universal lamp panel - MODEL: OGR20505

WAC


Panel Luminaires

PROJECT:


TYPE:

/

LIGHT DISTRIBUTION@4000K LUMINAIRE DATA



MODEL: OGR20505-36E-Y40WT
BEAM ANGLE: /
POWER: 38.79W
LUMENS: 4163.7lm
CBCP: /
EFFICACY: 107.34lm/W



MODEL: OGR20505-40E-Y40WT
BEAM ANGLE: /
POWER: 43.06W
LUMENS: 4538.2lm
CBCP: /
EFFICACY: 105.40lm/W