

PLANA PRO MODEL: DLP33 RGBW
Recessed Ceiling Luminaires




PROJECT:

TYPE:

Product Image



Line Drawing

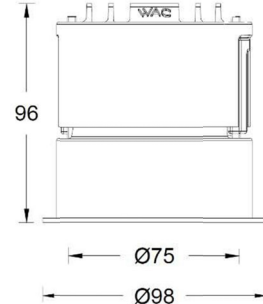

Product Description

The PLANA PRO tube lamp using SUBROSA® hidden light technology, combined with RGBW chips, can achieve illusory lighting and has good anti glare effect. Mainly suitable for hotels and commercial areas.

Product Features

- Body Material: Die-cast aluminum body
- Optical System: Lens+ SUBOROSA optical system
- Finish: Electrostatically powder coated
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications


- Cut-out: Ø93mm
- Ceiling Thickness: 1mm~35mm
- Shielding Angle: 35°
- LED Type: RGBW 4in1
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: RGB+3000K, Ra90
- Input: 24V DC
- Dimming: DMX512
- Net Weight: 1.0Kg without packing

Order Model

Model	Size	Trim	LED	Driver	CCT	Beam	Reflector	Finish
DLP	3	3	LD14	M	F3	4 40°	B Black	WT White
Downlight	3"	Round Trim	14W	DMX512 Dimming	RGBW(3000K)	6 60°		BK Black
P series				24V DC Power Supply				

Example: DLP33-LD14M-F34BBK

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

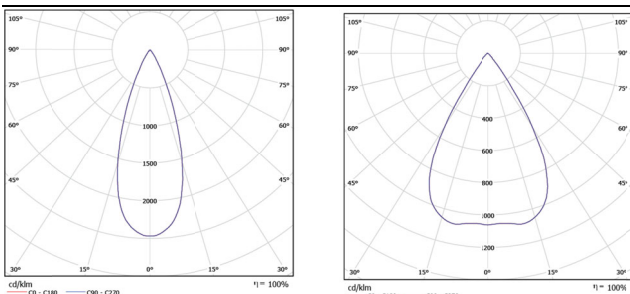

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road, Shanghai 201204,China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-01-22

PLANA PRO MODEL: DLP43 RGBW
Recessed Ceiling Luminaires




PROJECT:

TYPE:

Product Image



Line Drawing

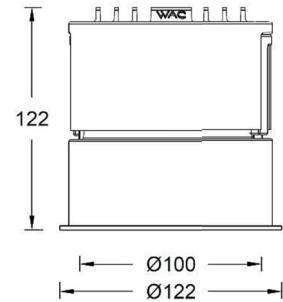

Product Description

The PLANA PRO tube lamp using SUBROSA® hidden light technology, combined with RGBW chips, can achieve illusory lighting and has good anti glare effect. Mainly suitable for hotels and commercial areas.

Product Features

- Body Material: Die-cast aluminum body
- Optical System: Lens+ SUBOROSA optical system
- Finish: Electrostatically powder coated
- Adjustable Angle: /
- Accessories: /
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

Product Specifications



- Cut-out: Ø116mm
- Ceiling Thickness: 1mm~35mm
- Shielding Angle: 35°
- LED Type: RGBW 4in1
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: RGB+3000K, Ra90
- Input: 24V DC
- Dimming: DMX512
- Net Weight: 1.45Kg without packing

Order Model

Model	Size	Trim	LED	Driver	CCT	Beam	Reflector	Finish
DLP	4	3	LD24	M	F3	4 40°	B Black	WT White
Downlight	4"	Round Trim	24W	DMX512 Dimming	RGBW(3000K)	6 60°		BK Black
P series				24V DC Power Supply				

Example: DLP43-LD24M-F34BBK

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

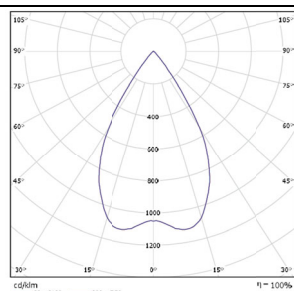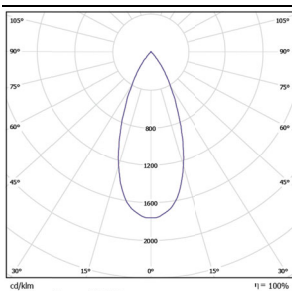

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road, Shanghai 201204,China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598