

ULTRA – MODEL:SLN36


Ceiling Mount Luminaires

WAC


PROJECT:

TYPE:

Product Image



Line Drawing

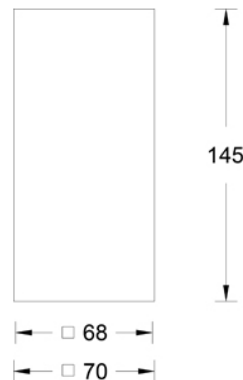

Product Description

ULTRA series LED square exposed tube lamp adopts a modular design, and the on-site lamps can be freely disassembled and replaced with reflectors and lamp bodies, thereby achieving free switching of various specifications and lighting methods. In terms of optics, a brand new hidden light technology is adopted, which has good anti glare performance and color consistency control, and has a comfortable lighting effect. It is mainly suitable for indoor places such as hotels, villas, and commercial spaces.

Product Features

- Body Material: Aluminum alloy die-casting lamp body
- Optical System: Lens +Anti-glare reflector
- Finish: Electrostatic powder coating
- Projection direction: /
- Accessories: See accessory list
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C
- Product weight: About 0.36kg, excluding packaging
- Shielding angle: 35°

Product Specifications

- LED Type: COB
- Source Lm:
 - 2700K: 8W 682lm; 7W 758lm; 10W 1080lm; 13W 1404lm
 - 3000K: 8W 720lm; 7W 800lm; 10W 1150lm; 13W 1495lm
 - 3500K: 8W 752lm; 7W 835lm; 10W 1195lm; 13W 1554lm
 - 4000K: 8W 765lm; 7W 850lm; 10W 1210lm; 13W 1573lm
 - 5000K: 8W 774lm; 7W 860lm; 10W 1220lm; 13W 1586lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000K, CRI≥Ra90
- Input: 220V AC / 50Hz
- Dimming: No dimming/0-10V(Matching testing needs to be done in advance)

Order Model

Model	Size	Trim	LED	Driver	Beam	CCT	Reflector	Finish
SLN Surface Mounted Downlight N series	3 3"	6 Rectangular Trimless	LM08 COB 8W	E On-Off D 0-10V Dimming	S 8°	27 2700K	B Black S Specular	WT White BK Black
			LM07 COB 7W		N 13°	30 3000K		
			LM10 COB 10W		1 18°	35 3500K		
			LM13 COB 13W		2 28°	40 4000K		
					3 36°	50 5000K		
				5 50°				

Example: SLN36-LM07E-N30SWT

NOTE: 8°, 13° and 18° factory default with honeycomb grille.

ULTRA- MODEL: SLN36

Ceiling Mount Luminaires





WAC LIGHTING

Responsible Lighting®

Project Name:


Type:

Accessory


LENS-11-BEL Striped Glass Lens 	LENS-11-BSL-ULTRA Smooth Glass Lens 	LENS-11-FR Frosted Glass Lens 	LENS-11-HCL-ULTRA Rimless Honeycomb 
--	---	---	---

NOTE: Up to one additional optical accessory may be added; the 8°, 13°, and 18° are factory defaulted with a rimless honeycomb grille.


Light Curve Distribution @3000K Data




MODEL	SLN36-LM07E-N30SWT
BEAM ANGLE:	13°
POWER:	9W
LUMENS:	466lm
CBCP:	5571cd
EFFICACY:	52lm/W




MODEL	SLN36-LM10E-N30SWT
BEAM ANGLE:	13°
POWER:	11W
LUMENS:	520lm
CBCP:	6220cd
EFFICACY:	47lm/W




MODEL	SLN36-LM13E-N30SWT
BEAM ANGLE:	13°
POWER:	16W
LUMENS:	676lm
CBCP:	8086cd
EFFICACY:	42lm/W




MODEL	SLN36-LM07E-130SWT
BEAM ANGLE:	18°
POWER:	9W
LUMENS:	721lm
CBCP:	5316cd
EFFICACY:	80lm/W




MODEL	SLN36-LM10E-130SWT
BEAM ANGLE:	18°
POWER:	11W
LUMENS:	817lm
CBCP:	6028cd
EFFICACY:	74lm/W



MODEL	SLN36-LM13E-130SWT
BEAM ANGLE:	18°
POWER:	16W
LUMENS:	1062lm
CBCP:	7836cd
EFFICACY:	66lm/W



MODEL	SLN36-LM07E-230SWT
BEAM ANGLE:	28°
POWER:	9W
LUMENS:	715lm
CBCP:	3052cd
EFFICACY:	79lm/W



MODEL	SLN36-LM10E-230SWT
BEAM ANGLE:	28°
POWER:	11W
LUMENS:	796lm
CBCP:	3396cd
EFFICACY:	72lm/W

WAC Lighting
www.waclighting.com (US)
www.waclighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14, Lane 299, Bi Sheng Road, Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

ULTRA- MODEL: SLN36


Ceiling Mount Luminaires

WAC LIGHTING


Responsible Lighting®

Project Name:


Type >




MODEL SLN36-LM13E-230SWT
BEAM ANGLE: 28°
POWER: 15W
LUMENS: 1035lm
CBCP: 4511cd
EFFICACY: 69lm/W




MODEL SLN36-LM07E-330SWT
BEAM ANGLE: 36°
POWER: 9W
LUMENS: 643lm
CBCP: 1497cd
EFFICACY: 71lm/W




MODEL SLN36-LM10E-330SWT
BEAM ANGLE: 36°
POWER: 11W
LUMENS: 804lm
CBCP: 1857cd
EFFICACY: 73lm/W




MODEL SLN36-LM13E-330SWT
BEAM ANGLE: 36°
POWER: 15W
LUMENS: 1024lm
CBCP: 2375cd
EFFICACY: 68lm/W




MODEL SLN36-LM07E-530SWT
BEAM ANGLE: 50°
POWER: 9W
LUMENS: 425lm
CBCP: 574cd
EFFICACY: 47lm/W



MODEL SLN36-LM10E-530SWT
BEAM ANGLE: 50°
POWER: 11W
LUMENS: 532lm
CBCP: 717cd
EFFICACY: 48lm/W



MODEL SLN36-LM13E-530SWT
BEAM ANGLE: 50°
POWER: 15W
LUMENS: 677lm
CBCP: 914cd
EFFICACY: 45lm/W



MODEL SLN36-LM08E-S30SWT
BEAM ANGLE: 8°
POWER: 10W
LUMENS: 375lm
CBCP: 9280cd
EFFICACY: 38lm/W