

2" Recessed Dual-head Downlight


PROJECT :

TYPE:

Product Image



Line Drawing

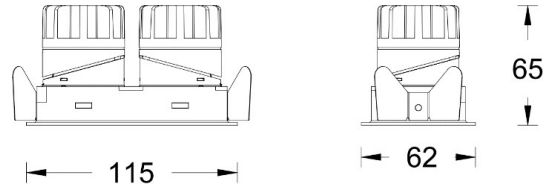

Product Description

ULTRA series LED narrow side recessed multiples lamps, through a unique Angle adjustment method, taking into account the function of downlight and adjustable (one lamp multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. Optical uses a new hidden light technology, good anti-glare performance and color consistency control, with comfortable light effect, mainly suitable for hotels, villas and commercial space and other indoor places.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens + anti-glare reflector
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical: 0-30°, Horizontal: 0-360°
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: 112*55mm
- Ceiling Thickness: 5mm~15mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: Single-head as follows, Two-head×2
 2700K: 5W 534lm; 7W 689lm;
 3000K: 5W 564lm; 7W 728lm;
 3500K: 5W 588lm; 7W 759lm;
 4000K: 5W 600lm; 7W 775lm;
 5000K: 5W 606lm; 7W 782lm;
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000K, CRI≥90
- Input: 220V AC / 50Hz
- Dimming: On-off /0-10V/DALI
- Net Weight: 0.3Kg without packing

Order Model

| Model | Size | Trim | LED | Driver | Beam | CCT | Reflector | Finish |
|---|---------|------------------------------|--------------|-----------------------|-------|----------------------|------------|----------|
| AMTN Multiple Downlight N series | 2 2" | 5 Rectangular Trimless | 205 COB 2*5W | E On-Off | 1 15° | 27 2700K | B Black | WT White |
| | | | 207 COB 2*7W | D 0-10V Dimming | 2 24° | 30 3000K | S Specular | BK Black |
| | | | 207 COB 2*7W | N No Driver A DALI | 3 36° | 35 3500K | | |
| | | | | | 5 50° | 40 4000K 50 5000K | | |

Example: AMTN25-207E230SWT

Note: 15°factory default with honeycomb





ULTRA - MODEL: AMTN25
2" Recessed Dual-head Downlight

WAC LIGHTING

PROJECT :


TYPE:

Accessories


| | | | |
|--|---|---|---|
| LENS-08-BEL Striped glass lens  | LENS-08-BSL Soft glass lens  | LENS-08-FR Frosted glass lens  | LENS-08-HCL Honeycomb  |
|--|---|---|---|

Note: Up to one optical accessory can be added; Which 15° factory default with honeycomb


LIGHT DISTRIBUTION@3000K LUMINAIRE DATA




| | |
|--------------------|-------------------|
| MODEL: | AMTN25-207E130SWT |
| BEAM ANGLE: | 15° |
| POWER: | 2*9W |
| LUMENS: | 2*316 lm |
| CBCP: | 2*2920 cd |
| EFFICACY: | 35 lm/W |



| | |
|--------------------|-------------------|
| MODEL: | AMTN25-207E230SWT |
| BEAM ANGLE: | 24° |
| POWER: | 2*9W |
| LUMENS: | 2*526 lm |
| CBCP: | 2*2442 cd |
| EFFICACY: | 58 lm/W |



| | |
|--------------------|-------------------|
| MODEL: | AMTN25-207E330SWT |
| BEAM ANGLE: | 36° |
| POWER: | 2*9W |
| LUMENS: | 2*509 lm |
| CBCP: | 2*1184 cd |
| EFFICACY: | 57 lm/W |



| | |
|--------------------|-------------------|
| MODEL: | AMTN25-207E530SWT |
| BEAM ANGLE: | 50° |
| POWER: | 2*9W |
| LUMENS: | 2*453 lm |
| CBCP: | 2*661 cd |
| EFFICACY: | 50 lm/W |

ULTRA - MODEL: AMTN35

WAC LIGHTING

3" Recessed Dual-head Downlight


PROJECT :

TYPE:

Product Image



Line Drawing

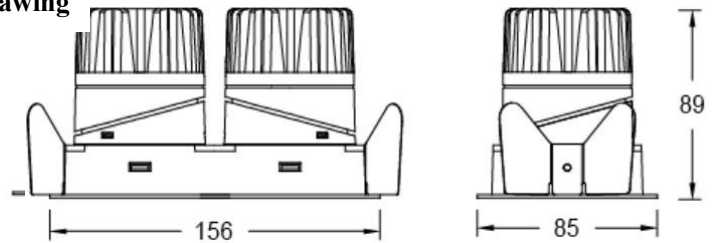

Product Description

ULTRA series LED narrow side recessed multiples lamps, through a unique Angle adjustment method, taking into account the function of downlight and adjustable (one lamp multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. Optical uses a new hidden light technology, good anti-glare performance and color consistency control, with comfortable light effect, mainly suitable for hotels, villas and commercial space and other indoor places.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens + anti-glare reflector
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical: 0-30° , Horizontal: 0-360°
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: 152*75mm
- Ceiling Thickness: 5mm~25mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: Single-head as follows, Two-head×2
 2700K: 8W 682lm; 7W 758lm; 10W 1080lm; 13W 1404lm
 3000K: 8W 720lm; 7W 800lm; 10W 1150lm; 13W 1495lm
 3500K: 8W 752lm; 7W 835lm; 10W 1195lm; 13W 1554lm
 4000K: 8W 765lm; 7W 850lm; 10W 1210lm; 13W 1573lm
 5000K: 8W 774lm; 7W 860lm; 10W 1220lm; 13W 1586lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000KCRI≥90
- Input: 220V AC / 50Hz
- Dimming: On-off /0-10V/DALI
- Net Weight: 0.9Kg without packing

Order Model

| Model | Size | Trim | LED | Driver | Beam | CCT | Reflector | Finish |
|---|------|------------------------------|---------------|--------------------------------|----------|----------|-----------------------|----------|
| AMTN Multiple Downlight N series | 3" | 5 Rectangular Trimless | 208 COB 2*8W | E On-Off D 0-10V Dimming | S 8° | 27 2700K | B Black S Specular | WT White |
| | | | 207 COB 2*7W | | N 13° | 30 3000K | | BK Black |
| | | | 210 COB 2*10W | | 1 18° | 35 3500K | | |
| | | | 213 COB 2*13W | 2 28° | 40 4000K | | | |
| | | | 213 COB 2*13W | 3 36° | 50 5000K | | | |
| | | | | N No Driver A DALI | 5 50° | | | |

Example: AMTN35-207EN30SWT

Note: 8°, 13°and 18°factory default with honeycomb

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
14,Lane 299, Bi Sheng Road,Shanghai 201204
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

ULTRA - MODEL: AMTN35





WAC LIGHTING

3" Recessed Dual-head Downlight

PROJECT :


TYPE:

Accessories


| | | | |
|--|---|---|---|
| LENS-11-BEL Striped glass lens  | LENS-11-BSL-ULTRA Soft glass lens  | LENS-11-FR Frosted glass lens  | LENS-11-HCL-ULTRA Honeycomb  |
|--|---|---|---|

Note: Up to one optical accessory can be added; 8°、13°and 18°factory default with honeycomb


LIGHT DISTRIBUTION@3000K LIMINAIRE DATA




| | |
|--------------------|-------------------|
| MODEL: | AMTN35-207EN30SWT |
| BEAM ANGLE: | 13° |
| POWER: | 2*9W` |
| LUMENS: | 2*533 lm |
| CBCP: | 2*5684 cd |
| EFFICACY: | 59 lm/W |




| | |
|--------------------|-------------------|
| MODEL: | AMTN35-210EN30SWT |
| BEAM ANGLE: | 13° |
| POWER: | 2*11W` |
| LUMENS: | 2*643 lm |
| CBCP: | 2*7056 cd |
| EFFICACY: | 58 lm/W |




| | |
|--------------------|-------------------|
| MODEL: | AMTN35-213EN30SWT |
| BEAM ANGLE: | 13° |
| POWER: | 2*15W` |
| LUMENS: | 2*820 lm |
| CBCP: | 2*8174 cd |
| EFFICACY: | 55 lm/W |




| | |
|--------------------|-------------------|
| MODEL: | AMTN35-207E130SWT |
| BEAM ANGLE: | 18° |
| POWER: | 2*9W |
| LUMENS: | 2*585 lm |
| CBCP: | 2*4163 cd |
| EFFICACY: | 65 lm/W |




| | |
|--------------------|-------------------|
| MODEL: | AMTN35-210E130SWT |
| BEAM ANGLE: | 18° |
| POWER: | 2*11W` |
| LUMENS: | 2*714 lm |
| CBCP: | 2*5090 cd |
| EFFICACY: | 65 lm/W |



| | |
|--------------------|-------------------|
| MODEL: | AMTN35-213E130SWT |
| BEAM ANGLE: | 18° |
| POWER: | 2*15W` |
| LUMENS: | 2*935 lm |
| CBCP: | 2*6848 cd |
| EFFICACY: | 62 lm/W |



| | |
|--------------------|-------------------|
| MODEL: | AMTN35-207E230SWT |
| BEAM ANGLE: | 28° |
| POWER: | 2*9W |
| LUMENS: | 2*641 lm |
| CBCP: | 2*2885 cd |
| EFFICACY: | 71 lm/W |



| | |
|--------------------|-------------------|
| MODEL: | AMTN35-210E230SWT |
| BEAM ANGLE: | 28° |
| POWER: | 2*11W` |
| LUMENS: | 2*790 lm |
| CBCP: | 2*3511 cd |
| EFFICACY: | 71 lm/W |


ULTRA - MODEL: AMTN35

WAC LIGHTING


3" Recessed Dual-head Downlight

PROJECT :


TYPE:




MODEL: AMTN35-213E230SWT
BEAM ANGLE: 28°
POWER: 2*15W
LUMENS: 2*1035 lm
CBCP: 2*4511 cd
EFFICACY: 69 lm/W




MODEL: AMTN35-207E330SWT
BEAM ANGLE: 36°
POWER: 2*9W
LUMENS: 2*643 lm
CBCP: 2*1497 cd
EFFICACY: 71 lm/W




MODEL: AMTN35-210E330SWT
BEAM ANGLE: 36°
POWER: 2*11W
LUMENS: 2*804 lm
CBCP: 2*1857 cd
EFFICACY: 73 lm/W




MODEL: AMTN35-213E330SWT
BEAM ANGLE: 36°
POWER: 2*15W
LUMENS: 2*1024 lm
CBCP: 2*2375 cd
EFFICACY: 68 lm/W




MODEL: AMTN35-207E530SWT
BEAM ANGLE: 50°
POWER: 2*9W
LUMENS: 2*425 lm
CBCP: 2*574 cd
EFFICACY: 47 lm/W



MODEL: AMTN35-210E530SWT
BEAM ANGLE: 50°
POWER: 2*11 W
LUMENS: 2*532 lm
CBCP: 2*717 cd
EFFICACY: 48 lm/W



MODEL: AMTN35-213E530SWT
BEAM ANGLE: 50°
POWER: 2*15W
LUMENS: 2*677 lm
CBCP: 2*914 cd
EFFICACY: 45 lm/W



MODEL: AMTN35-208E30SWT
BEAM ANGLE: 8°
POWER: 2*10W
LUMENS: 2*375 lm
CBCP: 2*9280 cd
EFFICACY: 38 lm/W

ULTRA - MODEL: AMTN45

WAC LIGHTING

4" Recessed Dual-head Downlight


PROJECT :

TYPE:

Product Image



Line Drawing

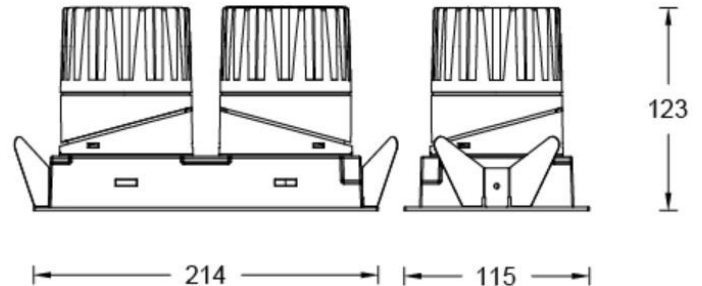

Product Description

ULTRA series LED narrow side recessed multiples lamps, through a unique Angle adjustment method, taking into account the function of downlight and adjustable (one lamp multi-purpose). The whole lamp sealing design ensures that there is no light leakage during the adjustment process, the lamp adopts the modular design, the on-site lamp can be freely disassembled and replaced the reflector and the lamp body, so as to achieve a variety of specifications and the free switching of light mode, and the perfect integration of the ceiling after installation. Optical uses a new hidden light technology, good anti-glare performance and color consistency control, with comfortable light effect, mainly suitable for hotels, villas and commercial space and other indoor places.

Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens + anti-glare reflector
- Finish: Static electricity powder coating
- Adjustable Angle: Vertical: 0-30° , Horizontal: 0-360°
- Accessories: As attached
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class II
- Operating Temperature: -20°C~40°C

Product Specifications

- Cut-out: 200*100mm
- Ceiling Thickness: 5mm~25mm
- Shielding Angle: 35°
- LED Type: COB
- Source Lm: Single-head as follows, Two-head×2
 2700K: 8W 682lm; 13W 1530lm; 18W 2065lm; 25W 2755lm
 3000K: 8W 720lm; 13W 1645lm; 18W 2220lm; 25W 2960lm
 3500K: 8W 752lm; 13W 1680lm; 18W 2270lm; 25W 3025lm
 4000K: 8W 765lm; 13W 1770lm; 18W 2390lm; 25W 3185lm
 5000K: 8W 774lm; 13W 1780lm; 18W 2405lm; 25W 3205lm
- LED Lifetime: >36000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/3500K/4000K/5000KCRI≥90
- Input: 220V AC / 50Hz
- Dimming: On-off /0-10V/DALI
- Net Weight:: 1.6Kg without packing

Order Model

| Model | Size | Trim | LED | Driver | Beam | CCT | Reflector | Finish |
|---|---------|------------------------------|---------------|--------------------------------|----------|----------|-----------------------|----------|
| AMTN Multiple Downlight N series | 4 4" | 5 Rectangular Trimless | 208 COB 2*8W | E On-Off D 0-10V Dimming | S 8° | 27 2700K | B Black S Specular | WT White |
| | | | 213 COB 2*13W | | N 13° | 30 3000K | | BK Black |
| | | | 218 COB 2*18W | | 1 19° | 35 3500K | | |
| | | | 225 COB 2*25W | 2 28° | 40 4000K | | | |
| | | | 225 COB 2*25W | 3 36° | 50 5000K | | | |
| | | | 225 COB 2*25W | N No Driver A DALI | 5 50° | | | |

Example: AMTN45-218E230SWT

WAC Lighting
www.waclighting.com (US)
www.waclighting.net (International)

Headquarters
 44 Harbor Park Drive • Port Washington, NY
 Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting Technology (Shanghai) Co, Ltd.
 14,Lane 299, Bi Sheng Road,Shanghai 201204
 Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

4" Recessed Dual-head Downlight

PROJECT :


TYPE:

Accessories

| | | |
|--|--|---|
| <p>LENS-16-BEL-C Striped glass lens</p>  | <p>LENS-16-BSL-SW Soft glass lens</p>  | <p>LENS-16-HCL-ULTRA Honeycomb</p>  |
|--|--|---|

Note: Up to one optical accessory can be added, the product does not come with accessories, need to order separately

LIGHT DISTRIBUTION@3000K LUMINAIRE DATA



MODEL: AMTN45-213EN30SWT


BEAM ANGLE: 13°

POWER: 2*15W

LUMENS: 2*969 lm

CBCP: 2*8386 cd

EFFICACY: 65 lm/W



MODEL: AMTN45-218EN30SWT


BEAM ANGLE: 13°

POWER: 2*21W

LUMENS: 2*1309 lm

CBCP: 2*11333 cd

EFFICACY: 62 lm/W



MODEL: AMTN45-225EN30SWT


BEAM ANGLE: 13°

POWER: 2*29W

LUMENS: 2*1716 lm

CBCP: 2*14853 cd

EFFICACY: 59 lm/W



MODEL: AMTN45-213E130SWT


BEAM ANGLE: 19°

POWER: 2*15W

LUMENS: 2*1135 lm

CBCP: 2*5812 cd

EFFICACY: 76 lm/W



MODEL: AMTN45-218E130SWT


BEAM ANGLE: 19°

POWER: 2*21W

LUMENS: 2*1533 lm

CBCP: 2*7854 cd

EFFICACY: 73 lm/W



MODEL: AMTN45-225E130SWT


BEAM ANGLE: 19°

POWER: 2*29W

LUMENS: 2*2009 lm

CBCP: 2*10294 cd

EFFICACY: 69 lm/W



MODEL: AMTN45-213E230SWT


BEAM ANGLE: 28°

POWER: 2*15W

LUMENS: 2*1327 lm

CBCP: 2*5429 cd

EFFICACY: 88 lm/W



MODEL: AMTN45-218E230SWT

BEAM ANGLE: 28°

POWER: 2*21W

LUMENS: 2*1793 lm

CBCP: 2*7336 cd

EFFICACY: 85 lm/W


ULTRA - MODEL: AMTN45

WAC LIGHTING


4" Recessed Dual-head Downlight

PROJECT :


TYPE:




MODEL: AMTN45-225E230SWT
BEAM ANGLE: 28°
POWER: 2*29W
LUMENS: 2*2351 lm
CBCP: 2*9615 cd
EFFICACY: 81 lm/W




MODEL: AMTN45-213E330SWT
BEAM ANGLE: 36°
POWER: 2*15W
LUMENS: 2*1268 lm
CBCP: 2*2722 cd
EFFICACY: 85 lm/W




MODEL: AMTN45-218E330SWT
BEAM ANGLE: 36°
POWER: 2*21W
LUMENS: 2*1714 lm
CBCP: 2*3679 cd
EFFICACY: 82 lm/W




MODEL: AMTN45-225E330SWT
BEAM ANGLE: 36°
POWER: 2*29W
LUMENS: 2*2246 lm
CBCP: 2*4821 cd
EFFICACY: 77 lm/W




MODEL: AMTN45-213E530SWT
BEAM ANGLE: 50°
POWER: 2*15W
LUMENS: 2*1237 lm
CBCP: 2*1843 cd
EFFICACY: 82 lm/W



MODEL: AMTN45-218E530SWT
BEAM ANGLE: 50°
POWER: 2*21W
LUMENS: 2*1671 lm
CBCP: 2*2490 cd
EFFICACY: 80 lm/W



MODEL: AMTN45-225E530SWT
BEAM ANGLE: 50°
POWER: 2*29W
LUMENS: 2*2190 lm
CBCP: 2*3263 cd
EFFICACY: 76 lm/W



MODEL: AMTN45-208ES30SWT
BEAM ANGLE: 8°
POWER: 2*10W
LUMENS: 2*375 lm
CBCP: 2*9280 cd
EFFICACY: 38 lm/W