


Installation Precautions:

1. Please read through the Instructions before installation.
2. The product should be installed by a professional electrician.
3. Make sure the power supply is cut off before installation and maintenance, to avoid the risk of electric shock.
4. Install in accordance with national electric code, and local regulations.
5. Please keep this Instruction properly for future reference.

Light Installation:

1. Install plastic anchor according to the hole positions on the mounting plate, and reserve or process wire holes (plastic anchor are in the parts package), as shown in Fig 1.
2. Take the mounting plate out of the lamp and fix it to the plastic anchor with 4 pc self-tapping screws (in the parts package), as shown in Fig.2 and Fig.3.

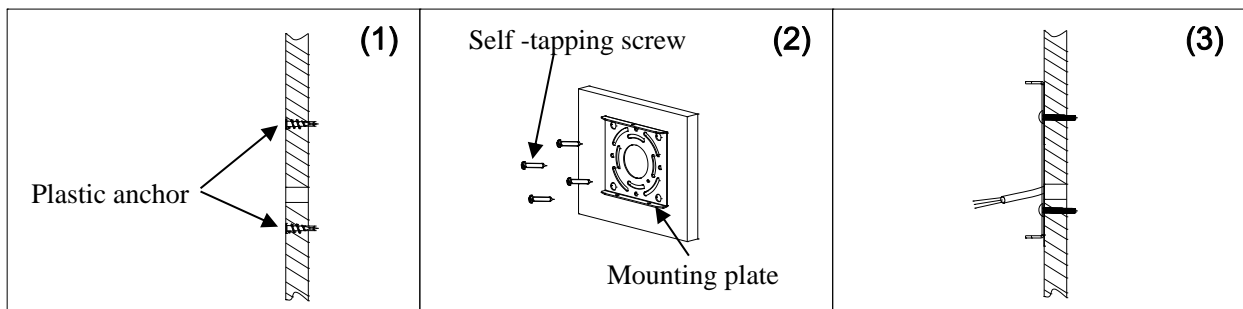

3. Connect the mains power input wire to the lamp power wire and lamp dimming wire to the dimmer with the waterproof junction box as shown in Fig.4.(The lamp not include waterproof junction box and only lamp with dimming function have dimming wire.). Attention: The yellow green wire is the ground wire (⊕), the Hot wire is labeled with "L", and the Neutral wire is labeled with "N", dimming wires are labeled with "+" and "-". (Only applicable to dimming function lamps)
4. Install the lamp mounting base onto the mounting plate already installed in step 2, align the three screw holes of the mounting base with the screw holes of the mounting plate, insert the waterproof rubber ring, tighten the hex socket screw, and insert the silicone plug (silicone plug are in the parts package, the lamp not include Allen key). As shown in Fig.5 and Fig.6.

Note: If connect wires not use the waterproof junction box, please apply waterproof adhesive between the lamp mounting base and the installation surface after the lamp installation is completed.

