

# PALOMA SMART - MODEL: TL58F

Motorized Track Light




PROJECT :

TYPE :

## Product Image



## Line Drawing

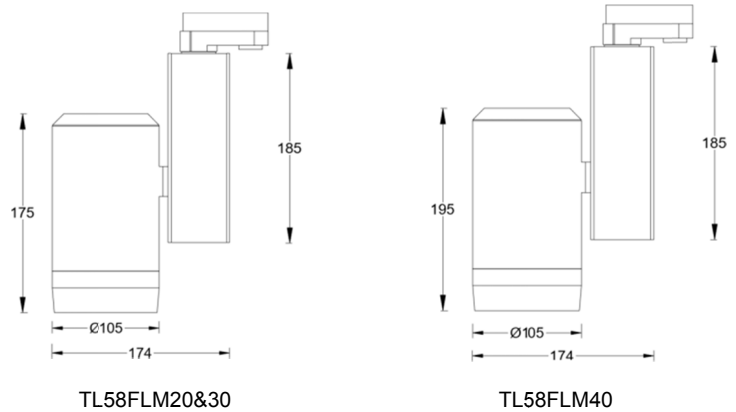

## Product Description

The PALOMA PRO smart remote-controlled track light series features a sophisticated design that carefully combines advanced motor and wireless technologies to provide efficient lighting solutions while offering users a diverse lighting experience. Users can choose individual or multiple lights from the app interface or customize various scenes, bringing great flexibility to architectural and technical lighting. It is also compatible with the WAC three-circuit track system.

## Product Features

- Body Material: Aluminum alloy die-casting
- Optical System: Lens
- Finish: Static electricity powder coating
- Projection direction: Horizontal adjustment range: 0° to 355°; Vertical adjustment range: 0° to 90°
- Accessories: Remote control (must be ordered separately and can control up to 10 lights simultaneously)
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C

## Product Specifications

- Beam angle: Adjustable angle from 11° to 55°
- LED Type: COB
- LED Power: 20W、30W or 40W
- Source Lm: 2700K:1450lm(20W) / 2200lm(30W) / 2900lm(40W) 6500K:1750lm(20W) / 2600lm(30W) / 3400lm(40W)
- LED Lifetime: >50000h-L70 / B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K-6500K , Ra90
- SDCM: 3 SDCM
- Input: 220V~240V AC / 50Hz
- Dimming: APP/ Remote control (0-10V /DMX512)
- Net Weight: 2.68Kg without packing

## Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
TL58F PALOMA Smart	LM20 COB 20W	B APP G Remote control D Remote control +0-10V M Remote control +DMX512	F 11°-55°	9 90	CC 2700K-6500K	WT White
	LM30 COB 30W					BK Black
	LM40 COB 40W					
TL58F	LM20	G	F	9	CC	WT

Example : TL58FLM20-G-F9CCWT

## Accessories

WAC Lighting  
www.waclighting.com (US)  
www.waclighting.com.cn (China)

Headquarters  
44 Harbor Park Drive • Port Washington, NY  
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)  
14,Lane 299, Bi Sheng Road, Shanghai 201204,China  
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598






# PALOMA SMART - MODEL: TL58F

Motorized Track Light




PROJECT :

TYPE :


Class 1 Accessories	<b>LENS-25-BEL-SW</b> striped glass 	<b>LENS-25-BSL</b> soft light glass lens 	<b>LENS-25-FR-SW</b> Matte glass lens 	<b>LENS-25-LCM-SW</b> Edgeless Bee Mesh 
Class 2 Accessories	<b>LENS-25-SNOOT-SW</b> Anti-glare cylinder 	<b>LENS-25P-CRL-BK</b> Anti-glare plastic cross grid 	<b>LENS-25-HCL</b> Anti-glare bee mesh grille 	
remote control	<b>PAD-TL58S-WT</b> Handheld Remote Controller 			

Note: Each type of accessory can only be installed at most one at a time, and they all need to be ordered separately.


## LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

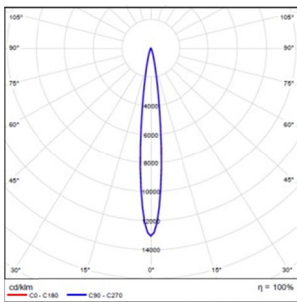


**MODEL :** TL58FLM20-G-F9CC  
**BEAM ANGLE :** 11°  
**POWER :** 24W  
**LUMENS :** 362lm  
**CBCP :** 4728cd  
**EFFICACY :** 15lm/W

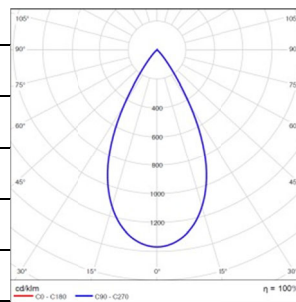


**MODEL :** TL58FLM20-G-F9CC  
**BEAM ANGLE :** 55°  
**POWER :** 24W  
**LUMENS :** 1160lm  
**CBCP :** 1588cd  
**EFFICACY :** 48lm/W

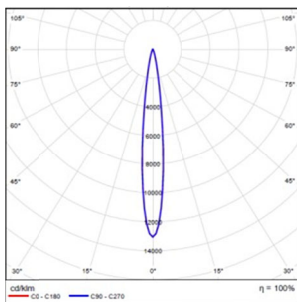


**MODEL :** TL58FLM30-G-F9CC  
**BEAM ANGLE :** 11°  
**POWER :** 34W  
**LUMENS :** 492lm  
**CBCP :** 6425cd  
**EFFICACY :** 15lm/W

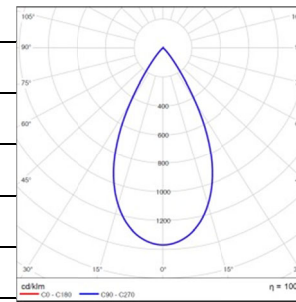

**MODEL :** TL58FLM30-G-F9CC  
**BEAM ANGLE :** 55°  
**POWER :** 34W  
**LUMENS :** 1536lm  
**CBCP :** 2102cd  
**EFFICACY :** 45lm/W

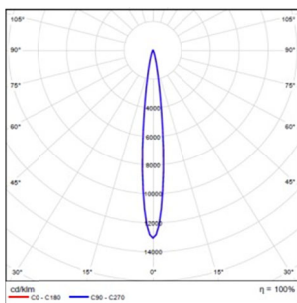

**MODEL :** TL58FLM40-G-F9CC  
**BEAM ANGLE :** 11°  
**POWER :** 45W  
**LUMENS :** 606lm  
**CBCP :** 7914cd  
**EFFICACY :** 13lm/W

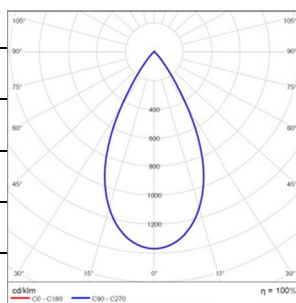

**MODEL :** TL58FLM40-G-F9CC  
**BEAM ANGLE :** 55°  
**POWER :** 45W  
**LUMENS :** 1920lm  
**CBCP :** 2628cd  
**EFFICACY :** 43lm/W