


Installation Precautions:

1. Please read the instructions carefully before installation;
2. Ask a professional electrician to install;
3. In order to avoid the danger of electric shock, please confirm to turn off the power supply before installation and maintenance;
4. Before installing the lamp, please confirm that the mounting surface is firm and reliable to avoid loosening and falling off the lamp;
5. Keep the manual for reference.

Light Installation and Wiring:

1. As shown in Figure 1, take out the mounting bracket on the lamp, drill a hole in the installation position, and install the gecko; Open the accessories bag, install the level on the installation support (for horizontal alignment of the installation support), and fix the installation support with self-tapping screws (pay attention to the direction, one side of the level is close to the ceiling);
2. The installation size between the lamp and the lamp is shown in figure 2;
3. Fix the steel cable on the mounting bracket (3) as shown in the figure;
4. Lamp wiring: Connect the wire according to the label on the lamp wire ④ as shown in the figure (do waterproof treatment at the wiring);
5. Lamp installation: Put the lamp into the installation bracket (align with the gap), then move the lamp to the right, tighten the screws on the side of the lamp with a hex wrench ($\Phi 2.5\text{mm}$) (Note: a level can be installed on the lamp body for the horizontal direction of the lamp) as shown in the figure 5;
6. Lamp adjustment; Use a hex wrench ($\Phi 4\text{mm}$) to loosen the adjusting fixing screw of the lamp, and then adjust the lamp to the required position by hand (adjustable 15° up and down), and then fix the screw.

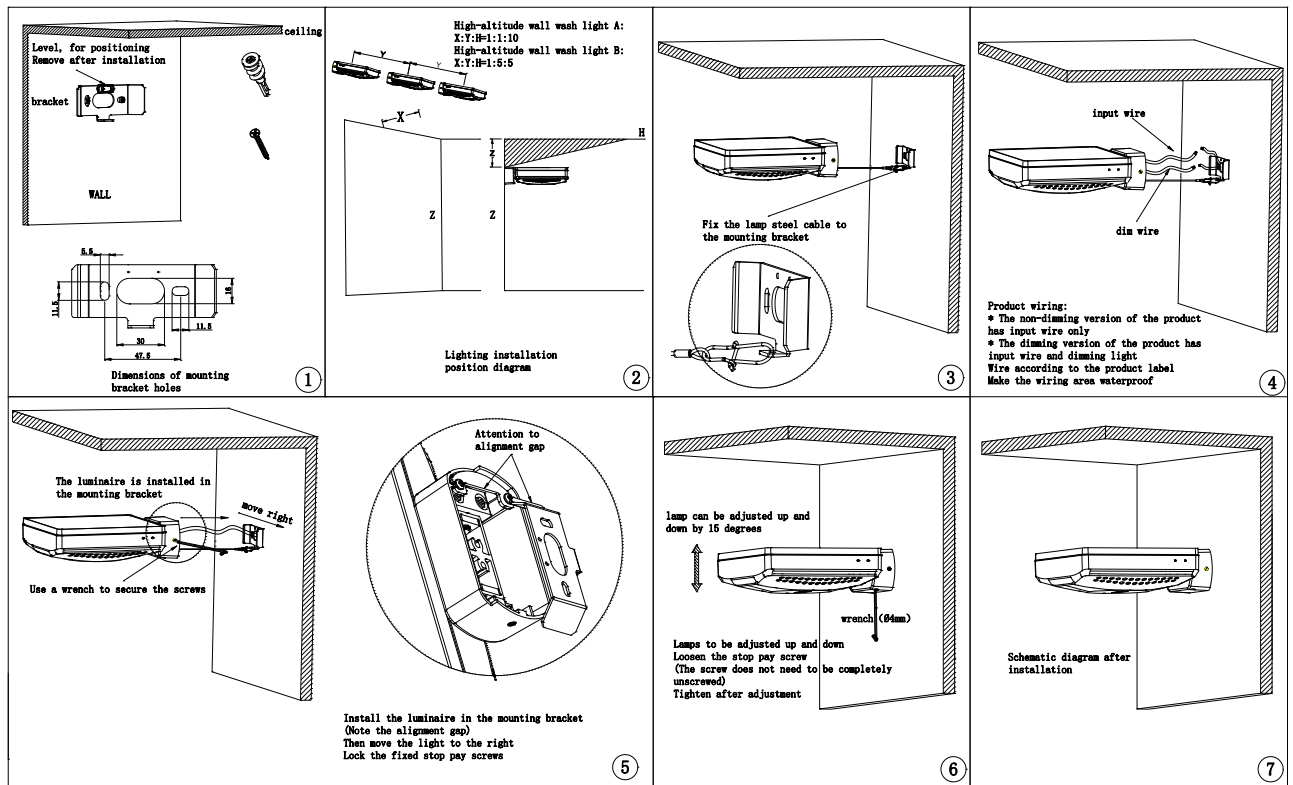

Specify:

1, the cable is not attached, the waterproof 3-core cable is used, the diameter of the cable is $\text{Ø}5\text{-}\text{Ø}9\text{mm}$ (the mark on the connector: Firewire L;Zero line N;Ground wire);

Note:

1. Lamps with damaged glass protective cover need to be replaced during installation;