

SILO WALL WASHER- MODEL: ME15WLM

Surface Mounted Luminaires




PROJECT :

TYPE :

Product Image



Line Drawing

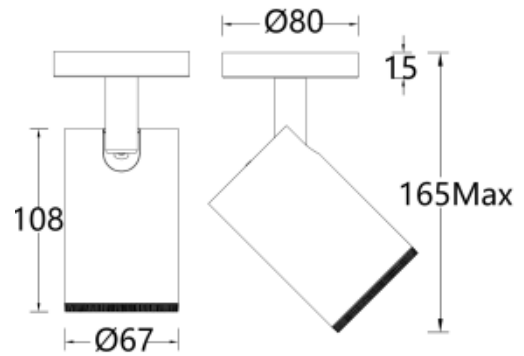

Product Description

SILO Wall Washer(referred to as WW) series LED ceiling spotlights with exquisite design, no visible radiator, die-cast aluminum body, built-in no stroboscopic drive, COB light module, providing a variety of standard color temperature options, with excellent wall washing light distribution and excellent color rendering., are widely used in museums, art galleries, commercial Spaces, hotels, retail and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Double lens
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0°~355°; Vertical 0°~90°
- Accessories/Brackets: Optional light shade
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 0.5Kg without packing

Product Specifications

- LED Type: COB
- LED Power: 6W or 12W optional
- Source Lm: 2700K: 760lm(6W)/1260lm(12W)
3000K: 800lm(6W)/1330lm(12W)
4000K: 850lm(6W)/1410lm(12W)
5000K: 860lm(6W)/1420lm(12W)
- LED Lifetime: >50000h-L70 /B10-Ta25°C (LM-80/TM-21)
- CCT/CRI: 2700K/3000K/4000K/5000K, > Ra90
- SDCM: 3SDCM
- Input: 220V~240V AC/50Hz
- Dimming: Dimming with built-in knob (10%~100%), 0-10V (A match test is required)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ME15W SILO WW	LM06 COB 6W	O On-board	W Wash	9 90	27 2700K	WT White BK Black
	LM12 COB 12W	D 0-10V			30 3000K	
					40 4000K	
					50 5000K	
ME15W	LM12	O	W	9	30	WT

Example : ME15WLM12-O-W930WT

SILO WALL WASHER- MODEL: ME15WLM
Surface Mounted Luminaires



PROJECT :


TYPE :

Accessories


Four leaf shade
TL-21-BD-SW



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

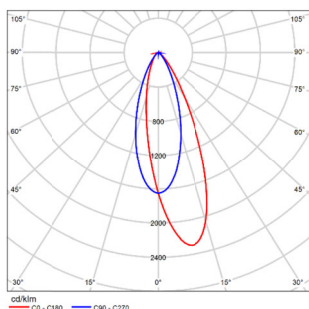

MODEL : ME15WLM06-O-W930
BEAM ANGLE : Wall washer
POWER : 8W
LUMENS : 519 lm
CBCP : /
EFFICACY : 65 lm/W

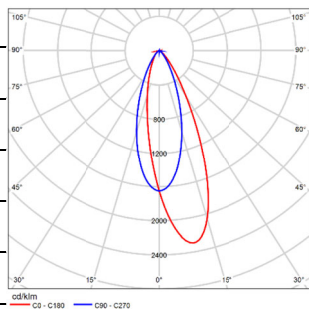

MODEL : ME15WLM12-O-W930
BEAM ANGLE : Wall washer
POWER : 15W
LUMENS : 822 lm
CBCP : /
EFFICACY : 55 lm/W

SILO WALL WASHER- MODEL: ME16WLM

Surface Mounted Luminaires

WAC


PROJECT :

TYPE :

Product Image



Line Drawing

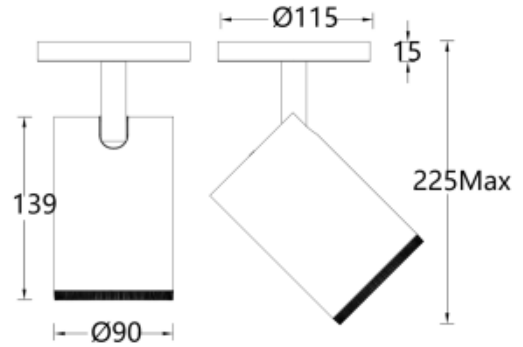

Product Description

SILO Wall Washer(referred to as WW) series LED ceiling spotlights with exquisite design, no visible radiator, die-cast aluminum body, built-in no stroboscopic drive, COB light module, providing a variety of standard color temperature options, with excellent wall washing light distribution and excellent color rendering., are widely used in museums, art galleries, commercial Spaces, hotels, retail and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Double lens
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0°~355°; Vertical 0°~90°
- Accessories/Brackets: Optional light shade
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.0Kg without packing

Product Specifications

- LED Type: COB
- LED Power: 18W or 26W optional
- Source Lm: 2700K: 2030lm(18W)/2710lm(26W)
3000K: 2120lm(18W)/2830lm(26W)
4000K: 2230lm(18W)/2970lm(26W)
5000K: 2330lm(18W)/3100lm(26W)
- LED Lifetime: >50000h-L70 /B10-Ta25°C (LM-80/TM-21)
- CCT/CRI: 2700K/3000K/4000K/5000K, > Ra90
- SDCM: 3SDCM
- Input: 220V~240V AC/50Hz
- Dimming: Dimming with built-in knob (10%~100%), DALI, 0-10V (A match test is required)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ME16W SILO WW	LM18 COB 18W	O On-board	W Wash	9 90	27 2700K	WT White BK Black
	LM26 COB 26W	D 0-10V			30 3000K	
		A DALI			40 4000K	
					50 5000K	
ME16W	LM18	O	W	9	30	WT

Example : ME16WLM18-O-W930WT

WAC Lighting
www.wacighting.com (US)
www.wacighting.com.cn (China)

Headquarters
44 Harbor Park Drive • Port Washington, NY
Phone (516) 515.5000 • Fax (516) 515.5050

WAC Lighting(Shanghai)
14,Lane 299, Bi Sheng Road, Shanghai 201204,China
Phone (86.21) 3393.3558 • Fax (86.21) 3362.1598

WAC Lighting reserves the right to periodically design and update products.2024-03-07

SILO WALL WASHER- MODEL: ME16WLM
Surface Mounted Luminaires

WAC

PROJECT :


TYPE :

Accessories


Four leaf shade
LENS-73-BD



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

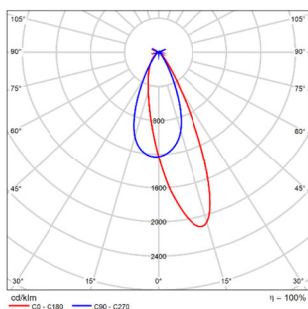

MODEL : ME16WLM18-O-W930
BEAM ANGLE : Wall washer
POWER : 21W
LUMENS : 1555 lm
CBCP : /
EFFICACY : 74 lm/W

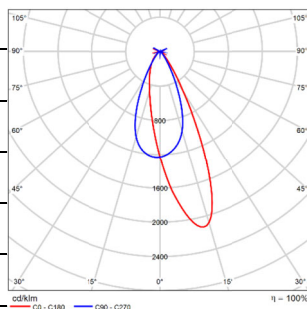

MODEL : ME16WLM26-O-W930
BEAM ANGLE : Wall washer
POWER : 30W
LUMENS : 2061 lm
CBCP : /
EFFICACY : 69 lm/W

SILO WALL WASHER- MODEL: ME17WLM

Surface Mounted Luminaires




PROJECT :

TYPE :

Product Image



Line Drawing

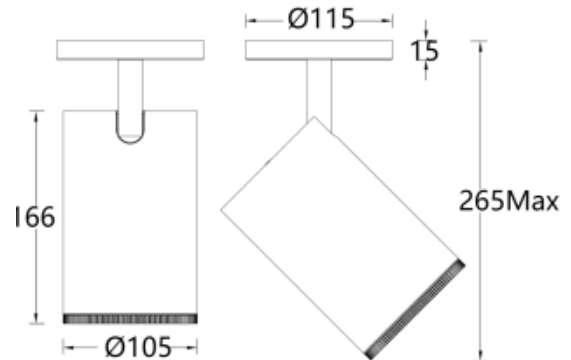

Product Description

SILO Wall Washer(referred to as WW) series LED ceiling spotlights with exquisite design, no visible radiator, die-cast aluminum body, built-in no stroboscopic drive, COB light module, providing a variety of standard color temperature options, with excellent wall washing light distribution and excellent color rendering., are widely used in museums, art galleries, commercial Spaces, hotels, retail and other places.

Product Features

- Body Material: Aluminum alloy die-cast lamp body
- Optical System: Double lens
- Finish: Electrostatic Powder coating, Black (BK), White (WT)
- Adjustable Angle: Horizontal 0°~355°; Vertical 0°~90°
- Accessories/Brackets: Optional light shade
- Certification: CCC
- IP Rating: IP20
- Insulation Level: Class I
- Operating Temperature: -20°C~40°C
- Net Weight: 1.4Kg without packaging

Product Specifications

- LED Type: COB
- LED Power: 34W1
- Source Lm: 2700K: 3390lm/3000K 3530lm
4000K: 3710lm/5000K 3880lm
- LED Lifetime: >50000h-L70 /B10-Ta25°C(LM-80/TM-21)
- CCT/CRI: 2700K/3000K/4000K/5000K, > Ra90
- SDCM: 3SDCM
- Input: 220V~240V AC/50Hz
- Dimming: Dimming with built-in knob (10%~100%), DALI, 0-10V (A match test is required)

Order Model

Model	LED	Dimming	Beam	CRI	CCT	Finish
ME17W SILO WW	LM34 COB 34W	O On-board	W Wash	9 90	27 2700K	WT White BK Black
		D 0-10V			30 3000K	
		A DALI			40 4000K	
					50 5000K	
ME17W	LM34	O	W	9	30	WT

Example : ME17WLM34-O-W930WT

SILO WALL WASHER- MODEL: ME17WLM

Surface Mounted Luminaires

WAC

PROJECT :


TYPE :

Accessories

Four leaf shade
TL-22-BD-SW



LIGHT DISTRIBUTION@3000K LUMINAIRE DATA

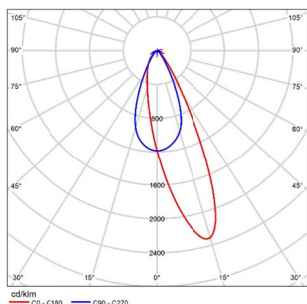

MODEL : ME17WLM34-O-W930

BEAM ANGLE : Wall washer

POWER : 38W

LUMENS : 2464 lm

CBCP : /

EFFICACY : 65 lm/W