

# VOLO- MODEL: OP1L

## Linear Luminaires


# WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

### Product Image

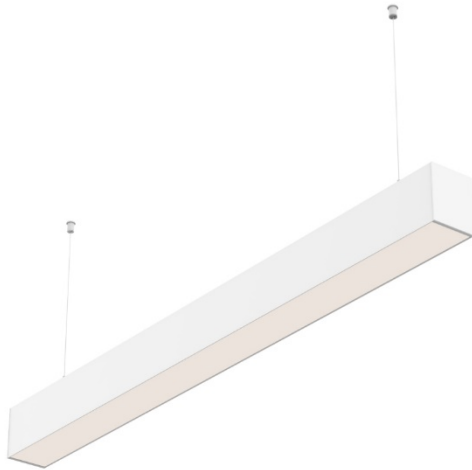

### Line Drawing

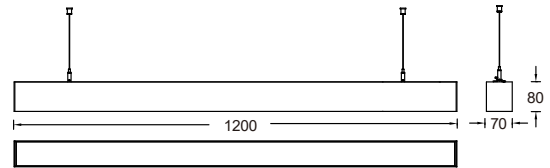

### Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

### Product Features

- **Body Materials:** Aluminum Extruded Lamp Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I

### Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
- **Net Weight:** Approx. 2.7Kg, excluding packaging

### Order Model

Model	Comment	Length (mm)	Power (mm)	Driver	Beam	CCT	Finish
OP1L	S Single Directional	12 1200	40 40W	E On-Off	P Matte Cover	30 3000K	WT White
				D 0-10V Dimming	Y Prism Cover	35 3500K	BK Black
				A DALI		40 4000K	
						50 5000K	

Example: OP1LS-1240E-P30WT

# VOLO- MODEL: OP1L

## Linear Luminaires


# WAC LIGHTING

Responsible Lighting®


Project Name:

Type:

### Product Image

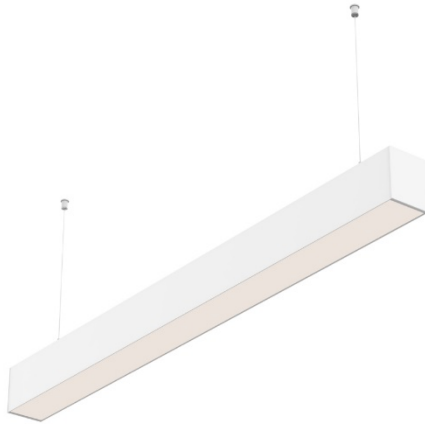

### Line Drawing

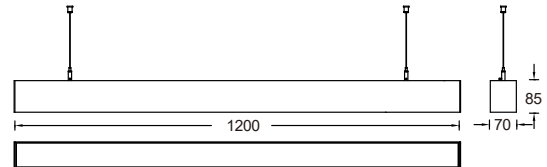

### Product Description

VOLO Pendant Linear Light, with aluminum body, compact and aesthetic appearance. LED light source, with good heat dissipation. Energy efficient, good anti-glare, customized lengths and connectable at the beginning and end. Suitable for commercial office lighting applications.

### Product Features

- **Body Materials:** Aluminum Extruded Lamp Body
- **Optical System:** Anti-glare Panel
- **Finishes:** Electrostatic Powder Coating
- **Objection Direction:** /
- **Accessory/Bracket:** /
- **Certification:** CCC
- **IP Rating:** IP20
- **Insulation Level:** Class I

### Product Specifications

- **Shading Angle:** /
- **LED Type:** SMD LED
- **Source Lm:** /
- **LED Lifetime:** > 50,000h-L70 /B10-Ta25°C(LM-80/TM-21)
- **CCT/CRI:** 3000K/ 3500K/4000K/5000K, Ra90
- **SDCM:** 3 SDCM
- **Input:** 220V-240V AC / 50Hz
- **Dimming:** ON-OFF/0-10V/DALI (Matching tests must be done with the project site systems)
  
- **Net Weight:** Approx. 2.2Kg, excluding packaging

### Order Model

Model	Comment	Length (mm)	Power (mm)	Driver	Beam Up	Beam Down	CCT	Finish
OP1L	D Double Directional	12 1200	55 45W Downward-illuminated +10W Upward-illuminated	E On-Off D 0-10V Dimming A DALI	F Frosted	P Matte Cover	30 3000K	WT White
						Y Prism Cover	35 3500K	BK Black
							40 4000K	
							50 5000K	

Example: OP1LD-1255E-FY40WT